


INSTALLATION INSTRUCTIONS

Model IN-3-XX Indicator Panel

The Model IN-3-XX Indicator Panel contains an ammeter to indicate battery charger output current and a neon indicator to indicate power input to the vehicle. The panel is designed to cover a 2 1/2" hole in the vehicle.

To Mount the IN-3-XX:

1. Locate a suitable spot on the vehicle and mark the center of the desired location.
2. Place the panel over the "center mark" so that the opening is precisely in the middle of the rectangular opening.
3. Mark the location of the four corner holes.
4. Center-Punch the "center mark" and the four corner holes.
5. Drill out the center hole with a 2 1/2" hole saw and the four corner holes with a 5/32" diameter drill.
6. Remove the protective laminate from the front of the panel and assemble the meter and neon indicator to the panel.
7. Connect the neon indicator so that it is energized when power is applied to the vehicle (see schematic).
8. Mount panel to the vehicle with the four # 6-32 screws provided.
9. Connect the ammeter in series with the common output of the charger (see schematic).

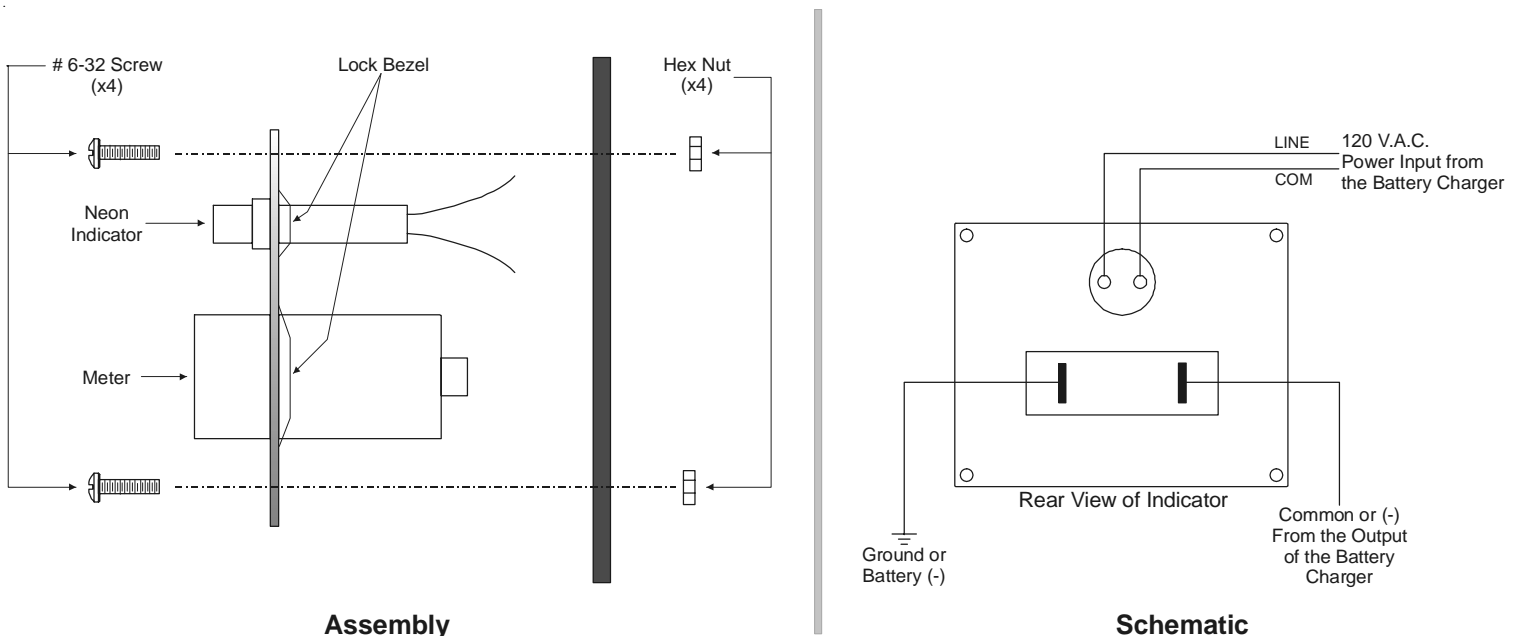

SINCE 1967, DESIGNERS OF INNOVATIVE PRODUCTS

KUSSMAUL ELECTRONICS COMPANY, INC.

170 CHERRY AVENUE, WEST SAYVILLE, NEW YORK, 11796-1221 USA

TEL. In NY: 631 567-0314

TOLL FREE: 800 346-0857

FAX: 631 567-5826