

AUTO CHARGE[®] 20

STANDARD TRIPLE SYSTEM AUTOMATIC BATTERY CHARGER



MODEL # 091-10-12

The Auto Charge 20 is a fully automatic battery charger for vehicles with three independent batteries which must be charged. The charger contains 3 separate and independent circuits, 1 for each battery. Each battery is independently sensed and charged as required. Even though the total for all three outputs is limited to 20 amperes any one of the batteries may receive up to 20 amperes if the other batteries do not require a charge. Rugged construction permits vehicle mounting or the charger may be wall mounted.

SPECIFICATIONS:

Input: 120 Vac, 50/60 Hz, 4.7 Amps Max

Input Fuse: 5 Amps, Fast Acting

Output: 12 Vdc, 20 Amps

Output Fuse (Recommended): 40 Amps

Charge Indicator: 0-25 Amps

Weight: 22 lbs

Warranty: 3 Years



ENERGIZED AND READY, WHEN SECONDS COUNT

20 AMPS FOR CHARGING VEHICLE BATTERIES

DESIGNED SPECIFICALLY FOR VEHICLES WITH TRIPLE BATTERY SYSTEMS

EACH BATTERY IS SENSED & CONTROLLED INDIVIDUALLY

AMP METER INDICATES CHARGE RATE

CURRENT LIMITED OUTPUT CANNOT OVERCHARGE THE BATTERIES

3 YEAR WARRANTY

OPTIONAL INDICATORS

BAR GRAPH DISPLAY



Model 091-118-022-12


10 Element, Weatherproof Triple Bar Graph battery condition display.

LOW COST LED INDICATOR



Model 091-11-102-12

LED Indicator shows when the charger is "ON" and when it is "CHARGING".

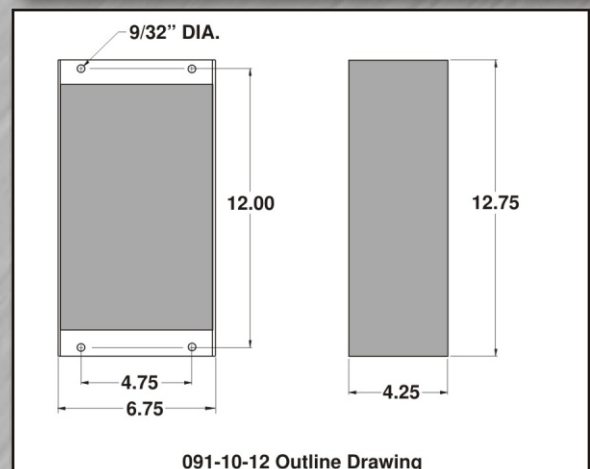

091-10-12 Outline Drawing