

# AUTO CHARGE<sup>®</sup> T

## TRANSIENT SUPPRESSED SINGLE SYSTEM BATTERY CHARGER



MODEL # 091-80-12

The Auto Charge T Transient Suppressed is a fully automatic battery charger for a single battery system. This float charger is transient protected to ANSI/IEE C37.90.1-1989 standard. Ideal for maintaining batteries in circuit breaker applications for electric utilities. Similar to Auto Charge 2 except higher output current. It is ruggedly constructed for mounting.

### SPECIFICATIONS:

**Input:** 120 Vac, 50/60 Hz, 2.5 Amps Max

**Input Fuse:** 5 Amps, Fast Acting

**Output:** 12 Vdc, 12 Amps

**Output Fuse (Recommended):** 24 Amps

**Charge Indicator:** LED's

**Weight:** 12 lbs

**Warranty:** 3 Years



ENERGIZED AND READY, WHEN SECONDS COUNT

**12 AMPS FOR CHARGING VEHICLE BATTERIES**

**AUTOMATICALLY CHARGES BATTERY**

**MEETS THE ANSI/IEEE C37.90.1-1989 STANDARD**


**HIGH VOLTAGE FLOAT CHARGER**

**TRANSIENT SUPPRESSED FOR INSTALLATIONS IN HIGH EMI LOCATIONS**

**LOW RIPPLE OUTPUT**

**NO WATER BOIL OFF**

**3 YEAR WARRANTY**

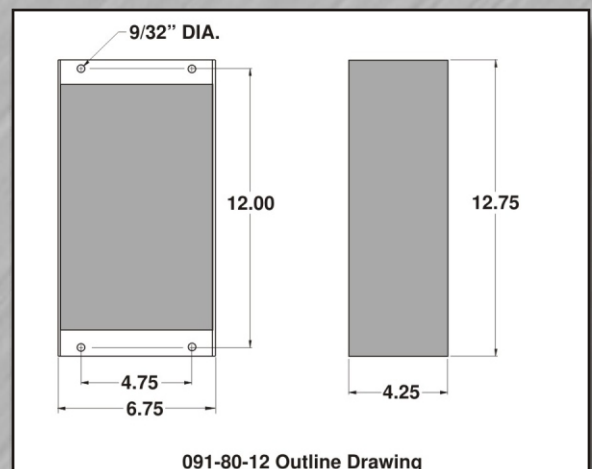

091-80-12 Outline Drawing