



2024

**ENERGIZED AND READY  
WHEN SECONDS COUNT**

## 1967

Ernest A. (Ernie) Kussmaul founded Kussmaul Electronics. A solution-oriented company that eventually became the standard for power products in the emergency vehicle market.

## 1975

The first Kussmaul Battery Charger was born.



## 1985

The first Auto and Air Eject was introduced.



## 1990's

The first Automatic Load Shedding System was designed.



## 2000's

The 30 Amp Auto Eject was introduced. The 2000 decade brought the Digital Status Center.



## 2015

The first battery chargers with patented parasitic load compensation (PLC) were developed.



## 2018

Dashboard accessories, Solar Panels expand the line Super Auto Eject Deluxe Covers were introduced.



## 2020

Advancements in PCL and smart charging technologies for a new generation of Low Profile Battery Chargers and Inverter Chargers.



## 2022








Innovative technologies developed to reduce carbon emissions and vehicle overhead with new Green Power Systems for emergency vehicles.

**FREEDOMeGEN**  
BY MISSION CRITICAL ELECTRONICS

**ZERO RPM**  
A MISSION CRITICAL ELECTRONICS BRAND



# TABLE OF CONTENTS


Section	Description	Page
 1	<b>Green Power Solutions</b> Freedom eGen, ZeroRPM	2 - 3
 2	<b>Battery Charger and Battery Savers</b> Battery Selection Guide: Single and Multiple Battery Bank Systems Battery Charger and Batter Savers	4 - 25
 3	<b>Battery Indicators and Meters</b> Digital Displays, Remote Bar Graph Displays, Analog and LED, Test and Digital Displays	26 - 31
 4	<b>Ejection Units</b> Air, Electric, Covers and Nameplates, Wiring Accessories	32 - 41
 5	<b>Air Compressors</b> Pump Accessories, 12 Volt DC, 120 Volt AC, 120 Volt AC HP	42 - 45
 6	<b>Kits and Packages</b> Pump Plus Chargers, Kits and Packages	46 - 54
 7	<b>Solar Power Charging</b>	55 - 56
 8	<b>120/240 VAC Equipment</b> Power Distribution Panels, Power Transfer Switches, Inverters- Chargers, Inverters	57 - 61
 9	<b>DC Power Management</b> Mobile DC UPS, Load Management, Relays, PDS -100	62 - 75
 10	<b>Installation Accessories</b> Mounting Plates, Circuit Protection, Junction Boxes, Wire Thru fittings, Bus Bars, Terminal Strips	76 - 80
 11	<b>Engine and Vehicle Accessories</b> Cord Reels, R.F. Control, Safety Locks, Radio Charging, Auto Throttle, Open Door Alarms, USB & Ethernet Ports, Touch Switch & Bluetooth	81 - 89
 12	<b>Index</b>	90 - 92

# ZERO EMISSIONS POWER. ANYTIME. ANYWHERE.

## CLEAN, GREEN, EFFICIENT POWER FOR YOUR EMERGENCY VEHICLE.

# FREEDOM<sup>e</sup>GEN

BY MISSION CRITICAL ELECTRONICS

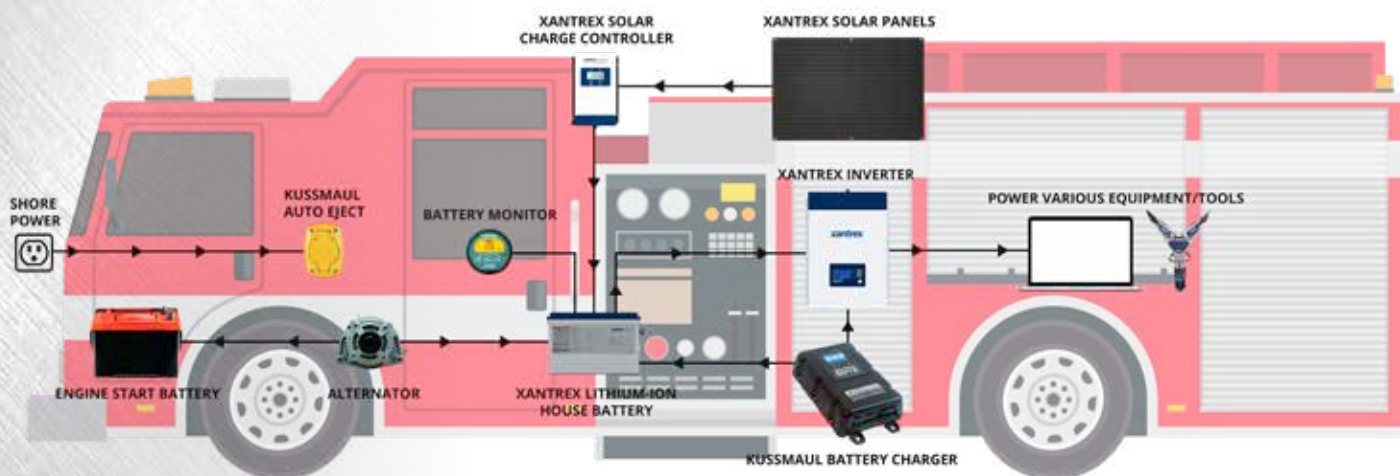

**Clean, quiet, self-contained power system with multiple charging options. Our lithium-ion technology is safe, powerful and efficient with ROI in less than 3 years.**

- The heart of the FREEDOM eGEN system is a dedicated high power density lithium ion battery to run auxiliary tools and critical components.
- The lithium-ion battery pack delivers 6-8X life cycle of traditional batteries.
- The battery pack may be replenished via multiple sources including high output auxiliary alternator, solar, and shore power when plugged in.
- The system may be used in conjunction with a generator but it significantly reduces generator runtime or may eliminate its use altogether.
- System is customizable to the needs of your fleet.




**See how much you could save  
with Freedom eGen and ZeroRPM!**



# ZERO EMISSIONS POWER. ANYTIME. ANYWHERE.

## CLEAN, GREEN, EFFICIENT POWER FOR YOUR EMERGENCY VEHICLE.

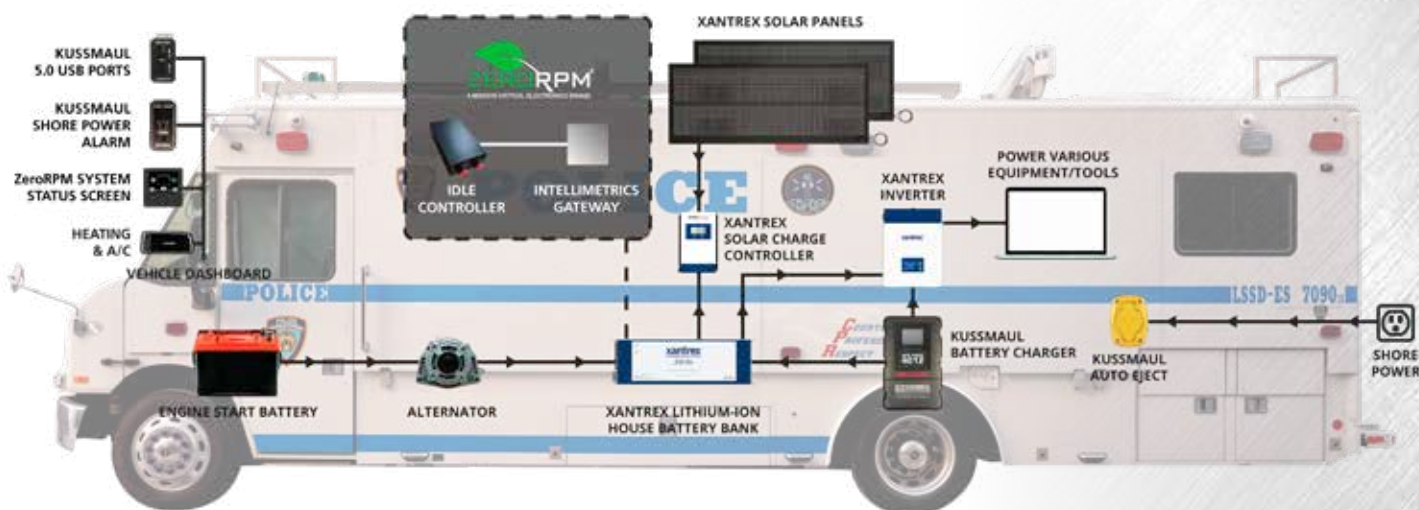

**Transform your vehicle into a hybrid unit and save thousands on fuel and operating costs.**

- Lithium-ion battery powered solution delivers power for climate control, onboard electronics and tools.
- The system integrates with a vehicle's electrical & engine system to provide engine off A/C and heating plus power for all onboard electronics.
- Once the vehicle is in park mode, the system shuts down the engine and provides all required power from lithium-ion battery source.
- For extended stationary use of vehicle, the system manages engine start/stop to recharge batteries as needed.
- System is customizable to the needs of your fleet.

### How Does ZeroRPM® Work?

The ZeroRPM® system integrates seamlessly with a vehicle's engine and existing electrical system. Place your vehicle in park and ZeroRPM® turns off the engine and switches to a Lithium-Ion power system to power all vehicle electronics, including HVAC. Tap the brake and ZeroRPM® starts the engine and switches back to engine power.

The system captures all data utilizing Intellimetrics® software to give users detailed insight into how the system performs. A secure portal provides customized reports and graphs of fuel savings, emissions reduction, and vehicle usage.

**Start recouping your investment on day 1.**

# SECTION 2: BATTERY CHARGERS



Charger  
Selection Guide  
Pages 5-6



Low Profile Charger  
Series  
Pages 7 - 9



Chief Series  
Page 10



Auto Charge  
12 Series  
Page 11



Auto Charge  
1000 PLC  
Page 12



Auto Charge  
20/20  
Page 13



Auto Charge 1200  
Built-In Display  
Page 14



Auto Charge 1200  
Remote Display  
Page 15



Auto Charge  
35/10  
Page 16



Auto Charge  
40/20  
Page 17



EV Charger Series  
Page 18



Auto Charge  
11 Series  
Page 19



Auto Charge  
2000 PLC  
Page 20



Auto Charge 20  
Page 21



LPC 45  
Page 22



Euro Charger  
I and II  
Page 23



Euro Charger III  
Page 24



Battery Saver  
Low Ripple Series  
Page 25

# CHARGER SELECTION GUIDE

SINGLE BATTERY BANK SYSTEMS SELECTION CHART																													
<div><div>Recommended</div><div>OK</div><div>Not Recommended</div></div> <p>Average Battery Ratings</p> <p>CCA: 700</p> <p>Amp Hour: 100</p>																													
			PARASITIC LOADS IN AMPS																										
CHARGER SERIES	AMPS	PAGE	0	5	10	0	5	10	0	5	10	0	5	10	20	0	5	10											
AUTO CHARGE CHIEF SERIES																													
Chief Series 4012	40	10																											
Chief Series 6012	60	10																											
AUTO CHARGE																													
Auto Charge 12	12	11																											
Auto Charge 12HO	20	11																											
Auto Charge 1200	40	14																											
LOW PROFILE																													
LPC 7	7	7																											
LPC 20	20	9																											
LPC 40	40	8																											
LPC 80	80	9																											
EV																													
EV-20	20	18																											
EV-40	40	18																											
AUTO CHARGE - BATTERY SAVER																													
Auto Charge 1000	18	12																											
Auto Charge 20/20	40	13																											
Auto Charge 35/10	45	16																											
Auto Charge 40/20	60	17																											
WATERPROOF																													
WP-35	35																												
PUMP PLUS																													
Pump Plus 1000 PLC	18	51																											
Pump Plus 1200	40	52																											



- Recommended
- OK
- Not Recommended

CCA: 700

Amp Hour: 100



## MAIN BATTERY

## ENGINE BATTERY

### PARASITIC LOADS IN AMPS

## AUTO CHARGE CHIEF SERIES

[illegible]

## AUTO CHARGE

[illegible]

**AUTO CHARGE / BATTERY SAVER**

[illegible]

## EURO

[illegible]

## PUMP PLUS

[illegible]

6 | (800) 346-0857

# LOW PROFILE CHARGER 7

## SINGLE BATTERY BANK

**For Power Sensitive Electronics.  
Low Profile Case Fits in Tight Locations.**

### Features

- 7A for charging a single battery bank
- Three step charging: bulk, absorption, and float
- Lightweight, small low profile size
- Clean output poses no interference with radios and other mobile devices



- Gel Cell/Lead-Acid switch selects the optimum charge/float voltages based on the battery type
- Included Charger Status indicator light changes color according to the output
- Current limiting prevents damage from an overload
- Load activated cooling fan allows for continuous operation at full-rated output
- A Float/3 Step selector switch protects the batteries when charging under a continuous load
- Meets CE requirements
- Includes a heavy duty stainless steel case designed for emergency vehicle use

Part Number	Description	Electrical Data				Dimensions			Wt.
		DC Volts	DC Amps	AC Volts	AC Amps	L	W	H	
445-4290-5	LPC 7	12	7	120 / 240	2.0 / 1.0	8.62"	4.93"	2.47"	3

# LOW PROFILE CHARGER 40

## SINGLE BATTERY BANK WITH PARASITIC LOAD COMPENSATION



**For Power Sensitive Electronics.  
The Low Profile Case Fits in Tight Locations.**

### Features

- Newly enhanced LPC 40A with patented PLC (parasitic load compensation) technology
- Clean output poses no interference with radios and other mobile electronics
- Includes a 15A auxiliary output circuit with a power source selector switch for operating accessory loads i.e., air compressor pumps, handheld lights or handheld radios
- Front panel connections for remote display and auxiliary loads
- Includes a heavy duty aluminum case designed for emergency vehicle use
- User Selectable:
  - Battery Type
  - 3 Step or Float
  - 1, 5 or 10 hour timer
  - PLC

### Remote Display Options



**Bar Graph Display**  
091-200-IND



**Status Center Display  
in Watertight Case**  
For LPC 40: 091-194-IND-WT-XX



**Super Auto Eject  
Deluxe Covers**  
Available  
for this product  
see page 35



**Status Center Display**  
For LPC 40: 091-194-IND


### Color Options

<b>YW</b>	<b>RD</b>	<b>BL</b>
Yellow	Red	Blue
<b>WH</b>	<b>GY</b>	<b>BLK</b>
White	Gray	Black

### Optional Accessory

#### E-Z Slide Mount Plate: 091-200-EZM

For slide-in installation and removal of the LPC 40 or LPC 20 in hard to access areas with minimal vertical clearance

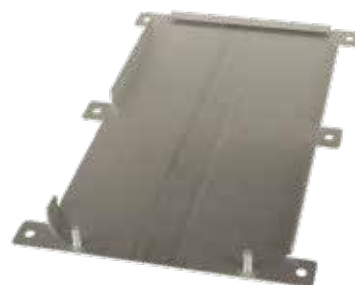

Part Number	Description	Electrical Data				Dimensions			Wt.
		DC Volts	DC Amps	AC Volts	AC Amps	L	W	H	
091-200-12	LPC 40, w/ Bar Graph Display	12	40	120	6.0	13.25"	6.80"	3.30"	7
091-200-12-194	LPC 40, w/ Status Center	12	40	120	6.0	13.25"	6.80"	3.30"	7
091-200-12-194-WT-XX	LPC 40, w/ Watertight Display	12	40	120	6.0	13.25"	6.80"	3.30"	7
091-200-EZM	EZ Slide Mount Plate for LPC 40	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

All units also available in 240 VAC Input, contact the sales department for part number



# LOW PROFILE CHARGER 20 & 80

## SINGLE BATTERY BANK

**Power Sensitive Electronics.**  
**The Low Profile Case Fits in Tight Locations.**

### Features

- 20A and 80A for charging a single battery bank
- Clean output poses no interference with radios and other mobile electronics
- Includes a 15A auxiliary output circuit with power source selector switch for operating accessory loads i.e., air compressor pumps, hand lights or handheld radios
- Front panel connections for remote display and auxiliary loads
- Includes a heavy duty aluminum case designed for emergency vehicle use



LPC 80



LPC 20



### Remote Display Options



**Bar Graph Display**  
 091-200-IND



**Super Auto Eject**  
 Deluxe Covers Available  
 for this product  
 see page 35



**Status Center Display**  
 LPC 20: 091-194B-IND  
 LPC 80: 091-194C-IND



**Status Center Display  
 in Watertight Case**  
 LPC 20: 091-194B-IND  
 LPC-80: 091-194C-IND-WT-XX

Color Options see page 6

Part Number	Description	Electrical Data				Dimensions			Wt.
		DC Volts	DC Amps	AC Volts	AC Amps	L	W	H	
091-206-12	LPC 80, w/ Bar Graph Display	12	80	120	13	13.75"	7.00"	4.09"	10
091-206-12-194C	LPC 80, w/ Status Center	12	80	120	13	13.75"	7.00"	4.09"	10
091-206-12-194C-WT-XX	LPC 80, w/ Watertight Display	12	80	120	13	13.75"	7.00"	4.09"	10
091-207-12	LPC 20, w/ Bar Graph Display	12	20	120	7.0	13.25"	6.80"	3.30"	7
091-207-12-194B	LPC 20 w/ Status Center	12	20	120	7.0	13.25"	6.80"	3.30"	7
091-207-12-194B-WT-XX	LPC 20 w/ Watertight Display	12	20	120	7.0	13.25"	6.80"	3.30"	7
091-200-EZM	EZ Slide Mount Plate for LPC 20 and LPC 40 (see page 6)	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
All units also available in 240 VAC Input, contact the sales department for part number									
24 VDC version available, see Page 22 for details									

# CHIEF SERIES™ - SMART CHARGER

## HIGH POWER SINGLE, DOUBLE, OR TRIPLE BANK CHARGER

With Built-In Touch Display and Communications.



### Features

- Single, Double, or Triple Bank Charger
- Built-In Touch Screen Display
- Dual Battery Type Technology – allows for two dissimilar battery chemistry charging at the same time
- IP32 rated for greater ingress protection
- CAN Bus enabled connectivity
- Parasitic Load Compensation (PLC) – allows for user input of total accessory load amps on the vehicle. This allows the charger to shift the absorption stage set point, so the battery voltage drops to the float voltage when desired current is reached
- Configurable for 3 step or float charging
- Optional Remote Touch Display Available
- Accommodates Flooded, Gelled Electrolyte, AGM, Odyssey®, Lithium Iron Phosphate (LFP), and customized.
- Pump Plus feature included
- Rotating mounting feet.

### Information Screens



### Remote Display Options



Remote Control Panel  
091-266-RCP-BLK



Super Auto Eject  
Deluxe Cover available  
091-55-266-XXX

Part Number	Description	Electrical Data				Dimensions			Wt. Lbs
		DC Volts	DC Amps	AC Volts	AC Amps	L	W	H	
091-266-12-40	Charger with Integrated Display	12	40	120-240	6-3	16.5"	9.0"	3.7"	8.4
091-266-12-40-RCP	Charger with Integrated Display + Remote Control Panel	12	40	120-240	6-3	16.5"	9.0"	3.7"	8.4
091-266-12-60	Charger with Integrated Display	12	60	120-240	9-5	16.5"	9.0"	3.7"	8.4
091-266-12-60-RCP	Charger with Integrated Display + Remote Control Panel	12	60	120-240	9-5	16.5"	9.0"	3.7"	8.4
091-266-RCP-BLK	Remote Control Panel					5.0"	4.2"	0.75"	1.3

# AUTO CHARGE® 12 SERIES

## SINGLE BATTERY BANK

**Provides Power for Onboard Electronics.  
With Front Panel Amp Meter.**

### Features

- 12 and 20A models available for charging a single battery bank
- Automatic operation regulates the output to a single battery bank
- Front panel amp meter indicates the output current (Optional vehicle side mount indicator available)
- Includes a heavy duty aluminum case with a protective front panel and wire strain relief designed for emergency vehicle use
- Auto Charge 12 is UL recognized



Model Shown is  
UL Recognized:  
Auto Charge 12



### Optional Configurations



#### AC Outlet in Front Panel:

15A GFI duplex outlet with circuit breaker protection provides plug-in point for AC accessories (PIM option)



#### Dual Voltage Input:

Selector switch on front panel for 120 or 240V, 50-60 hz input (DV)

### Remote Display Options



**Bar Graph Display**  
Model 12: 091-165-016  
Model 12HO: 091-199-001



**LED Display**  
Model 12:  
091-11-102-12

Part Number	Description	Electrical Data				Dimensions			Wt.
		DC Volts	DC Amps	AC Volts	AC Amps	L	W	H	
091-165-12	Auto Charge 12	12	12	120	2.5	4.50"	5.50"	11.00"	12
091-165-12-DV	Auto Charge 12 DV	12	12	120/240	2.5/1.3	4.50"	5.50"	11.00"	12
091-170-12	Auto Charge 12 HO	12	20	120	4.7	4.25"	6.75"	12.75"	16
091-170-DV-12	Auto Charge 12 HO-DV	12	20	120/240	4.7/2.3	4.25"	6.75"	12.75"	16
091-170-PIM	Auto Charge 12 HO-PIM	12	20	120	4.7	4.25"	6.75"	12.75"	16
091-12PIM	Auto Charge 12 PIM	12	12	120	2.5	4.25"	6.75"	12.75"	12



# AUTO CHARGE® 1000 PLC

## SINGLE BATTERY BANK AT 15 AMPS

**Power Auxiliary Loads with 3 Amp Battery Saver.  
Remote Display Included.**



### Features

- 15A battery charger with a 3A battery saver
- Microprocessor controlled, completely automatic operation regulates the output to a single battery bank
- Precision voltage controller senses the battery voltage, eliminating the need for sense wires
- Programmable Parasitic Load Compensation allows for the user to input the total accessory load on the vehicle (in amps). This allows the charger to shift the absorption stage set point so the battery voltage drops to the float voltage when desired current is reached
- Battery selection switch to select Gel Cell, Lead-Acid, AGM or Odyssey
- Float/3-Step Charge Mode Selection Switches
- Automatic current limit
- Battery Saver On/Off switch is used to bypass the Battery Saver and apply all 18A to charge the battery
- Patented

### Remote Display Options



**Bar Graph Display**  
091-199-001



**Super Auto Eject**  
Deluxe Covers Available  
for this product  
see page 35




**Status Center Display**  
091-194B-IND



**Status Center Display in Watertight Case**  
091-194B-IND-WT-XX  
Color Options see page 6

### Battery Saver Wiring Diagram

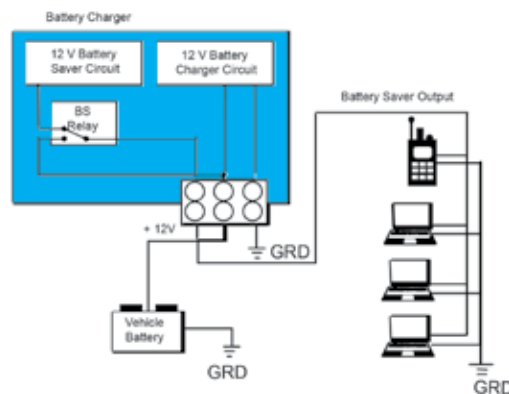

**Battery Saver Operation:** When the battery charger is operating, the vehicle's accessories are powered by the 12V battery saver circuit, internal to the charger. When the charger is powered off, a relay inside the charger switches the vehicle accessories directly to the battery.

Part Number	Description	Electrical Data				Dimensions			Wt.
		DC Volts	DC Amps	AC Volts	AC Amps	L	W	H	
091-215-12	Auto Charge 1000 PLC, w/ Bar Graph Display	12	15 / 3	120	3.5	9.35"	5.90"	4.725"	11
091-215-12-194B	Auto Charge 1000 PLC, w/ Status Center	12	15 / 3	120	3.5	9.35"	5.90"	4.725"	11
091-215-12-194B-WT-XX	Auto Charge 1000 PLC, w/ Watertight Display	12	15 / 3	120	3.5	9.35"	5.90"	4.725"	11

# AUTO CHARGE® 20/20

## SINGLE BATTERY BANK AT 20 AMPS


**Power Auxiliary Loads with 20 Amp Battery Saver.  
Front Panel Amp Meters.**

### Features

- 20A battery charger with a 20A battery saver
- Automatic operation regulates output to a single battery bank
- Separate 20A ATC fuse protected Battery Saver output eliminates any drain on the vehicle battery when in the station
  - Automatically disconnects auxiliary vehicle loads from battery when the charger is energized and powers them from the internal power supply
  - Clean output poses no interference with radios and other mobile devices
  - 20A output with automatic overload current limit
- Dual cooling fans
- Reverse polarity protected
- AC input circuit breaker protection
- Includes a heavy duty aluminum case designed for emergency vehicle use



**Battery Saver Wiring Diagram**

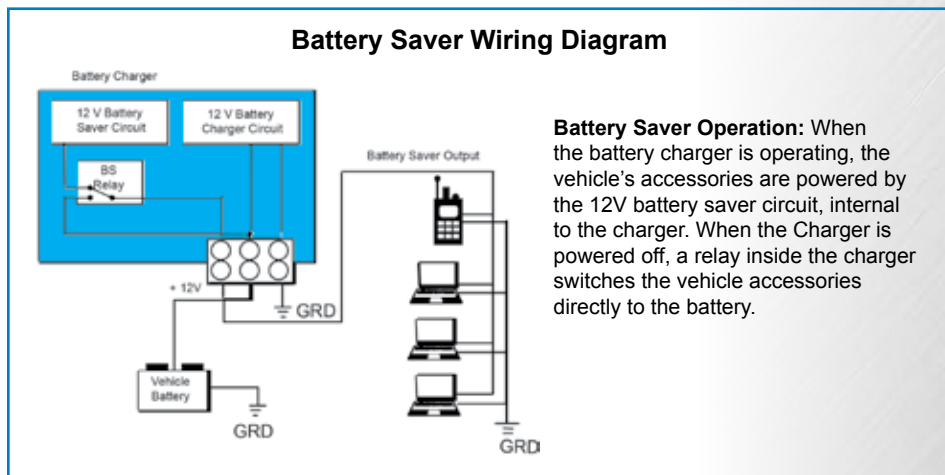

Part Number	Description	Electrical Data				Dimensions			Wt.
		DC Volts	DC Amps	AC Volts	AC Amps	L	W	H	
091-216-20/20	Auto Charge 20/20	12	20 / 20	120	8.5	13.125"	8.250"	5.233"	13

# AUTO CHARGE® 1200 BUILT-IN DISPLAY

## SINGLE BATTERY BANK



**Next Generation Battery Charger With 40 Amps Of Power And Parasitic Load Compensation.**

### Features

- Parasitic Load Compensation (PLC) allows for user input of total accessory load amps on the vehicle. This allows the charger to shift the absorption stage set point so the battery voltage drops to the float voltage when desired current is reached
- Patented PLC Technology
- Low Profile-reduced height and lighter in weight
- Configurable for 3-Step or Float Charging
- Choice of Built-in Display options:
  - Bar Graph or Digital
- Optional Remote Display :
  - Single Bar Graph
  - Auto Charge Status Center
  - Auto Charge Status Center in Watertight Case
  - Super Auto Eject Deluxe Cover with Optional Built-In Display
- Optional E-Z Slide Mounting Plate for slide-in installation and removal of the Auto Charge 1200 charger located in hard to access areas
- Accommodates Lead - Acid, Gelled Electrolyte, AGM and Odyssey® battery types

### Remote Display Options



**Bar Graph Display**  
091-199-001



**Super Auto Eject Deluxe Covers**  
Available for this product  
see page 35



**Status Center Display**  
091-194B-IND



**Status Center Display in Watertight Case**  
091-194B-IND-WT-XX  
Color Options see page 6

### Optional Accessory

#### E-Z Slide Mount Plate: 091-200-EZM

For slide-in installation and removal of the LPC 40 or LPC 20 in hard to access areas with minimal vertical clearance



Part Number	Description	Electrical Data				Dimensions			Wt.
		DC Volts	DC Amps	AC Volts	AC Amps	L	W	H	
091-187-12	Auto Charge 1200	12	40	120	6.0	13.25"	6.80"	3.30"	7
091-187-12-194	Auto Charge 1200 with Status Center	12	40	120	6.0	13.25"	6.80"	3.30"	7
091-200-EZM	EZ Slide Mount Plate	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

All units also available in 240 VAC Input, contact the sales department for part number



# AUTO CHARGE® 1200 REMOTE DISPLAY

## SINGLE BATTERY BANK

**Low Profile Charger with PLC at 40 Amps.**  
**Power Onboard Electronics. Remote Display Included.**

### Features


- Patented Parasitic Load Compensation (PLC), adjustable for 5-35 amperes
- Low Profile-reduced height and lower in weight
- Allows user input of total accessory load amps on vehicle
- Output voltage regulated
- Configurable for 3-Step or Float Charging
- Selectable for 1,5, or 10 hour Safety Timer while in 3-Step mode
- Choice of Remote Display:
  - Single Bar Graph
  - Auto Charge Status Center
  - Auto Charge Status Center in Watertight Case
  - Super Auto Eject Deluxe Cover- #091-55-234-XXX Bar Graph and #091-55-194-XXX Digital Display
- Accommodates Lead-Acid, Gelled Electrolyte, AGM and Odyssey® battery types



### Optional Accessory

#### E-Z Slide Mount Plate: 091-200-EZM

For slide-in installation and removal of the LPC 40 or LPC 20 in hard to access areas with minimal vertical clearance



### Remote Display Options



**Bar Graph Display**  
091-199-001



**Super Auto Eject Deluxe Covers**  
Available for this product  
see page 35



**Status Center Display**  
091-194B-IND



**Status Center Display in Watertight Case**  
091-194B-IND-WT-XX  
Color Options see page 6

Part Number	Description	Electrical Data				Dimensions			Wt.
		DC Volts	DC Amps	AC Volts	AC Amps	L	W	H	
091-187-12-REMOTE	1200 Remote w/ Bar Graph	12	40	120	6	13.25"	6.80"	3.30"	7
091-187-12-R-194	1200 Remote w/ Status Center	12	40	120	6	13.25"	6.80"	3.30"	7
091-187-12-R-194-WT-XX	1200 Remote w/ Watertight S.C.	12	40	120	6	13.25"	6.80"	3.30"	7
091-200-EZM	EZ Slide Mount Plate	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

All units also available in 240 VAC Input, contact the sales department for part number

# AUTO CHARGE® 35/10

## SINGLE BATTERY BANK AT 35 AMPS


**Power Auxiliary Loads with 10 Amp Battery Saver.  
Remote Display Included.**



### Features

- 35A battery charger with a 10A battery saver
- Automatic operation regulates the output to a single battery bank
- A patented built-in sense circuit checks the battery voltage 120 times per second to compensate for a voltage drop in the charging wires providing a quick re-charge and avoiding overcharging
- A separate 10A Battery Saver output eliminates any drain on the vehicle battery when in the station
  - Automatically disconnects any auxiliary vehicle loads from the battery when the charger is energized
  - Ideal for charging handheld lights and portable radios
  - 10A output with automatic overload current limit
  - **Not recommended for powering highly sensitive electronic loads**
- Front panel LED displays AC power applied and Battery Saver circuit overload
- A Remote Bar Graph Display is included
- Includes a heavy duty aluminum case with a protective front panel plate and wire strain relief designed for emergency vehicle use

### Battery Saver Wiring Diagram

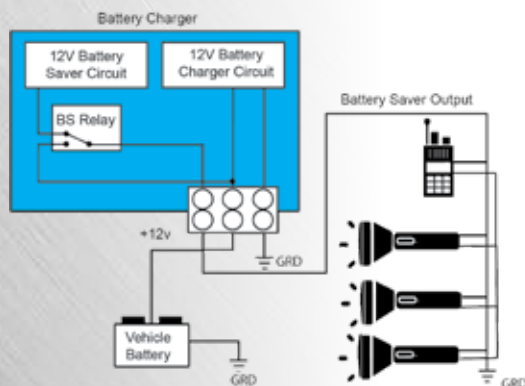

**Battery Saver Operation:** When the battery charger is operating, the vehicle's accessories are powered by the 12V battery saver circuit, internal to the charger. When the charger is powered off, a relay inside the charger switches the vehicle accessories directly to the battery.

### Remote Display Options



**Bar Graph Display**  
091-199-001



**Super Auto Eject  
Deluxe Covers Available  
for this product  
see page 35**

Part Number	Description	Electrical Data				Dimensions			Wt.
		DC Volts	DC Amps	AC Volts	AC Amps	L	W	H	
091-35/10	AC 35/10 w/ Bar Graph Display	12	35	120	10	14.00"	5.50"	5.25"	26

# AUTO CHARGE® 40/20

## SINGLE BATTERY BANK AT 40 AMPS

**Power Auxiliary Loads with 20 Amp Battery Saver.  
Remote Display Included.**

### Features

- 40A battery charger with a 20A battery saver
- Automatic operation regulates the output to a single battery bank
- Separate 20A ATC fuse protected Battery Saver output eliminates any drain on the vehicles battery when in the station
  - Clean output poses no interference with radios and other mobile devices
- Gel Cell, Lead-Acid, and AMG switch selects the optimum charge/float voltages based on the battery type
- 1-hour "boost" voltage for rapid battery recovery
- Automatic current limit
- Reverse polarity protected
- AC input circuit breaker protection



### Remote Display Options



**Bar Graph Display**  
091-200-001



**Status Center Display  
in Watertight Case**  
091-194-IND-WT-XX




**Super Auto Eject  
Deluxe Covers Available  
for this product  
see page 35**



**Status Center Display**  
091-194-IND

### Color Options



Part Number	Description	Electrical Data				Dimensions			Wt.
		DC Volts	DC Amps	AC Volts	AC Amps	L	W	H	
091-216-40/20	Auto Charge 40/20 w/ Bar Graph Display	12	40 / 20	120	8.5	13.25"	7.13"	5.25"	13
091-216-40/20-194	Auto Charge 40/20 w/ Status Center	12	40 / 20	120	8.5	13.25"	7.13"	5.25"	13
091-216-40/20-194-WT-XX	Auto Charge 40/20 w/ Watertight Display	12	40 / 20	120	8.5	13.25"	7.13"	5.25"	13



# EV CHARGER SERIES

## SINGLE BATTERY BANK



EV 20



EV 40

**Auxiliary Output for Electronics.  
Low Profile Design.**


### Features

- 20 and 40A models available for charging a single battery bank
- Low profile design saves valuable space in compartments and/or under the seat
- Clean output poses no interference with radios and other mobile electronics
- A 15A auxiliary output circuit with a power source selector switch for operating accessory loads i.e., air compressor pumps, handheld lights or handheld radios
- Heavy duty terminal block for secure connections
- Durable powder coat finish
- Available as a kit with a remote battery meter
- Includes a heavy duty aluminum case designed for emergency vehicle use
- An optional mounting plate features slide-in and lock design for easy installation/removal under seats and other hard to access locations

### Optional Accessories

#### Remote Bar Graph Display: 023-5353-1

- Charger "On" LED
- Bar graph battery condition
- Operates when charger is not powered

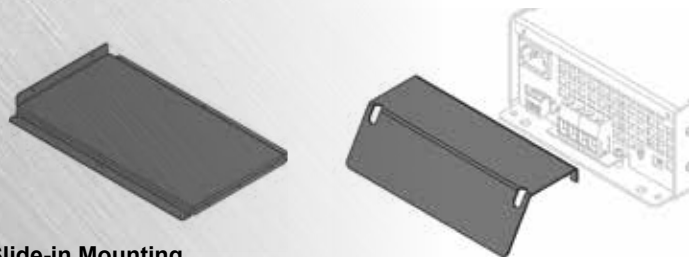

#### Slide-in Mounting Plate Assembly: 444-5279-0

Easy installation under seats  
and hard to access locations

#### Kick Plate: 444-5280-0

Protects front panel connections

### EV-20 Features

- 20A rating with a clean output - no electronic interference
- 2 step charging: bulk, float, no overcharging
- Operates on 120V
- Lowest profile design, only 2.32" high

### EV-40 Features

- Fast 3 step charging: Produces up to 40A output to quickly replenish batteries, then switches to lower float voltage maintenance mode to avoid overcharging
- Includes a battery type selector switch to program use with Gel Cell/Flooded Lead Acid/AGM batteries
- Operates on 90-250V input, auto range

Part Number	Description	Electrical Data				Dimensions			Wt.
		DC Volts	DC Amps	AC Volts	AC Amps	L	W	H	
445-5393-0	EV-20, Charger	12	20	120/240	3.1	13.12"	6.80"	2.32"	5
445-5399-0	EV-20, Charger & Display	12	20	120/240	3.1	13.12"	6.80"	2.32"	5
445-5262-0	EV-40, Charger	12	40	120/240	6.2	13.12"	6.80"	3.13"	7
445-5265-0	EV-40, Charger & Single Display	12	40	120/240	6.2	13.12"	6.80"	3.13"	8
445-5264-0	EV-40, Charger & Dual Display	12	40	120/240	6.2	13.12"	6.80"	3.13"	9
444-5279-0	Mounting Plate -- EV20/40	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
444-5280-0	Kick Plate Guard -- EV20/40	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

# AUTO CHARGE® 11 SERIES

## DUAL BATTERY BANKS

**Power for Onboard Electronics.  
Front Panel Amp Meter.**

### Features

- 10 and 20A models are available
- Automatically charges dual battery banks utilizing independent sense circuits that control voltage and current to each battery. Parasitic loads on one battery do not affect the second
- Full amperage output is available to either battery if the adjacent bank does not require charging, optimizing the use of available power when charging banks with differing parasitic load rates
- Front panel amp meter indicates the total output current
- Optional Remote Bar Graph display or LED indicator
- Includes a heavy duty aluminum case with a protective front panel plate and wire strain relief designed for emergency vehicle use
- Model 11, UL recognized



10



11 HO

### Optional Configurations



#### AC Outlet in Front Panel:

15A GFI duplex outlet with circuit breaker protection provides plug-in point for AC accessories (PIM option)



#### Dual Voltage Input:

Selector switch on front panel for 120 or 240V, 50-60 hz input (DV)

Model Shown is UL Recognized:  
Auto Charge 11

### Remote Display Options



**Dual Bar Graph Display**  
091-11-127



**LED Display**  
091-11-102-12

Part Number	Description	Electrical Data				Dimensions			Wt.
		DC Volts	DC Amps	AC Volts	AC Amps	L	W	H	
091-11-12	Auto Charge 11	12	10	120	2.5	4.375"	5.50"	11.375"	12
091-11DV-12	Auto Charge 11 DV	12	10	120/240	2.5/1.3	4.375"	5.50"	11.375"	12
091-11HO-12	Auto Charge 11 HO	12	20	120	4.7	4.25"	6.75"	12.75"	19
091-11HO-DV-12	Auto Charge 11 HO-DV	12	20	120/240	4.7/2.4	4.25"	6.75"	12.75"	19
091-11HO-PIM	Auto Charge 11 HO-PIM	12	20	120	4.7	4.25"	6.75"	12.75"	19
091-11PIM	Auto Charge 11 PIM	12	10	120	2.5	4.25"	6.75"	12.75"	12

# AUTO CHARGE® 2000 PLC

## DUAL BATTERY BANKS AT 15AMPS

**Power Auxiliary Loads with 3 Amp Battery Saver.  
Remote Display Included.**

### Features

- 15A charger with a 3A battery saver
- Automatically charges dual battery banks utilizing independent sense circuits that control the voltage and current to each battery. Parasitic loads on one battery do not affect the second
- Precision voltage controller senses the battery voltage which eliminates the need for sense wires
- Full amperage output is available to either battery bank if the adjacent bank does not require charging, optimizing the use of available power when charging banks with differing parasitic load rates
- Programmable Parasitic Load Compensation allows for the user to input the total accessory load on the vehicle (in amps). This allows the charger to shift the absorption stage set point so the battery voltage drops to the float voltage when the desired current is reached
- Separate 3A Battery Saver output eliminates any drain from auxiliary loads on the vehicle battery when in the station
  - Automatically disconnects auxiliary vehicle loads from the battery when the charger is energized and powers them from the internal power supply
- Includes a heavy duty aluminum case designed for emergency vehicle use



**Remote Bar Graph Display  
Included: 091-39-IND**

- Provides state-of-charge status when in the station
- Indicates charger "On" and operating


### Remote Display Option



**Super Auto Eject Deluxe Cover with Bar Graph Display and Dual LED Indicator available for this product.**

**See page 35**

### Battery Saver Wiring Diagram

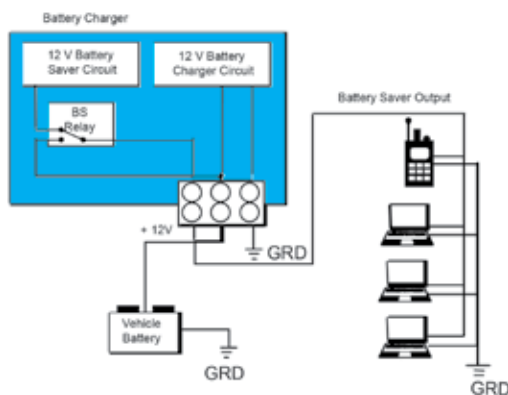

**Battery Saver Operation:** When the battery charger is operating, the vehicle's accessories are powered by the 12V battery saver circuit, internal to the charger. When the charger is powered off, a relay inside the charger switches the vehicle accessories directly to the battery.

Part Number	Description	Electrical Data				Dimensions			Wt.
		DC Volts	DC Amps	AC Volts	AC Amps	L	W	H	
091-237-12	AC 2000 PLC, w/ Dual Bar Graph	12	15 / 3	120	3.5	9.35"	5.90"	4.725"	17



# AUTO CHARGE® 20

## TRIPLE BATTERY BANKS AT 20 AMPS

**Power Onboard Electronics.  
Front Panel Amp Meter.**

### Features

- 20A for charging three battery banks
- Automatically charges three battery banks utilizing independent sense circuits that control the voltage and current to each battery. Parasitic loads on one battery do not affect the others
- Full amperage output is available to any battery if the adjacent banks do not require charging, optimizing the use of available power in charging banks with differing parasitic load rates
- Front panel amp meter indicates total output current
- Optional remote display
- Includes a heavy duty aluminum case with a protective front panel plate and wire strain relief designed for emergency vehicle use



### Optional Configurations



#### AC Outlet in Front Panel:

15A GFI duplex outlet with circuit breaker protection provides plug-in point for AC accessories (PIM option)



#### Dual Voltage Input:

Selector switch on front panel for 120 or 240V, 50-60 hz input (DV)

### Remote Display Options



**Bar Graph Display**  
091-118-022-12



**LED Display**  
091-11-102-12

Part Number	Description	Electrical Data				Dimensions			Wt.
		DC Volts	DC Amps	AC Volts	AC Amps	L	W	H	
091-10-12	Auto Charge 20	12	20	120	4.7	4.25"	6.75"	12.75"	22
091-10-24	Auto Charge 20, 24 Volt	24	10	120	4.7	4.25"	6.75"	12.75"	22
091-10-DV-12	Auto Charge 20 DV	12	20	120/240	4.7/2.3	4.25"	6.75"	12.75"	22
091-10PIM	Auto Charge 20 PIM	12	20	120	4.7	4.25"	6.75"	12.75"	22

# LOW PROFILE CHARGER LPC 45

## SINGLE BATTERY BANK 24 VOLTS

**Power Sensitive Electronics.**  
**Low Profile Case Fits in Tight Locations.**

### Features

- 45A charger for 24VDC vehicle configurations
- Light weight, small low profile size
- Clean output poses no interference with radios and other mobile devices
- 15A, 24VDC auxiliary output circuit with a power source selector switch for operating accessory loads i.e., air compressor pumps, handheld lights or handheld radios
- Front panel connections for a remote display and auxiliary loads
- Includes a heavy duty aluminum case designed for emergency vehicle use
- Remote battery sensing output to compensate for longer charging cables



### Remote Display Options



**Bar Graph Display**  
091-200-IND



**Status Center Display  
in Watertight Case**  
091-194C-24-IND-WT-XX



**Status Center Display**  
091-194C-24-IND



**Super Auto Eject  
Deluxe Covers Available  
for this product  
see page 35**

### Color Options

<b>YW</b>	<b>RD</b>	<b>BL</b>
Yellow	Red	Blue
<b>WH</b>	<b>GY</b>	<b>BLK</b>
White	Gray	Black

Part Number	Description	Electrical Data				Dimensions			Wt.
		DC Volts	DC Amps	AC Volts	AC Amps	L	W	H	
091-206-24	LPC 45, w/ Bar Graph Display	24	45	120	13	13.75"	7.00"	4.09"	10
091-206-24-194C	LPC 45, w/ Status Center	24	45	120	13	13.75"	7.00"	4.09"	10
091-206-24-194C-WT-XX	LPC 45, w/ Watertight Display	24	45	120	13	13.75"	7.00"	4.09"	10

12 VDC version available, see Page 7 for details

# EURO CHARGERS

## MULTIPLE BATTERY BANKS



**Charge Single or Dual Battery Banks**  
**120/240V Source Front Panel Amp Meter**

### Features

- 12 and 40A models available
- Wide variety of input/output options to meet various international applications
- Automatically charges battery banks utilizing independent sense circuits that control the voltage and current to each battery. Parasitic loads on one battery do not affect the others
- Automatically charges and supports parasitic DC loads: data terminals, radios, hand lights, etc. assuring battery is ready for vehicle start
- Full amperage output is available to any battery if the adjacent banks do not require charging
- Front panel amp meter indicates the total output
- Optional LED or Bar Graph Remote Displays available
- 120/240V operation
- Meets CE requirements
- Includes a heavy duty aluminum case with a protective front panel plate and wire strain relief designed for emergency vehicle use

### Remote Display Options



**Single Bar Graph Display**  
**091-94-12E**  
**For Euro Charger I & I VHO**



**LED Display**  
**091-90-012-12**  
**For All Models**



**Dual Bar Graph Display**  
**091-11-127-12**  
**For Euro Charger II & II VHO**

Part Number	Description	Electrical Data				Dimensions			Wt.
		DC Volts	DC Amps	AC Volts	AC Amps	L	W	H	
091-90-12	Euro Charger I	12	12	120/240	2.6/1.3	4.375"	5.50"	11.375"	12
091-90-24	Euro Charger I, 24 Volt	24	6	120/240	2.6/1.3	4.375"	5.50"	11.375"	12
091-162-12	Euro Charger I VHO	12	40	120/240	10/5	9.25"	9.375"	14.00"	33
091-162-24	Euro Charger I VHO, 24 Volt	24	20	120/240	10/5	9.25"	9.375"	14.00"	33
091-117-12	Euro Charger II	12	12	120/240	2.6/1.3	4.375"	5.50"	11.375"	17
091-117-24	Euro Charger II, 24 Volt	24	6	120/240	2.6/1.3	4.375"	5.50"	11.375"	17
091-143-12	Euro Charger II VHO	12	40	120/240	10/5	9.25"	9.375"	14.00"	39
091-143-24	Euro Charger II VHO, 24 Volt	24	20	120/240	10/5	9.25"	9.375"	14.00"	39



# EURO CHARGER

## TRIPLE BATTERY BANKS

Euro Charger Powers Triple Battery Banks.



### Features

- 9 and 18A models available
- Wide variety of input/output options to meet various international applications
- Automatically charges battery banks utilizing independent sense circuits that control the voltage and current to each battery. Parasitic loads on one battery do not affect the others
- Automatically charges and supports parasitic DC loads: data terminals, radios, hand lights, etc. assuring battery is ready for vehicle start
- Full amperage output is available to any battery if the adjacent banks do not require charging
- Front panel amp meter indicates the total output
- Optional LED or Bar Graph Remote Displays available
- 120/240V operation
- Meets CE requirements
- Includes a heavy duty aluminum case with a protective front panel plate and wire strain relief designed for emergency vehicle use

### Remote Display Options



**Triple Bar Graph Display**  
091-118-022-12  
For Euro Charger III



**LED Display**  
091-90-012-12  
For All Models

Part Number	Description	Electrical Data				Dimensions			Wt.
		DC Volts	DC Amps	AC Volts	AC Amps	L	W	H	
091-118-12	Euro Charger III	12	18	120/240	4.7/2.4	4.25"	6.75"	12.75"	19
091-118-24	Euro Charger III, 24 Volt	24	9	120/240	4.7/2.4	4.25"	6.75"	12.75"	19

# BATTERY SAVER®

## LOW RIPPLE SERIES



Battery Saver Low Ripple, HO




Battery Saver LR 40, VHO

**Automatically Power Onboard Computers and MDT's.**  
**When AC Line is Applied to Truck it Preserves Vehicle Battery.**

### Features

- 20A and 40A, 12V battery saver
- Relay removes auxiliary loads from the vehicle battery and connects to the battery saver preventing the battery from discharging when it's in the station
- Clean, low ripple output causes no interference with sensitive electronics
- Fast acting relay ensures "glitch" free power transfer
- Current limiting prevents an overload
- Factory set to 13.2V
- Front panel "Power On" indicator
- Designed for rigors of emergency vehicle use; heavy duty case and components
- USB Model Only:
  - Front panel USB interface is used for recharging electronic devices i.e., iPhone
  - 5.0V, 1A USB Output

### Battery Saver Wiring Diagram

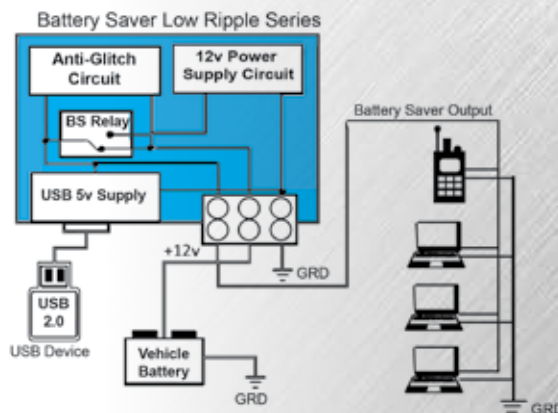

**Battery Saver Operation:** When the battery charger is operating, the vehicle's accessories are powered by the 12V battery saver circuit, internal to the charger. When the charger is powered off, a relay inside the charger switches the vehicle accessories directly to the battery.

Part Number	Description	Electrical Data				Dimensions			Wt.
		DC Volts	DC Amps	AC Volts	AC Amps	L	W	H	
091-295-12	Battery Saver Low Ripple HO	12	20	120	4.5	2.50"	5.50"	13.625"	5
091-256-12	Battery Saver Low Ripple, VHO	12	40	120	4.5	2.50"	5.50"	13.00"	5

# SECTION 3: INDICATORS / METERS



Engine Monitor  
VOTT  
Page 27



Generator Monitor  
VAAFH  
Page 27



Status Center Digital  
Display With Bar  
Graph, Watertight  
Page 28



Status Center Digital  
Display With Bar  
Graph, Standard  
Page 28



Status Center  
Digital Display  
Single Battery  
Page 28



Status Center  
Digital Display  
Dual Battery  
Page 28



Auto Pump Status  
Center Digital Display  
PSI Only  
Page 28



Auto Pump Status  
Center Digital Display  
Voltage & PSI  
Page 28



Remote Bar  
Graph Displays  
Single, Dual & Triple  
Page 29



Super Auto Eject  
Deluxe Cover  
Page 30



DC Volts &  
DC Amps Displays  
Page 30



DC Ammeter  
IN-3-XX  
Page 30



LED Display  
IN-4  
Page 30



LED  
Display  
Page 30



Vertical Display  
Mount  
Page 30



Display Panel  
Rear Seal  
Page 30



Digital Auto  
Level  
Page 31



TG-3:  
Temperature  
Display  
Page 31



DCE  
DC Energy Display  
Page 31



DCV  
Voltmeter Display  
Page 31



## Engine Monitor

Digital read out of vital engine data: DC Voltage, Oil Pressure, Temperature, and Tachometer.

Audio and visual alarm for out of limit conditions operates from the J1939 can bus input.

### Features

- Programmable alarm set points for Oil, Temp, Voltage, and RPM
- Internal audio alarm with a remote alarm output signal
- Input signal wire assembly with a waterproof Deutsch connector
- 4"x4" low profile display
- Waterproof meter face
- **New Feature** - User Selectable Baud Rate (50, 125, 250, 500 or 1000k bits)



Part Number	Description	Electrical Data		Dimensions			Wt.
		Input Volts	Input Signal	L	W	H	
023-4400-0	VOTT	9-33V DC	J 1939	4.3"	4.3"	3.5"	2

## Generator/AC System Monitor

Digital read out of vital generator data: AC Voltage, Frequency, Amperage of two 120V legs of 240V circuit, Engine hours.

Audio and visual alarm for out of limit conditions.

### Features

- 4 functions, all display simultaneously on one screen: Volts, (2) Amps, Frequency
- Hour meter displays when the generator is off
- Programmable alarms: HIGH/LOW for Volts/Frequency and HIGH alarm for Amps (2 lines). Alarm modes: Red warning color with a built in 85db audible alarm, with an output signal for an external alarm relay
- User programmable service hour interval settings and notification
- Waterproof meter face



Part Number	Description	Electrical Data			Dimensions			Wt.
		Operating Voltage	Sense Voltage	Max. Power	L	W	H	
023-4500-0	VAAFH	9-33 VDC	120/240 VAC	36 kW	4.3"	4.3"	3.5	2

## Generator AC/DC System Monitor

6 functions, all display simultaneously on one screen: Volts, Amps, Frequency, DC Volts, and DC Amps.

Audio and visual alarm for out of limit conditions.

### Features

- Programmable alarms: HIGH/LOW for AC Volts and Frequency and HIGH alarm for Amps (2 lines). HIGH/LOW for DC Volts and HIGH alarm for DC Amps
- Alarm Modes: Red warning color visual indication, plus built in 85db audible, with output signal for external alarm relay.
- User programmable service hour interval settings and notification
- Waterproof meter face




Part Number	Description	Electrical Data		Dimensions			Wt.
		Input Volts	Input Signal	L	W	H	
091-247	VAAFH AC/DC	9-33V DC	0.100A	4.3"	4.3"	3.5	2

# DIGITAL DISPLAYS

## Status Center Digital Displays With Bar Graph



**091-194X-IND-WT-XX**  
Watertight Heavy Duty Housing, Size: 5.45" x 3.95"



**091-194X-IND**  
Standard Housing, Size: 3.2" x 4.7"

These displays provide digital Voltage and Ampere readouts, a 5 segment bar graph indicating the output current, and 4 LED's showing the battery condition. They are available in two different housings: standard and watertight. The watertight housing is available in multiple colors. This display is compatible with the Auto Charge 1000, Auto Charge 1200, Auto Charge 1200 Remote, LPC 20, LPC 40, LPC 80, Pump Plus 1000 and Pump Plus 1200 battery chargers.

**Color Options:** YW WH RD GY BL BLK  
Yellow White Red Gray Blue Black

## Status Center Digital Displays



**091-189-12** (1 decimal place accuracy)  
**091-189-12-3.5D** (2 decimal place accuracy)  
Single Battery Display, Size: 3.2" x 4.7"



**091-189-2-12** (1 decimal place accuracy)  
**091-189-2-12-3.5D** (2 decimal place accuracy)  
Dual Battery Display, Size: 3.2" x 4.7"

These universal displays are compatible with all vehicles with or without Kussmaul chargers. They display the voltage digitally and indicate the battery condition via LED's. The LED's flash when high or low voltage is sensed. These displays are available in 1 or 2 battery bank models, one or two decimal accuracy, and 12 or 24V systems.

## Auto Pump Status Center Digital Displays



**091-198-12-AP**  
PSI Only, Size: 3.2" x 4.7"



**091-198-12-PP**  
Voltage & PSI, Size: 3.2" x 4.7"


These displays are an air pressure sensor with an indicator that displays in PSI. The "AP" display contains a numerical display for PSI and a bar graph. The "PP" display contains a numerical display, a bar graph for PSI, and a 3.5-digit display for battery voltage. They both work in conjunction with an air pressure sensor. The air pressure sensor port is connected to an air supply to measure and display the PSI. The indicator is designed to be mounted on the exterior of a vehicle so that the PSI condition may be easily viewed.

# REMOTE BAR GRAPH DISPLAYS



**091-94-XX**

This universal single battery bank Voltage display may be installed in any 12/24V system

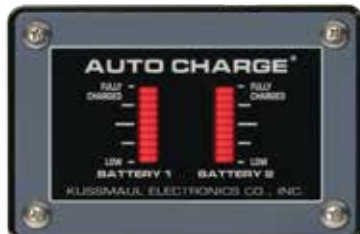

**091-76-XX**

This universal dual battery bank Voltage display may be installed in any 12/24V system (negative ground only)



**091-118-022-XX**

This universal three battery bank Voltage display may be installed in any 12/24V system (negative ground only)



**091-199-001**

This charger specific single battery condition bar graph display is normally supplied with these chargers:

Auto Charge 1000 PLC  
Auto Charge 35/10  
Auto Charge 1200 Remote  
Pump Plus 1000 PLC  
Pump Plus 1200



**091-39-IND**

This charger specific dual bar graph battery condition display is normally supplied with these chargers:

Auto Charge 2000 PLC  
Auto Charge 4000  
Pump Plus 2000 PLC



**091-74-IND**

This charger specific three bank voltage display is normally supplied with: Auto Charge D2



**091-200-IND**

This charger specific single battery condition bar graph display is normally supplied with these chargers:

LPC 20  
LPC 45  
LPC 40  
LPC 80



**091-66-IND**

This charger specific dual bar graph battery condition display is labeled "Vehicle" and "Engine" and is normally supplied with these chargers:

Auto Charge D  
Auto Charge D Pump Plus



**091-234**

This charger specific single battery condition mini bar graph display is an option for the following chargers:

Auto Charge 1000 PLC  
Auto Charge 1200 Remote  
Pump Plus 1000 PLC  
Pump Plus 1200  
Auto Charge 35/10



# ANALOG AND LED DISPLAYS

## Super Auto Eject Deluxe Covers with Battery Charger Indicators



Bar Graph Display  
091-55-234-XXX



Digital Display  
091-55-194X-XXX  
Digital Display for  
AP 2000,3000  
091-55-269-XXX



Bar Graph Display  
with Dual LED  
091-55-239-XXX

Incorporates Auto Eject and Indicator in one product.  
Extreme Duty Cover with Bar Graph or Digital Display compatible with select single Kussmaul battery chargers or Bar Graph Display with Dual LED Indicator for AC2000 and AC4000 battery chargers. For more information see page 40.



IN-4

This display is for the Pump Plus HO Battery Charger/Air Compressor system. It will not operate with other chargers.



IN-3-XX

This indicator can be used with any charger. The neon pilot light indicates when power is applied to the vehicle. A DC ammeter is used to measure the battery chargers output current. Please specify ammeter current (15, 20 or 25) when ordering.



091-11-102-12

The 091-11-102-12 is a remotely mounted LED battery condition display. This display is used with:  
Auto Charge 12  
Auto Charge 12HO  
Auto Charge 11  
Auto Charge 11HO  
Auto Charge 20

## Display Installation Accessories



Vertical Display Mount  
091-91-013

This is an ABS plastic housing designed specifically for any Kussmaul bar graph display. This housing lets you mount your bar graph on the dashboard or anywhere else inside your vehicle. Display sold separately.



Display Panel Rear Seal  
091-39-109

This rubber watertight seal was designed specifically for any Kussmaul bar graph display. This seal protects the rear of the bar graph.



**TG-3:**  
Temperature  
Display  
023-4350-0

## Features

- Sensor range: -20 to 160° F (-29 to 71° C)
- 3 Zone input
- Full-scale LCD Read out accurate within 1% +/-1 degree
- Five level back lighting "On" LED display
- Programmable HIGH/LOW temperature alarm- activates 85db warning alarm
- Programming via instrument front buttons
- Waterproof face fits a standard 2.125" instrument hole
- Includes (1) remote temperature sensor with 20' cable



**DCE: DC Energy Display**  
023-4346-0

Displays Volts, Amps, energy used, and remaining for 12/24V, up to 500A and 3,000A/h capacity. Monitor Voltage on up to three separate banks to monitor:

1. Charge/discharge amperage
2. Total energy: amp-hours or percent-of-charge
3. Alarms: HIGH/LOW voltage and low amp-hours remaining



**DCV: Voltmeter Display**  
023-4348-0

Three battery bank digital read out for 12/24V battery systems. Includes a HIGH/LOW Voltage alarm built-in. Wires directly to the batteries, no charger connection required. Push button selection of battery bank reading.

**Size: 2 1/2" Square Face, 2 1/8" Diameter Mounting Hole, 2 3/8" Rear Meter Projection**



**Auto Level**  
091-251

**Optional:**  
Level Alarm- with High  
Decibel Audible Alarm  
091-260-S (12V)  
091-260-S-24 (24V)

**Auto Level and Level  
Alarm Kits Available  
on Request Please call  
Customer Service**



## Features

- 2 Digit LED-Digital Angle Display
- 8 PCB surface mounted LEDs: Green and Yellow
- One wire zero calibration: can be re-calibrated
- Auto Orientation Detection: vertical or horizontal
- Waterproof: meets IP 64
- Lexan® overlay
- 3 Axis sensor
- Easy connection to 12V or 24V switched power
- Reverse polarity protected
- Two #8 mounting holes
- Optional: Audible Level Alarm
- Includes mounting gasket

# SECTION 4: CORD EJECT SYSTEMS



Auto Eject WP  
Page 33



Dynamic Disconnect  
Page 33



Rear Enclosure  
Page 33



EZ Mounting Plate  
For Auto Eject WP  
Page 33



Super Auto Eject  
Page 34



EZ Mounting Plate  
For Super Auto Eject  
Page 34



Super Trailer Auto  
Eject  
Page 34



Super Auto Eject  
with Deluxe Cover  
Page 35



Super 30 Auto Eject  
Page 36



Super 30 Auto Eject -  
Air / Electric  
Page 37



Super 16 Auto Eject  
Page 38



Air Eject /  
HP Air Eject  
Page 39



Weatherproof  
Adapter Kit  
Page 39



EZ Mounting Plate  
For Air Eject  
Page 39



Auto Clean  
Page 39



Weatherproof Covers  
Page 40



Name Plates  
Page 40



Wire & Wiring Kits  
Page 41



Receptacles  
Page 41



Connectors  
Page 41



WPR-1  
Page 41




# AUTO EJECT WP

Eject Plug from Shore Power on Engine Start.



## Features

- 15/20A AC, or 15A DC receptacle
- Upon sensing the engine starting, the plug ejects from receptacle and away from the vehicle which eliminates cord hazards
- After ejection a weatherproof cover snaps into position over the inlet
- 3.4" rear projection installs in the vehicle side walls with a limited depth clearance
- Available in 6 different colors

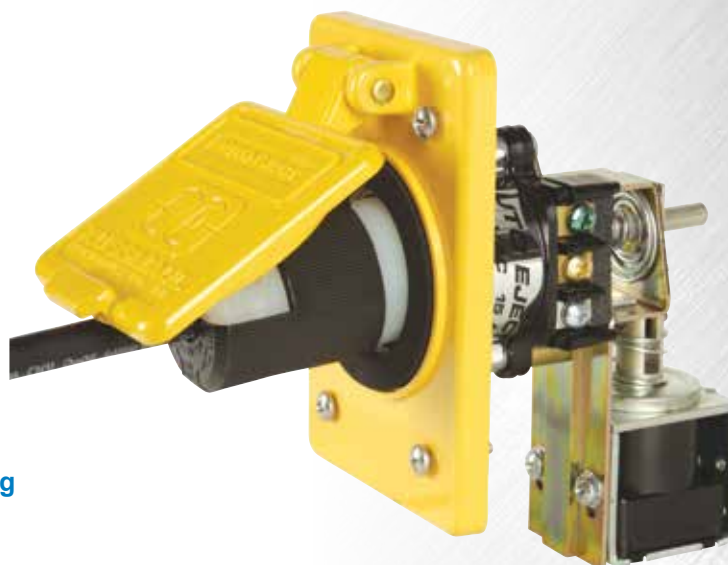

System includes: Auto-Eject, Cover and Plug

## Optional Accessories



**Dynamic Disconnect**  
091-18-098

### Dynamic Disconnect:

Sequences energizing of the Auto Eject which eliminates terminal arcing when connecting and disconnecting to the receptacle



**Rear Enclosure**  
091-18CP

### Rear Enclosure:

For installations that expose the rear of the Auto Eject to outside elements



**EZ Mounting Plate with Power Indicator**  
091-185-010

### EZ Mounting Plate with Power Indicator:

Assemble and pre-wire the Auto Eject in this stainless steel plate, then mount to the vehicle wall. A green indicator light confirms the inlet is energized

### Wiring Accessories:


Retractable Cord, Wiring Kits, and Rubber Plug Protectors (See page 41)



### Weatherproof Cover Color Options

<b>YW</b> Yellow	<b>RD</b> Red
<b>WH</b> White	<b>GY</b> Gray
<b>BL</b> Blue	<b>BLK</b> Black

## Auto Eject WP Dimensions

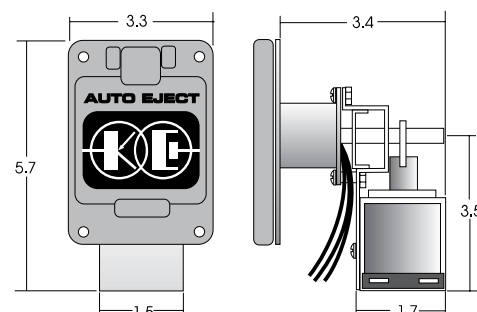

Part Number	Description	Electrical Data				Dimensions			Wt.
		DC Volts	DC Amps	AC Volts	AC Amps	L	W	H	
091-18WP-120	WP Auto Eject	12	N/A	120	15	3.40"	3.30"	5.70"	2
091-20WP-120	WP Auto Eject	12	N/A	120	20	3.40"	3.30"	5.70"	2
091-18WP-012	WP Auto Eject (12V/240V)	12	15	240	15	3.40"	3.30"	5.70"	2

When ordering specify: Cover color code • 24V for 24 volt actuator operation

# SUPER AUTO EJECT



Eject Plug from Shore Power On Engine Start.



## Features

- 15/20A AC, or 15A DC receptacle
- The Super Auto Eject plug ejects from the receptacle and away from vehicle which eliminates cord hazards
- The Super Trailer Auto Eject plugs ejects from the receptacle upon engaging brake pedal prior to vehicle going into gear
- Sequences energizing of the Auto Eject which eliminates terminal arcing when connecting and disconnecting to the receptacle
- After ejection a weatherproof cover snaps into position over the inlet
- A weatherproof back enclosure with a watertight cable fittings protects the mechanism from road contamination
- Pre-wired with a 3' AC cord and an eject sense wire. Entry of the unit is on the side in the standard configuration, a back entry is also available on request.

**System includes: Auto-Eject, Cover, Plug, 3' AC power (pre-wired) and an Eject Sense Wire**

## Optional Accessories

### EZ Mounting Plate with Power Indicator:

Assemble and pre-wire the Auto Eject in this stainless steel plate, then mount to the vehicle wall. A green indicator light confirms the inlet is energized.

### Other Accessories:

Retractable Cord, Wiring Kits, and Rubber Plug Protectors (see page 41)

## Optional Configuration




### Back Wire:

For installations with rear rather than side wire orientation, specify BW when ordering



**EZ Mounting Plate with Power Indicator**  
091-185-009

## Super Auto Eject Dimensions

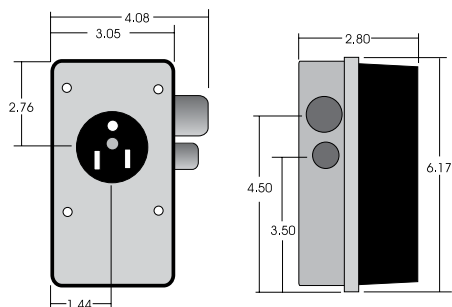

Part Number	Description	Electrical Data				Dimensions			Wt.
		DC Volts	DC Amps	AC Volts	AC Amps	L	W	H	
091-55-15-120	Super 15 Auto Eject	12	N/A	120	15	2.80"	4.08"	6.17"	4
091-55-20-120	Super 20 Auto Eject	12	N/A	120	20	2.80"	4.08"	6.17"	4
091-55-15-DC	Super 15 Auto Eject - DC	12	15	240	15	2.80"	4.08"	6.17"	4
091-55-15-120T	Super 15 Trailer Eject	12	N/A	120	15	2.80"	4.08"	6.17"	4
091-55-20-120T	Super 20 Trailer Eject	12	N/A	120	15	2.80"	4.08"	6.17"	4
091-55-15-DCT	Super Trailer 15 Eject - DC	12	15	240	15	2.80"	4.08"	6.17"	4

When ordering specify: Cover color code • BW for back wire option • 24V for 24 volt actuator operation

# SUPER AUTO EJECT WITH DELUXE COVER

Auto Eject and Charger Status In One Product.



## Features

- 15/20A AC, or 15A DC receptacle
- Auto Eject- senses the engine starting, the plug ejects from the receptacle and away from vehicle which eliminates cord hazards
- Indicator displays the battery charger status
- Deluxe Lid opens 180 degrees
- Works with Kussmaul Battery Chargers CALL FOR MORE INFORMATION
- Sequences energizing of the Auto Eject which eliminates terminal arcing when connecting and disconnecting to the receptacle
- A sealed weatherproof rubber gasket protects the mechanism from road contamination



### Bar Graph Display

has 10 RED LED bars

### Digital Display

Has 3 digit numerical GREEN LED display for amps and voltage

- Works with many Kussmaul single Battery Chargers CALL FOR MORE INFORMATION



### Bar Graph Display with Dual LED Indicator

- Compatible with Kussmaul Dual Battery Chargers, AC2000 and AC4000

**System includes: Auto-Eject, Deluxe Cover, Plug, 3' AC power (prewired) and an Eject Sense Wire**



Bar Graph Display



Digital Display



Bar Graph Display with Dual LED


See page 34 for Color Cover Options, Configurations, Dimensions and Optional Accessories

Part Number	Description	Electrical Data				Dimensions			Wt.	Color
		DC Volts	DC Amps	AC Volts	AC Amps	L	W	H		
61-11-2106	Bar Graph Display, (234)	12	N/A	120	15	2.80"	4.08"	6.17"	4	YW
63-11-2106					20					
63-11-5106	Digital Display (194B) for single battery chargers with output of 20A	12	N/A	120	20	2.80"	4.08"	6.17"	4	YW
61-11-3106	Digital Display (194), for single battery chargers with output of 40A	12	N/A	120	15	2.80"	4.08"	6.17"	4	YW
63-11-3106					20					
61-11-6106	Digital Display (194C), for single battery chargers with output of 80A	12	N/A	120	15	2.80"	4.08"	6.17"	4	YW
63-11-6106					20					
61-11-7106	Digital Display (194E) for AP 1500	12	N/A	120	15	2.80"	4.08"	6.17"	4	YW
63-11-7106					20					
61-11-8106	Bar Graph Display (239), for AC 2000/4000 dual battery chargers	12	N/A	120	15	2.80"	4.08"	6.17"	4	YW
63-11-8106					20					

Contact Sales Department for additional kit configurations and colors



# SUPER 30 AUTO EJECT




Eject 30 Amp Plug from Shore Power On Engine Start.



Weatherproof  
Cover Color Options



## Super 30 Auto Eject Dimensions

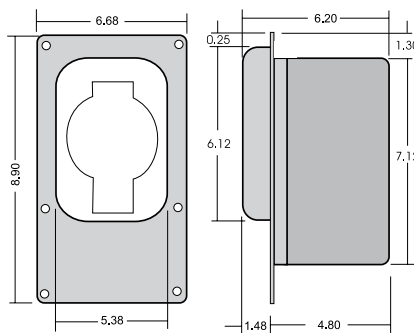

## Features

- 30A, heavy duty pin and sleeve contacts provide a reliable connection over years of insertion/eject cycles
- Three/four pin 120/240V configurations
- Smooth sculpted cover, no sharp edges
- Upon sensing the engine starting, the plug ejects from the receptacle and away from the vehicle which eliminates cord hazards
- Auto Eject energizing is delayed until the detector pin senses the plug is inserted, which eliminates terminal arcing
- After ejection, a weatherproof cover snaps into position over the inlet
- A weatherproof back enclosure with a watertight cable fittings protects the mechanism from road contamination

## System includes: Auto-Eject, Cover and Plug



30A, 120V Plug  
091-159-CON-3P-120



30A, 240V Plug  
091-159-CON-3P-250

## Optional Accessory

### EZ Mounting Plate with Power Indicator:

Assemble and pre-wire the Auto Eject in this stainless steel plate, then mount to the vehicle wall. A green indicator light confirms the inlet is energized.

Model # 091-159-081-120, 120 Vac

Model # 091-159-081-240, 240 Vac



## Optional Configuration

### Back Wire:

For installations with rear rather than side wire orientation, specify BW when ordering



Part Number	Description	Electrical Data				Dimensions			Wt.
		DC Volts	DC Amps	AC Volts	AC Amps	L	W	H	
091-159-30-120	Super 30 Auto Eject - 3 Pin	12 / 24	1.6	120	30	6.20"	6.68"	8.90"	8
091-159-30-250	Super 30 Auto Eject - 3 Pin	12 / 24	1.6	240	30	6.20"	6.68"	8.90"	8
091-159-430-250	Super 30 Auto Eject - 4 Pin	12 / 24	1.6	240	30	6.20"	6.68"	8.90"	8
091-159-430-480	Super 30 Auto Eject - 4 Pin	12/24	1.6	480	30	6.20"	6.68"	8.90"	8

When ordering specify: Cover color code • BW for back wire option

# SUPER 30 AUTO EJECT - AIR / ELECTRIC

Eject 30 Amp Plug from Shore Power & Air Line On Engine Start.



## Features

- 30A, 120V, 175PSI, heavy duty pin and sleeve contacts provide a reliable connection over years of insertion/eject cycles
- Air connection is made through a brass fitting containing a shut-off valve
  - Shut-off valve opens when the plug is inserted to supply air pressure to the vehicle
  - Shut-off valve closes automatically when the plug is ejected, sealing off the air supply air
- Smooth sculpted cover with no sharp edges
- Upon sensing the engine starting, the plug ejects from receptacle and away from vehicle which eliminates cord hazards
- Air-Electric energizing is delayed until the detector pin senses the plug is inserted which eliminates terminal arcing
- A weatherproof back enclosure with watertight cable fittings protects the mechanism from road contamination



## System includes:

**Air/Electric Auto-Eject, Cover, Plug and 30' of Air Line**



**30A, 120V, 175 PSI Plug**  
**091-169-CON-4P-120**



**30A, 240V, 175 PSI Plug**  
**091-169-CON-4P-250**



## Weatherproof Cover Color Options

<b>YW</b> Yellow	<b>RD</b> Red
<b>WH</b> White	<b>GY</b> Gray
<b>BL</b> Blue	<b>BLK</b> Black

## Optional Accessory

### EZ Mounting Plate with Power Indicator:


Assemble and pre-wire the Auto Eject in this stainless steel plate, then mount to the vehicle wall. A green indicator light confirms the inlet is energized.

**Model # 091-159-081-120, 120 Vac**

**Model # 091-159-081-240, 240 Vac**



## Super 30 Auto Eject - Air / Electric Dimensions

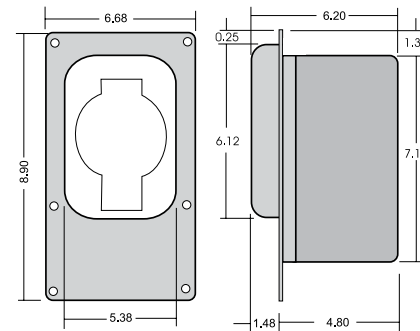

Part Number	Description	Electrical Data					Dimensions			Wt.
		DC Volts	DC Amps	AC Volts	AC Amps	Max PSI	L	W	H	
091-169-30-120	Super 30 Air-Electric Auto Eject	12 / 24	1.6	120	30	175	6.20"	6.68"	8.90"	8
091-169-30-250	Super 30 Air-Electric Auto Eject	12 / 24	1.6	240	30	175	6.20"	6.68"	8.90"	8

When ordering specify: Cover color code

# SUPER 16 AUTO EJECT - EURO STYLE



Eject European Configuration 16 Amp Plug  
From Shore Power On Engine Start.



## Features

- 16A, heavy duty pin and sleeve contacts provide a reliable connection over years of insertion/eject cycles
- Three pin 240V configurations
- IEC 60309 standard European connector is provided
- 12/24V actuation voltages
- Smooth sculpted cover, no sharp edges
- Upon sensing the engine starting, the plug ejects from the receptacle and away from the vehicle which eliminates cord hazards
- Auto Eject energizing is delayed until the detector pin senses the plug is inserted which eliminates terminal arcing
- After ejection, a weatherproof cover snaps into position over the inlet
- A weatherproof back enclosure with a watertight cable fittings protects the mechanism from road contamination



### Weatherproof Cover Color Options


<b>YW</b> Yellow	<b>RD</b> Red
<b>WH</b> White	<b>GY</b> Gray
<b>BL</b> Blue	<b>BLK</b> Black

System includes: Auto-Eject, Cover and Plug



16A, 240V Plug  
091-182-CON-3P-230

### Super 16 Auto Eject Dimensions

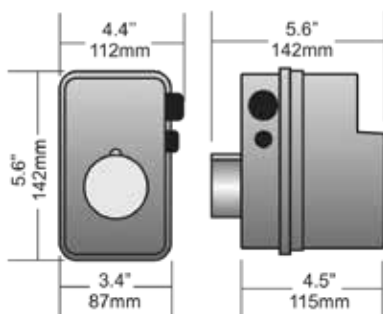

## Optional Accessory

### EZ Mounting Plate with Power Indicator:

Assemble and pre-wire the Auto Eject in this stainless steel plate, then mount to the vehicle wall. A green indicator light confirms the inlet is energized.

Model # 091-182-027-120, 120 Vac

Model # 091-182-027-240, 240 Vac



Part Number	Description	Electrical Data Specs				Dimensions			Wt.
		DC Volts	DC Amps	AC Volts	AC Amps	L	W	H	
091-182-230-12	Super 16 Auto Eject	12	N/A	240	16	5.60"	4.40"	5.60"	5
091-182-230-24	Super 16 Auto Eject (24V)	24	N/A	240	16	5.60"	4.40"	5.60"	5

When ordering specify: Cover color code



# AIR EJECTS

## Eject Air Line From Vehicle Upon Engine Start



### Features

- 140/175 PSI models are available
- Truck side mount pneumatic connector accepts standard air hose adapters to maintain pressure on the vehicles brake system when in the station
- Upon engine start the coupler disconnects and ejects the air line, preventing any hazardous and damaging drive-off situations
- A minimum of 20 PSI required for ejection

### System includes: Air Eject & Mating Connector

### Optional Accessories

#### Weatherproof Adapter Kit:

Recess mounting bracket with weatherproof cover with choice of six color options



**Model #: 091-28AK-XX**

Weatherproof Adapter Kit

#### EZ Mounting Plate with 'Connected' Indicator:

Simplifies installation with an indicator light confirming proper connection

**Model #: 091-185-011**



EZ Mounting Plate with Power Indicator



#### Weatherproof Cover Color Options

<b>YW</b> Yellow	<b>RD</b> Red
<b>WH</b> White	<b>GY</b> Gray
<b>BL</b> Blue	<b>BLK</b> Black

#### Auto Clean:

Paper roll filter element removes any contaminants from the air line.

**Model #: 091-9G-2**



Auto Clean

#### Auto Pump Status Center:

This display is an air pressure sensor with an indicator that displays air pressure in PSI. The display contains a numerical display for PSI and a bar graph. The air pressure sensor port is connected to an air supply to measure and display the PSI. The indicator is designed for exterior mounting so that the PSI condition may be easily viewed outside the vehicle.

**Model #: 091-198-12-AP**



Auto Pump Status Center

Part Number	Description	Electrical Data			Dimensions			Wt.
		DC Volts	DC Amps	Maximum PSI	L	W	H	
091-28	Air Eject	12	N/A	140	1.70"	2.85"	3.60"	2
091-28-24	Air Eject (24V)	24	N/A	140	1.70"	2.85"	3.60"	2
091-28HP	HP Air Eject	12	N/A	175	1.70"	2.85"	3.60"	2
091-28HP-24	HP Air Eject (24V)	24	N/A	175	1.70"	2.85"	3.60"	2

# COVERS AND NAME PLATES

## Super Auto Eject Deluxe Covers

Use with Super 15 & 20 Auto Eject and Air Eject WP Adapter Kit



**091-55-234-XXX**  
Bar Graph



**091-55-239-XXX**  
Bar Graph with  
Dual Output



**091-55-194X-XXX**  
**091-55-269-XXX**  
Digital Display  
Amperage/Voltage

- Extreme duty cover with lid that opens 180°
- Incorporates Auto Eject and Indicator in one product
- Available in Bar Graph or Digital Display
- Works with Kussmaul chargers

Used With	Model	Type of Display
Super 15 & 20 Auto Eject Air Eject WP Adapter Kit	091-55-234-XXX*	Bar Graph Display
Super 15 & 20 Auto Eject Air Eject WP Adapter Kit	091-55-239-XXX*	Bar Graph Display with Dual Output
Super 15 & 20 Auto Eject Air Eject WP Adapter Kit	091-55-194X*-XXX*	Digital Display
Super 15 & 20 Auto Eject Air Eject WP Adapter Kit	091-55-269-XXX	Digital Display for AP 2000, 3000

\*\*Amperage Options for Digital Display -194: 40A, 194A: 15A, 194B: 20A, 194C: 80A (indicate when ordering)

## Standard Weatherproof Covers



**091-3XX**  
Used with:  
WP Auto Eject  
Wiring Kits  
Receptacles



**091-55XX**  
Used with:  
Super 15 & 20  
Auto Eject  
Air Eject WP  
Adapter Kit



**091-182XX**  
Used with:  
Super 16  
Auto Eject



**091-159XX**  
Used with:  
Super 30 Auto  
Eject/AE

### Color Options

<b>YW</b> Yellow	<b>RD</b> Red	<b>BL</b> Blue
<b>WH</b> White	<b>GY</b> Gray	<b>BLK</b> Black

\*Add suffix color code to model # when ordering

Use With	Model
Auto Eject WP	091-3XX*
Super Auto Eject 15, 20	091-55XX*
Super 16 Auto Eject	091-182XX*
Super 30 Auto Eject	091-159XX*

## Nameplates

Self adhesive nameplates fit into recess on Auto Eject Weatherproof covers



**091-3XX**



**091-55XX**

Model	Nameplate	Type of Cover
091-NP-01	Air Eject	091-3XX*
091-NP-02	Air Compressor	091-3XX*
091-NP-03	Battery Charger	091-3XX*
091-NP-04	Block Heater	091-3XX*
091-NP-05	Battery Charger, Block Heater	091-3XX*

Model	Nameplate	Type of Cover
091-NP-06	Battery Charger, Air Compressor	091-3XX*
091-NP-07	Batt. Chgr., Air Comp., B. Heater	091-3XX*
091-NP-Kit	All Nameplates	091-3XX*
091-55NP-Kit	All Nameplates	091-55XX*
091-55NP-01	Air Ejects	091-55XX*
091-55NP-02	Air Compressor	091-55XX*

Model	Nameplate	Type of Cover
091-55NP-03	Battery Charger	091-55XX*
091-55NP-04	Block Heater	091-55XX*
091-55NP-05	Battery Charger, Block Heater	091-55XX*
091-55NP-06	Battery Charger, Air Compressor	091-55XX*
091-55NP-07	Batt. Chgr., Air Comp., B. Heater	091-55XX*



# WIRING ACCESSORIES AND KITS

## Wiring Kits



### Includes:

- 30', 3 conductor wire
- Receptacle & weatherproof cover (Choice of Color)
- Plug

Description		Model
15A AC, 14 AWG		VW-7
20A AC, 12 AWG		VW-9
15A DC, 14 AWG		VW-8



### Includes:

- Male receptacle
- Weatherproof cover (choice of color)
- Plug

Description		Model
15A AC		VW-10
15A AC		VW-12
20A DC		VW-11

## Wiring Accessories



### Includes:

- 30', 3 conductor wire
- Male receptacle

Description		Model
15A, AC, 14AWG		VW-4
20A, AC, 12 AWG		VW-5
15A, DC, 14 AWG		VW-2

## Wire



### Includes:

- 30', 3 conductor wire

Description	Model
15A, AC, 14 AWG	VW-3
20A, AC, 12 AWG	VW-6

## Retractable Cord



Description	Model
15A, 14 AWG, 3 Cond, 20'	091-18D-14
20A, 12 AWG, 3 Cond, 20'	091-18D-12

## Receptacles Connectors



	15A, 120V AC <b>Model 5278C</b>
	20A, 120V AC <b>Model 5378C</b>
	15A, 12V DC <b>Model 5678C</b>



	15A, 120V AC <b>Model 5-15P-H</b>
	20A, 120V AC <b>Model 5-20P-H</b>
	15A, 12V DC <b>Model 6-15P-H</b>

## Connector Protector



Rubber Jacket fits over cord connectors, 1/8" wall thickness, protects against damage when connector drops to floor.

**Model 091-55-069**

## DC Connector



This 3 conductor, 15A, 12V, twist lock connector is moisture resistant and provides a connection that cannot be accidentally interchanged with any of the standard AC connectors. Ideally suited for coupling DC to portable equipment. **Model 091-3-157**

## AC Connector

This kit contains a 120V, 20A power input receptacle, weatherproof cover, plastic water tight enclosure and a liquid tight connector for wire diameter 0.170 minimum to 0.470 maximum.

**Model WPR-1-XX**



(Specify Color)

<b>YW</b> Yellow	<b>WH</b> White	<b>RD</b> Red	<b>GY</b> Gray	<b>BL</b> Blue	<b>BLK</b> Black
---------------------	--------------------	------------------	-------------------	-------------------	---------------------



## SECTION 5: AIR COMPRESSORS



Auto Pump AC  
Page 43



Auto Pump HP  
Page 44



Auto Pump Timers  
Page 45



Vibration Dampening  
Mounting Plates  
Page 45



Auto Clean  
Page 45



Auto Pump Tester  
Page 45



Auto Clean  
Page 45

# AUTO PUMP® AC

## 100 PSI



**Maintains Air Brake System Pressure.**  
**Compensates for System Leaks.**

### Features

- 120V, 4A, AC operation 100 PSI Max Rating
- Vehicle mount compressor ensures the truck's air brake system is properly pressurized for immediate dispatch from the station
- Pressure switch regulated operation automatically senses low pressure in the air system and restores the proper pressure, preventing brake lock-up
- Pressure switch regulated operation
- Factory set PSI actuation points: 75 "ON", 95 "OFF"
- Adjustable, 20 PSI differential, 100 PSI max.
- No interference with an engine mounted air compressor
- Sealed ball bearings for long service life



### Optional Accessories

#### Auto Drain:

Automatically purges the water separator bowl every time the compressor cycles off via a 120 VAC solenoid. It also eliminates the manual draining chore for maintenance personnel. Available as a retrofit accessory or order pre-installed on an Auto Pump.

**Model #: 091-9-089**



#### Auto Pump Timer:

Cycles power to the compressor on a one hour "ON" / "OFF" interval, conserving batteries, allowing the pump to cool, and extending component life. Indicator light activates when Pump is in "OFF" mode.

**Model #: 091-150-115**



#### Auto Pump Status Center:

This display is an air pressure sensor with an indicator that displays air pressure in PSI. The display contains a numerical display for PSI and a bar graph.

The air pressure sensor port is connected to an air supply to measure and display the PSI. The indicator is designed for exterior mounting so that the PSI condition may be easily viewed outside the vehicle.


**Model #: 091-198-12-AP**



#### Vibration Dampening Mounting Plate:

Simplifies the installation and provides vibration dampening shock mounts pressed into the plate at the pumps mounting points.

**Model #: 091-9H-1**

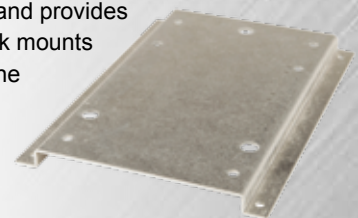

Part Number	Description	Electrical Data				Dimensions			Wt.
		DC Volts	DC Amps	AC Volts	AC Amps	L	W	H	
091-9B-4	Auto Pump AC	N/A	N/A	120	4.2	7.44"	5.31"	7.78"	16
091-9B-4-AD	Auto Pump AC - Auto Drain	N/A	N/A	120	4.2	7.44"	5.31"	7.78"	16
091-9B-4-220	Auto Pump AC (240V)	N/A	N/A	240	2.1	7.44"	5.31"	7.78"	16

# AUTO PUMP® HP

125 PSI



**Maintains Air Brake System Pressure.  
Compensates for System Leaks.**



## Features

- 120V, 3.5A AC operation, (240 Volt model available)  
125 PSI Max Rating
- Vehicle mount compressor ensures the truck's air brake system is properly pressurized for immediate dispatch from the station
- Pressure switch regulated operation automatically senses low pressure in the air system and restores the proper pressure, preventing brake lock-up
- Factory set actuation points: 105 "ON", 125 "OFF"
- Adjustable, 20 PSI differential, 125 PSI max.
- Pressure gauge provides system status
- No interference with an engine mounted air compressor
- Sealed ball bearings for long service life

## Optional Accessories

### Auto Drain:

Automatically purges the water separator bowl every time the compressor cycles off via a 12 VAC solenoid. It also eliminates the manual draining chore for maintenance personnel. Available as a retrofit accessory or an order pre-installed on an Auto Pump.

**Model #: 091-9-090**



### Auto Pump Timer:

Cycles power to the compressor on a one hour "ON" / "OFF" interval, conserving batteries, allowing the pump to cool, and extending component life. Indicator light activates when Pump is in "OFF" mode.

**Model #: 091-150-115**



### Auto Pump Status Center:

This display is an air pressure sensor with an indicator that displays air pressure in PSI. The display contains a numerical display for PSI and a bar graph. The air pressure sensor port is connected to an air supply to measure and display the PSI. The indicator is designed for exterior mounting so that the PSI condition may be easily viewed outside the vehicle.


**Model #: 091-198-12-AP**



### Vibration Dampening Mounting Plate:

Simplifies the installation and provides vibration dampening shock mounts pressed into the plate at the pumps mounting points.

**Model #: 091-9HP-H**



Part Number	Description	Electrical Data Specs				Dimensions			Wt.
		DC Volts	DC Amps	AC Volts	AC Amps	H	W	D	
091-9HP	Auto Pump HP	N/A	N/A	120	3.5	9.25"	7.50"	7.50"	13
091-9HP-AD	Auto Pump HP - Auto Drain	N/A	N/A	120	3.5	9.25"	7.50"	7.50"	13
091-9HP-220	Auto Pump HP (220V)	N/A	N/A	240	1.7	9.25"	7.50"	7.50"	13




# AIR COMPRESSOR ACCESSORIES



**Auto Pump Timer**

Cycles power to the compressor on a one hour "ON"/"OFF" interval, conserving batteries, allowing the pump to cool, and extending component life. Indicator light activates when Pump is in "OFF" mode.



**Vibration Dampening Mounting Plate**

Simplifies the installation and provides vibration dampening shock mounts pressed into the plate at the pumps mounting points.



**Auto Clean, Filter Moisture Separator & Manual Drain**

Micron filter element removes particulates from the line and extracts moisture into a collector bowl with a manual drain valve. Installs in Auto Pump output line 0.25" NPT female.



**Auto Pump Tester**

The Auto Pump Tester is a 0.5 gallon tank with a pressure gauge, bleed valve, and an air line that acts as a reservoir. The unit is for testing Auto Pumps in the field. The system is designed to simulate a vehicle's air system.

## Filter/Moisture Separation With Automatic Drain

These kits contain all the components required for the installation of a water separator AUTO PUMP air compressors. A normally open solenoid valve drains the moisture from the separator collector bowl each time the compressor shuts down. Easily installed on any AUTO PUMP, the AUTO DRAIN assures the filter bowl is always drained and eliminates any manual draining chores for maintenance personnel. The AUTO DRAIN is available as a retrofit component or pre-installed on the AUTO PUMP.



**091-9-131**  
Fits the 091-9-12V  
Auto Pump 12V




**091-9-089**  
Fits the 091-9B-1  
Auto Pump AC



**091-9-090**  
Fits the 091-9HP  
Auto Pump HP

Part Number	Description	Electrical Data				Dimensions			Wt.
		DC Volts	DC Amps	AC Volts	AC Amps	L	W	H	
091-150	Auto Pump Timer (12V DC)	12	N/A	N/A	N/A	N/A	N/A	N/A	0.5
091-150-115	Auto Pump Timer (120V AC)	N/A	N/A	120	N/A	N/A	N/A	N/A	0.5
091-9-12V-HP-H	Mounting Plate - 12V & 12VHP	N/A	N/A	N/A	N/A	N/A	N/A	N/A	0.2
091-9H-1	Mounting Plate - B1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	0.2
091-9HP-H	Mounting Plate - HP	N/A	N/A	N/A	N/A	N/A	N/A	N/A	0.2
091-9G	Auto Clean, 12V	N/A	N/A	N/A	N/A	N/A	N/A	N/A	0.2
091-9G-B1	Auto Clean, B1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	0.2
091-205	Auto Pump Tester	N/A	N/A	N/A	N/A	7.5	7.5	10.0	9.0
091-9-131	Auto-Drain - 12V	12	N/A	N/A	N/A	N/A	N/A	N/A	1.0
091-9-089	Auto-Drain - B1	N/A	N/A	120	N/A	N/A	N/A	N/A	1.0
091-9-090	Auto-Drain - HP	N/A	N/A	120	N/A	N/A	N/A	N/A	1.0


# SECTION 6: KITS AND PACKAGES



Pump Plus 1000 PLC  
Page 47



Pump Plus 1200  
Page 48



Pump Plus 2000  
PLC  
Page 49



Pump Plus HO  
Page 50



Pump Plus,  
Auto Eject Kits  
Page 51



Charger,  
Auto Eject Kits  
Page 52



Charger,  
Auto Pump AC Kits  
Page 53



Charger,  
Auto Pump AC,  
Auto Eject Kits  
Page 54

# PUMP PLUS 1000 PLC SYSTEM

**Package Includes: Air Compressor, Charger with Battery Saver, and Remote Display.**

**System Components Maintain Air Brake Pressure, Batteries, and Power Auxiliary Loads.**

## Features

- This system approach simplifies the complete installation  
Package includes: Pump Plus 1000 PLC with display and a 12V Auto Pump
- 12V, 100 PSI Max, air compressor Auto Pump, see page 43 for specs and page 47 for optional accessories
  - 15A battery charger with a 3A battery saver
    - Microprocessor controlled, completely automatic operation regulates the output to a single battery bank
    - Precision voltage controller senses the battery voltage, eliminating the need for sense wires
    - Programmable Parasitic Load Compensation allows for the user to input the total accessory load on the vehicle (in amps). This allows the charger to shift the absorption stage set point so the battery voltage drops to the float voltage when desired current is reached
    - Battery selection switch to select Gel Cell, Lead-Acid, AGM or Odyssey
    - Float/3-Step Charge Mode Selection Switches
    - Automatic current limit
    - Battery Saver On/Off switch is used to bypass the Battery Saver and apply all 18A to charge the battery
    - Patent pending
    - Choice of Remote Display: Bar Graph, Status Center, or Status Center in a watertight case
    - Air Compressor power mode selector switch
      - DC Powered full time from the vehicle's battery
      - AC Powered only from the battery when the vehicle is plugged into the shore line
      - Automatically shuts off the compressor when disconnected from the shore line, taking the 12A load off the vehicle's battery



## Remote Display Options



**Bar Graph Display**  
091-199-001



**Super Auto Eject**  
Deluxe Covers Available  
for this product  
see page 40



**Status Center Display**  
091-194B-IND



**Status Center Display**  
in Watertight Case  
091-194B-IND-WT-XX  
Color Options see page 6

Part Number	Description
51-21-1100	Pump Plus 1000 PLC System with Bar Graph Display
51-21-3100	Pump Plus 1000 PLC System with Status Center
51-21-410X	Pump Plus 1000 PLC System with Watertight Status Center
091-215-12-PP	Pump Plus 1000 PLC Charger Only
51-21-3200	Pump Plus 1000 PLC Charger Only with Status Center
51-21-420X	Pump Plus 1000 PLC Charger Only with Watertight Status Center



# PUMP PLUS 1200 SYSTEM

Package Includes: Air Compressor, Charger and Remote Display.  
 System Components Maintain Air Brake Pressure, Batteries.



POWER  
18  
AMPS



PSI  
100  
PSI

## Features

- This system approach simplifies the complete installation. Package includes: **Pump Plus 1200** and **12V Auto Pump**
  - 12V, 100 PSI Max, air compressor **Auto Pump**, see page 43 for specs and page 47 for optional accessories
  - 40A **Pump Plus 1200**, single battery output
    - Parasitic Load Compensation (PLC) allows for user input of total accessory load amps on the vehicle. This allows the charger to shift the absorption stage set point so the battery voltage drops to the float voltage when desired current is reached
    - Patented PLC Technology
    - Low Profile - reduced height and lighter in weight
    - Output voltage regulated
    - Accommodates Lead-Acid, Gelled Electrolyte, AGM and Odyssey® battery types
    - Configurable for 3-Step or Float Charging
    - Selectable 1, 5 or 10 hour Safety Timer while in 3-Step mode
    - Adjustable Parasitic Load Compensation (5-35 amperes)
    - Power “ON” LED indicator
    - System Status indicator
    - Internal cooling fan

## Remote Display Options



Bar Graph Display  
091-199-001



Status Center Display  
091-194-IND



Status Center Display  
in Watertight Case  
091-194-IND-WT-XX

### Color Options

<b>YW</b> Yellow	<b>RD</b> Red
<b>WH</b> White	<b>GY</b> Gray
<b>BL</b> Blue	<b>BLK</b> Black



**Super Auto Eject Deluxe Cover with Bar Graph Display**  
available for this product  
see page 40

Part Number	Description
52-21-1100	Pump Plus 1200 System with Bar Graph Display
52-21-3100	Pump Plus 1200 System with Status Center
52-21-410X	Pump Plus 1200 System with Watertight Status Center
091-193-12	Pump Plus 1200 Charger Only
52-21-3200	Pump Plus 1200 Charger Only with Status Center
52-21-420X	Pump Plus 1200 Charger Only with Watertight Status Center
All units available in 240 VAC Input, contact the sales department for part number	

# PUMP PLUS 2000 PLC SYSTEM

**Package Includes: Air Compressor, Charger with Battery Saver and Remote Display.**  
**System Components Maintain Air Brake Pressure, Batteries, & Power Auxiliary Loads.**

## Features

- This system approach simplifies the complete installation  
 Package includes: **Pump Plus 2000 PLC** and **12V Auto Pump**
- 12V, 100 PSI Max, air compressor **Auto Pump**, see page 43 for specs and page 47 for optional accessories
  - 15A battery charger with a 3A battery saver
    - Microprocessor controlled, completely automatic operation regulates the output to a single battery bank
    - Precision voltage controller senses the battery voltage, eliminating the need for sense wires
    - Programmable Parasitic Load Compensation allows for the user to input the total accessory load on the vehicle (in amps). This allows the charger to shift the absorption stage set point so the battery voltage drops to the float voltage when desired current is reached
    - Battery selection switch to select Gel Cell, Lead-Acid, AGM or Odyssey
    - Float/3-Step Charge Mode Selection Switches
    - Automatic current limit
    - Battery Saver On/Off switch is used to bypass the Battery Saver and apply all 18A to charge the battery
    - Patent pending
    - Remote Dual Bar Graph Display is included
    - Air Compressor power mode selector switch
      - DC Powered full time from the vehicle's battery
      - AC Powered only from the battery when the vehicle is plugged into the shore line
      - Automatically shuts off the compressor when disconnected from the shore line, taking the 12A load off the vehicle's battery



**Remote Bar Graph Display**  
**Included: 091-39-IND**

- Provides the state-of-charge status when in the station
- Indicates the charger is "ON" and operating

## Remote Display Option



**Super Auto Eject Deluxe Cover with Bar Graph Display and LED Indicator**  
 available for this product  
 see page 40

Part Number	Description
53-21-1100	Pump Plus 2000 PLC System with Bar Graph Display
091-237-12-PP	Pump Plus 2000 PLC Charger Only



# PUMP PLUS HO SYSTEM

Package Includes: Air Compressor, Charger with Remote Display.  
 System Components Maintain Air Brake Pressure, And Batteries.



POWER  
**18**  
 AMPS

## Features

- This system approach simplifies the complete installation. Package includes: **Pump Plus HO and 12V Auto Pump**
  - 12V, 100 PSI Max, air compressor **Auto Pump**, see page 43 for specs and page 47 for optional accessories
  - 11A charger **Model Pump Plus HO** for charging a dual battery bank
    - Automatic operation regulates the output to dual battery banks
    - A patented built-in sense circuit checks the battery voltage 120 times per second to compensate for a voltage drop in charging wires providing a quick re-charge without overcharging
    - LED Display optional
    - Air Compressor power mode selector switch
      - DC Powered full time from the vehicle's battery
      - AC Powered only from the battery when the vehicle is plugged into the shore line
      - Automatically shuts off the compressor when disconnected from the shore line, taking the 12A load off the vehicle's battery



PSI  
**100**  
 PSI

## Remote Display Option



LED Display  
 IN-4

Part Number	Description
56-21-1100	Pump Plus HO System
091-9C-HO-Charger	Pump Plus HO Charger Only
IN-4	LED Display



# PUMP PLUS - AUTO EJECT KITS


Includes Pump Plus Charger, Display,  
Auto Pump 12V and Auto Eject.  
Pre-Packaged as a Kit for Installer Convenience.  
Simplifies Ordering and Stockroom Handling.



**Call for Kit Part #**  
With Super Auto  
Eject Deluxe  
Cover Option


## Kit Configuration Options

1. Select Pump Plus Charger Model
2. Select Display
3. Select Display Bezel Color
4. Select Auto Pump, with or without Auto Drain
5. Select 15A or 20A Auto Eject
6. Specify Back Wire (BW) (Super Auto Eject Only)
7. Select Cover Option and Color for Auto Eject
8. Contact factory for your particular kit ordering information

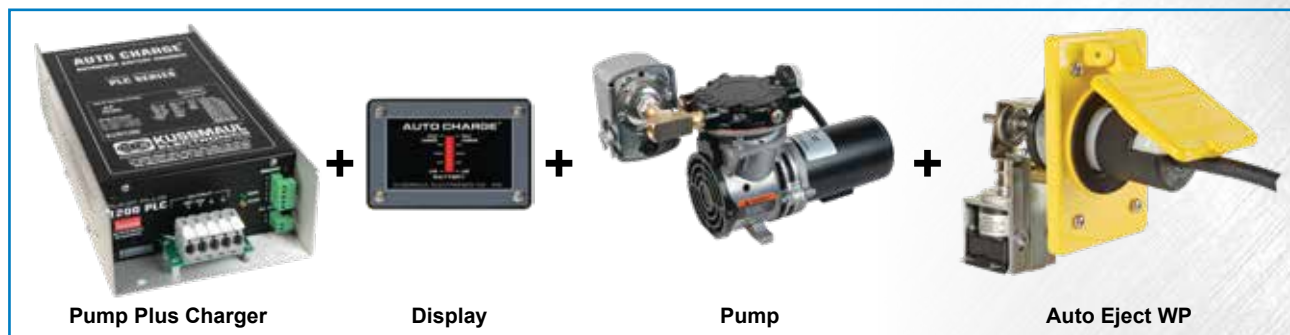

Part Number	Description	Charger	Pump	Display	Auto Eject	Color Cover
53-22-1106	Pump Plus 2000 Kit	Pump Plus 2000 PLC	Auto Pump 12V	Dual Bar Graph	Auto Eject 20WP	Yellow
51-22-1204	Pump Plus 1000 Kit	Pump Plus 1000 PLC	Auto Pump 12V	Single Bar Graph	Auto Eject 15WP	Red
52-22-1105	Pump Plus 1200 Kit	Pump Plus 1200 PLC	Auto Pump 12V	Single Bar Graph	Auto Eject 20WP	White
52-22-4106	Pump Plus 1200 Kit	Pump Plus 1200 PLC	Auto Pump 12V	Watertight Status Center, Blue	Auto Eject 20WP	Yellow

Popular Kits listed, contact factory for all other kit configuration options

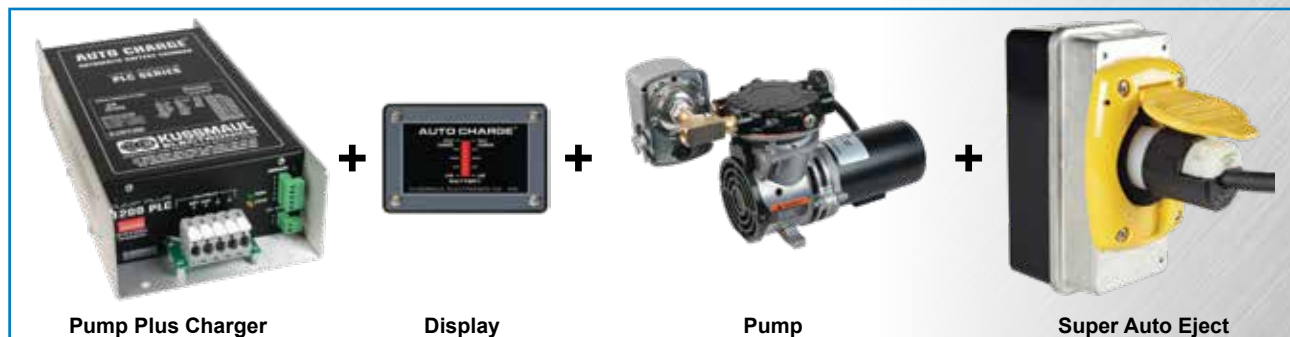

Part Number	Description	Charger	Pump	Display	Auto Eject	Color Cover
53-23-1106	Pump Plus 2000 Super Kit	Pump Plus 2000 PLC	Auto Pump 12V	Dual Bar Graph	Super Auto Eject 20	Yellow
51-23-1204	Pump Plus 1000 Super Kit	Pump Plus 1000 PLC	Auto Pump 12V	Single Bar Graph	Super Auto Eject 15	Red
52-23-1105	Pump Plus 1200 Super Kit	Pump Plus 1200 PLC	Auto Pump 12V	Single Bar Graph	Super Auto Eject 20	White
52-23-4106	Pump Plus 1200 Super Kit	Pump Plus 1200 PLC	Auto Pump 12V	Watertight Status Center, Blue	Super Auto Eject 20	Yellow

Popular Kits listed, contact factory for all other kit configuration options


# CHARGER - AUTO EJECT KITS

**Includes Charger, Display and Auto Eject.**  
**Pre-Packaged as a Kit for Installer Convenience.**  
**Simplifies Ordering and Stockroom Handling.**




## Kit Configuration Options

1. Select Charger Model
2. Select Display
3. Select Display Bezel Color
4. Select 15A or 20A Auto Eject
5. Specify Back Wire (BW) (Super Auto Eject Only)
6. Select Cover Option and Color for Auto Eject
7. Contact factory for your particular kit ordering information

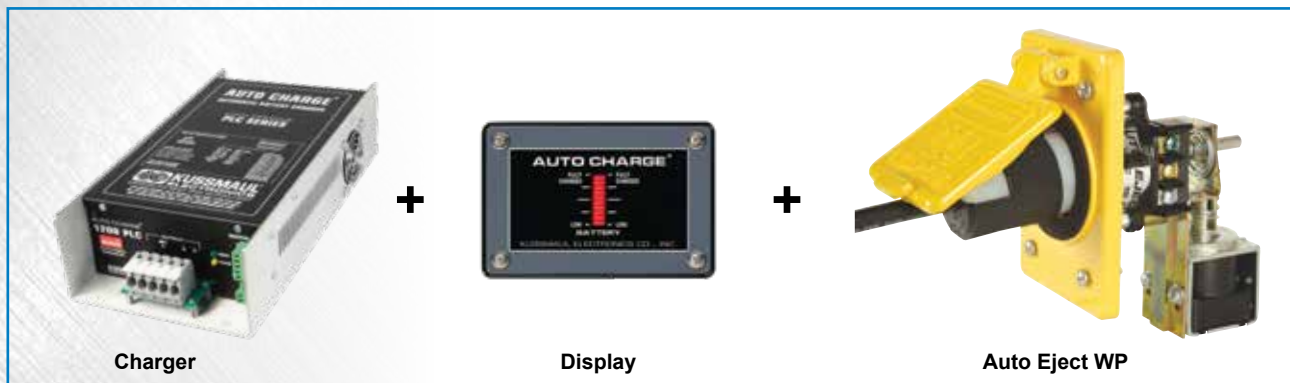

Part Number	Description	Charger	Display	Auto Eject	Color Cover
53-02-1106	Auto Charge 2000 Kit	Auto Charge 2000 PLC	Dual Bar Graph	Auto Eject 20WP	Yellow
51-02-1204	Auto Charge 1000 Kit	Auto Charge 1000 PLC	Single Bar Graph	Auto Eject 15WP	Red
52-02-4106	Auto Charge 1200 Remote Kit	Auto Charge 1200 PLC Remote	Watertight Status Center, Blue	Auto Eject 20WP	Yellow

Popular Kits listed, contact factory for all other kit configuration options

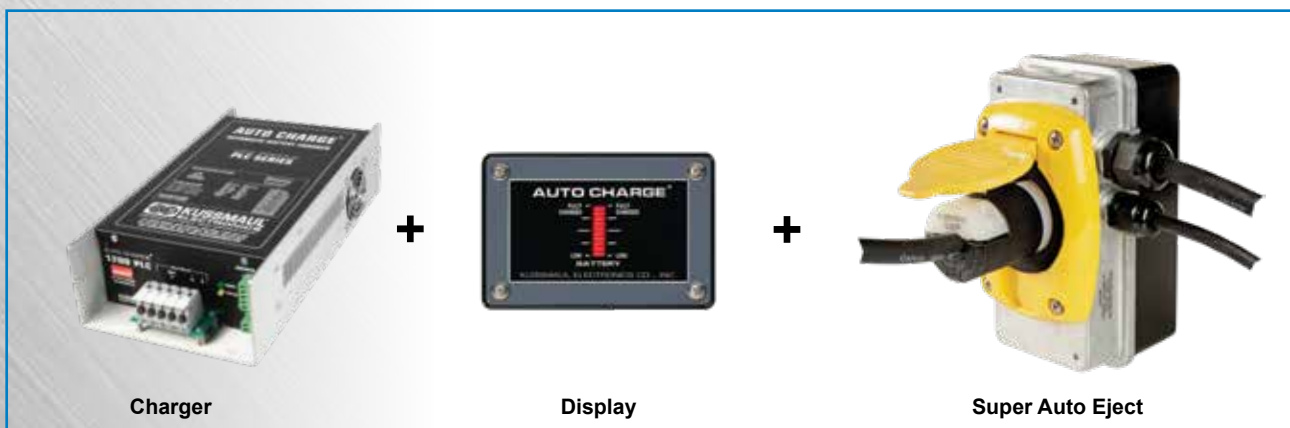

Part Number	Description	Charger	Display	Auto Eject	Color Cover
53-03-1106	Auto Charge 2000 Super Kit	Auto Charge 2000 PLC	Dual Bar Graph	Super Auto Eject 20	Yellow
51-03-1204	Auto Charge 1000 Super Kit	Auto Charge 1000 PLC	Single Bar Graph	Super Auto Eject 15	Red
52-03-4106	Auto Charge 1200 Remote Super Kit	Auto Charge 1200 PLC Remote	Watertight Status Center, Blue	Super Auto Eject 20	Yellow

Popular Kits listed, contact factory for all other kit configuration options

# CHARGER - AUTO PUMP AC

Includes Charger, Display and AC Compressor.  
 Pre-Packaged as a Kit for Installer Convenience.  
 Simplifies Ordering and Stockroom Handling.

## Kit Configuration Options

1. Select Charger Model
 3. Select Display Bezel Color
2. Select Charger Display
 4. Contact factory for your particular kit ordering information



Part Number	Description	Charger	Display	Pump
53-05-1100	Auto Charge 2000 Pump Kit	Auto Charge 2000 PLC	Dual Bar Graph	Auto Pump AC
51-13-1100	Auto Charge 1000 HP Pump Kit	Auto Charge 1000 PLC	Single Bar Graph	Auto Pump HP
52-05-1100	Auto Charge 1200 Remote Pump Kit	Auto Charge 1200 PLC Remote	Single Bar Graph	Auto Pump AC
52-09-4106	Auto Charge 1200 Remote Pump Kit	Auto Charge 1200 PLC Remote	Watertight Status Center, Blue	Auto Pump AC w/Auto Drain

Popular Kits listed, contact factory for all other kit configuration options



# CHARGER - AUTO PUMP AC - AUTO EJECT KITS

Includes Charger, Display,  
AC Compressor and Auto Eject.  
Pre-Packaged as a Kit for Installer Convenience.  
Simplifies Ordering and Stockroom Handling.







**Call for Kit Part #**

With Super Auto  
Eject Deluxe  
Cover Option

## Kit Configuration Options

1. Select Charger Model
2. Select Display
3. Select Display Bezel Color
4. Select Auto Pump, with or without Auto Drain
5. Select 15A or 20A Auto Eject
6. Specify Back Wire (BW) (Super Auto Eject Only)
7. Select Color Cover for Auto Eject
8. Contact factory for your particular kit ordering information

Charger





Display

AC Compressor

Auto Eject WP

Part Number	Description	Charger	Indicator	Pump	Auto Eject	Color Cover
53-06-1106	Auto Charge 2000 Pump WP Kit	Auto Charge 2000 PLC	Dual Bar Graph	Auto Pump AC	Auto Eject 20WP	Yellow
51-14-1204	Auto Charge 1000 HP Pump WP Kit	Auto Charge 1000 PLC	Single Bar Graph	Auto Pump HP	Auto Eject 15WP	Red
52-10-4106	Auto Charge 1200 Remote Pump WP Kit	Auto Charge 1200 PLC Remote	Watertight Status Center, Blue	Auto Pump AC w/Auto Drain	Auto Eject 20WP	Yellow

Popular Kits listed, contact factory for all other kit configuration options

Charger

Display

AC Compressor

Super Auto Eject

Part Number	Description	Charger	Display	Pump	Auto Eject	Color Cover
53-07-1106	Auto Charge 2000 Pump Super Kit	Auto Charge 2000 PLC	Dual Bar Graph	Auto Pump AC	Super Auto Eject 20	Yellow
51-15-1204	Auto Charge 1000 HP Pump Super Kit	Auto Charge 1000 PLC	Single Bar Graph	Auto Pump HP	Super Auto Eject 15	Red
52-11-4106	Auto Charge 1200 Remote Pump Super Kit	Auto Charge 1200 PLC Remote	Watertight Status Center, Blue	Auto Pump AC w/Auto Drain	Super Auto Eject 20	Yellow

Popular Kits listed, contact factory for all other kit configuration options

# SOLAR FLEX & SOLAR MAX FLEX

## Features

- UP to 30 degrees of flexibility
- PERC technology
- 5 busbar technology which provides efficiency and durability
- ETFE Protection, extends the lifespan of the panel compared to non-ETFE panels
- Solar Flex includes a 2 year warranty
- Solar Max Flex includes a 5 year warranty and an adhesive back

## Benefits

- Keep up with vehicle loads without running the engine or plugging in
- Helps comply with anti idle laws
- Saves fuel cost and engine maintenance
- Eliminate the need to jump start reserve vehicles
- Ideal for vehicles with mobile computers and radios

### Complete Heavy Duty Kits Designed for Emergency Vehicle Installation



Charge Controller




MC4-Type Connector




PV & Battery Cables



Mounting Hardware



Waterproof Fitting (now included)

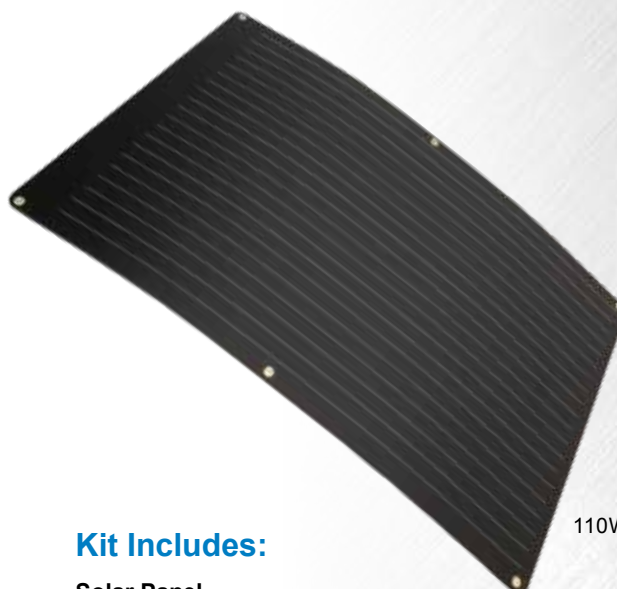

110W

## Kit Includes:

### Solar Panel

- Either a 110W, 220W or 330W solar panel with 5 busbars and PERC (Passivated Emitter and Rear Contact) mono-crystalline cells, a special cell technology that increases module efficiency significantly over standard solar cells.

### Charge Controller

- A 30A Pulse-Width Modulation (PWM) flush mounted charge controller is provided to charge and protect your batteries. Featuring an LCD screen, multi-stage battery charging, charging protections, two USB ports and real-time system indicators.

### PV and Battery Cables

- Weather resistant and certified cables are provided to connect the solar panel to the charge controller and from the charge controller to the battery. The PV cables and battery cables, with a built-in fuse and ring terminals, built-in ferrule terminations for quick connections to the charge controller.

### Mounting Hardware

- Mounting screws, cable clamps and tie wraps are included

### Expansion Kits

- Includes solar panel, mounting hardware and a pair of male and female branch connectors to connect solar panels in parallel.

Part Number	Description	Electrical Data Specs		Dimensions			Wt.
		DC Volts	DC Amps	L	W	H	
781-0100-01	110W Solar Flex Kit	12	5.83	39.2"	26.4"	0.12"	5.5 lbs
781-0100-02	110W Solar Flex Expansion Kit	12	5.7	21.3"	41.8"	0.12"	4 lbs
784-0110-01S	110W Solar Max Flex Slim Kit	12	5.83	73.7"	14.8"	0.12"	6 lbs
784-0110-01	110W Solar Max Flex Kit	12	5.83	39.2"	26.4"	0.12"	5.5 lbs
784-0110-02	110W Solar Max Flex Expansion Kit	12	5.7	21.3"	41.8"	0.12"	4 lbs
784-0220-01	220W Solar Max Flex Kit	12	5.83	39.2"	26.4"	0.12"	5.5 lbs
784-0220-02	220W Solar Max Flex Expand Kit	12	5.7	21.3"	41.8"	0.12"	4 lbs
784-0330-01	330W Solar Max Flex Kit	12	5.83	39.2"	26.4"	0.12"	5.5 lbs
784-0330-02	330W Solar Max Flex Expand Kit	12	5.7	21.3"	41.8"	0.12"	4 lbs
007-2040-0	Waterproof Fitting. See page 84 for more options.						

For more power, visit our website where you will find Solar Max Kits.

# KUSSMAUL SOLAR RIGID



110W or 160W Panel



## Kit Includes:

### Solar Panel

- A 110W solar panel with 5 busbars and PERC (Passivated Emitter and Rear Contact) mono crystalline cells, a special cell technology that increases module efficiency significantly over standard solar cells.

### Charge Controller

- A 30A Pulse-Width Modulation (PWM) flush mounted charge controller is provided to charge and protect your batteries. Featuring an LCD screen, multi-stage battery charging, charging protections, two USB ports and real-time system indicators.

### PV and Battery Cables

- Weather resistant and certified cables are provided to connect the solar panel to the charge controller and from the charge controller to the battery. The PV cables and battery cables, with a built-in fuse and ring terminals, built-in ferrule terminations for quick connections to the charge controller.

### Mounting Hardware

- Mounting brackets, cable clamps and tie wraps are included.

### Expansion Kits

- Includes solar panel, mounting hardware and a pair of male and female branch connectors to connect solar panels in parallel.

## Features

- 15% smaller and lighter compared to other popular brands
- Best in class 18% module efficiency, compared with 100W models of other popular brands
- PERC technology
- 5 year product warranty
- 5 busbar technology which provides efficiency and durability

## Benefits

- Keep up with vehicle loads without running the engine or plugging in
- Helps comply with anti idle laws
- Saves fuel cost and engine maintenance
- Eliminate the need to jump start reserve vehicles
- Ideal for vehicles with mobile computers and radios

### Complete Heavy Duty Kits Designed for Emergency Vehicle Installation



Charge Controller



MC4-Type Connector



Mounting Hardware



PV & Battery Cables



Mounting Brackets



Optional Waterproof Fitting

Part Number	Description	Electrical Data Specs		Dimensions			Wt.
		DC Volts	DC Amps	L	W	H	
780-0100-01	100W Solar Kit	12	5.21	33.1"	26.4"	1.2"	14.99 lbs
780-0160-01	160W Solar Kit	12	8.34	53.2"	26.4"	1.4"	23.15 lbs
780-0100-02	100W Solar Exp Kit	12	5.21	33.1"	26.4"	1.2"	14.99 lbs
780-0160-02	160W Solar Exp Kit	12	8.34	53.2"	26.4"	1.4"	23.15 lbs
007-2040-0	Optional: Waterproof Fitting. See page 84 for more options.						



# SECTION 8: 120/240 VAC EQUIPMENT



Stock Electrical  
Panels  
Page 58



Custom Electrical  
Panels  
Page 59



Auto Interlock II  
Page 60



Auto Interlock III  
Page 60



Auto Interlock IV  
Page 60



Inverters  
Page 61

# STOCK ELECTRICAL PANELS

Specify Amperage Values and Labeling and We'll Assemble to Your Specifications.



**ACCY-IIX**  
AC or DC, 3 Circuits  
5.25" x 3.75"



**ACCY-IX**  
AC or DC, 8 Circuits  
5.25" x 7.50"



**AC-IX**  
AC Master, 5 Circuits  
5.25" x 7.50"



**AC-II**  
AC Master  
5.25" x 3.75"



**ES-4**  
AC Master, 8 Circuits | DC 20 Circuits  
17" x 12"



**ES-5**  
2 AC Load Groups, 10 Circuits  
DC Master, 24 Circuits  
20" x 15"



**ES-6**  
DC Master, 10 Circuits  
3.25" x 15"



**ES-7**  
AC or DC Master, 16 Circuits  
3.25" x 15"



**ES-3**  
AC Master, 6 Circuits | DC 16 Circuits  
13.7" x 10"

Brand Conversion From NEWMAR

# CUSTOM ELECTRICAL PANELS







Electrical Panels to Match Your Precise Requirements.

Send Us Your Sketch, and We'll Do the Rest

CAD Drawings for Approval - Quick Delivery of Finished Product.

We make it easy for you, assisting layout and component selection:

1. UL listed components
2. Any size/shape panel face
3. Totally custom graphics, lettering, logos or language
4. Circuit breakers/switches/fuses
5. Indicator lights, audio alarms
6. Digital or analog meters/instrumentation
7. AC-DC
8. Back lighting
9. Fully assembled, partially loaded or panel blank
10. Pre-wired, ready for installation

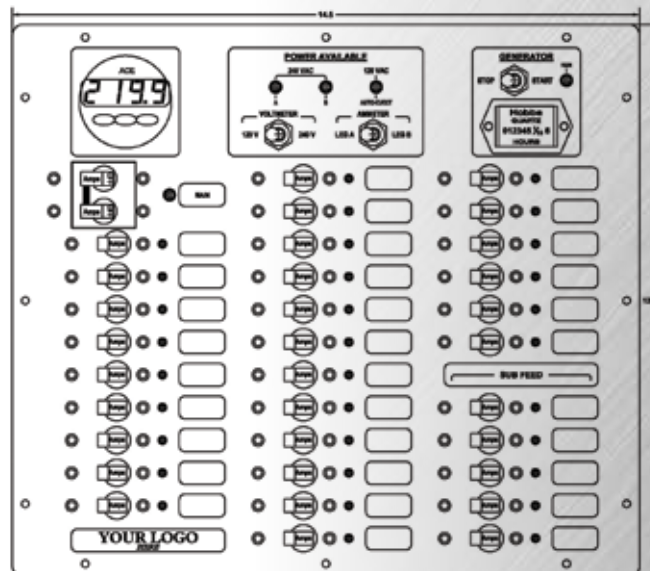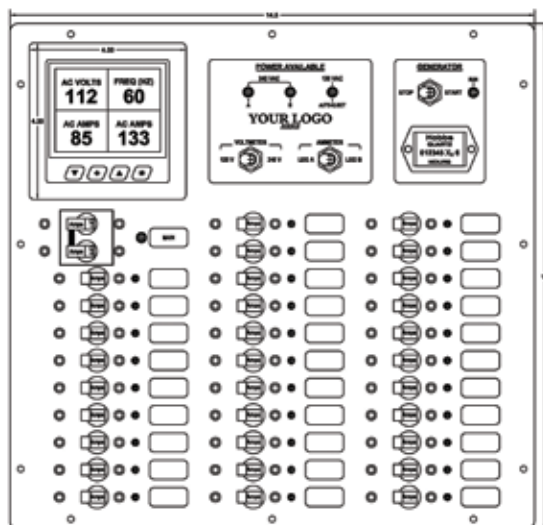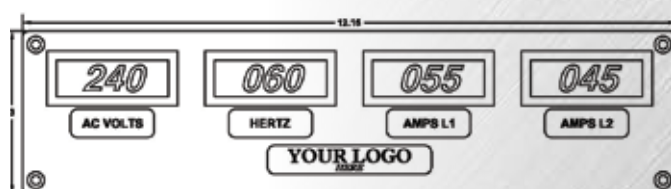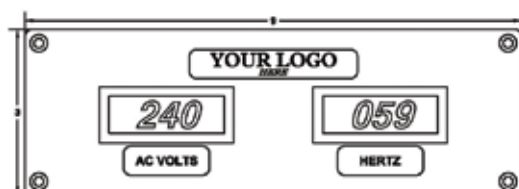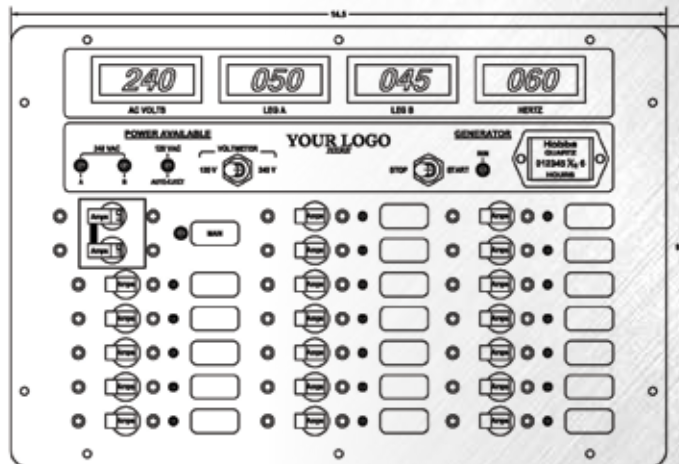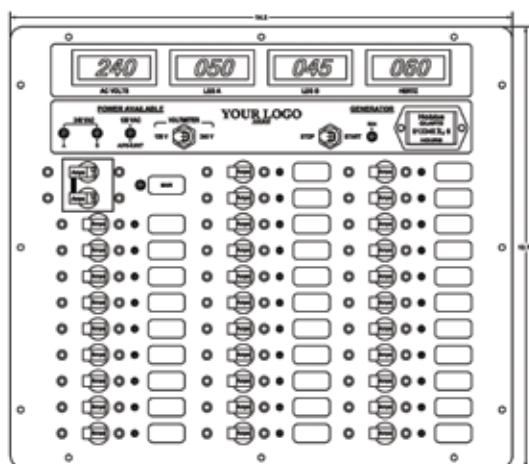




# POWER TRANSFER SWITCH

**Transfer Load from Shore Power to Generator.  
Automatic Operation.**

## Auto Interlock II

### Features

- 20A, double pole relay
- Rapid relay transfer time
- Hard wire installation
- Indicator lights activate to identify the transfer switch position source (shore line or generator)
- Available for 120V and 240V operation
- Steel powder coated case

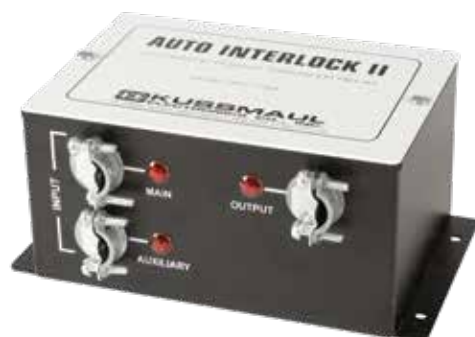

Part Number	Description	Electrical Data	Dimensions			Wt.
		AC Volts	L	W	H	
091-134	Auto Interlock II	120V	4.5"	7.0"	3.5"	2
091-134-230	Auto Interlock II	240V	4.5"	7.0"	3.5"	2

## Auto Interlock III

### Features

- 15A outlet
- Rapid relay transfer time
- Easy plug-in installation includes generator and shore input cables with molded plugs
- Indicator lights activate to identify transfer switch position source (shore line or generator)
- 120V operation
- PVC case



Part Number	Description	Electrical Data	Dimensions			Wt.
		AC Volts	L	W	H	
091-134A	Auto Interlock III	120V	4.5"	7.0"	7.0"	2

## Auto Interlock IV

### Features

- 50A, four pole, double throw relay
- 120V, 3 wire or 240V, 4 wire compatible
- Can be used to transfer two separate shore/generator circuits
- Hard wire installation
- Transfer time delay is adjustable from 2 seconds to 10 minutes, which allows the generator to warm up and stabilize before connecting to a load. The Auto Interlock IV is set at 24 seconds from the factory, please specify when ordering if modifications are required.



Part Number	Description	Electrical Data	Dimensions			Wt.
		AC Volts	L	W	H	
091-197	Auto Interlock IV	120/240V	4.25"	8.50"	8.50"	2

## Pure Sine Wave Output Inverters

### Features

- **Extended Surge Rating** - Surges to 2X continuous power for 2 seconds for motor loads
- **True Sine Wave AC Power** - For operation of sensitive and motor loads
- **Ignition Control** - Feature to turn inverter on/off via a 12 VDC signal and to minimize battery drain by switching the inverter off when the ignition key is turned off
- **Wide 10-18 VDC Input Range** - Ensures inverter operation on high voltage alternators found on many new vehicle chassis
- **Built-in 30A AC Transfer Relay** - Senses when outside AC Power is present and transfers the load from the inverter to the source of incoming power (shore or generator).
- **Quick Installation** - Huge wiring bay for easy access and quick connect AC in/out terminals for fast & easy wiring



Freedom X,  
available in  
1000W, 2000W & 3000W

### Optional Control Display



Remote Control Display  
808-0817-01

Part Number	Description	Electrical Data			Dimensions			Wt.
		Input	AC Out Continuous	AC Out Surge	L	W	H	
817-1000	Freedom X 1000	12V	1000 W @ 40°C	2000 W	13.4"	9.1"	3.7"	11.5
817-2000	Freedom X 2000	12V	2000 W @ 40°C	4000 W	14.6"	10.8"	3.9"	14.7
817-3000	Freedom X 3000	12V	3000 W @ 40°C	6000 W	15.4"	10.8"	4.0"	16.5
808-0817-01	Optional: Freedom X/ XC remote panel with 25' Cable				5"	3"	2"	

# SECTION 8: DC POWER MANAGEMENT



MDP-25  
Page 63



NavPac  
Page 63



StartGuard  
Page 63



DC Power  
Conditioners &  
Converters  
Page 64



Auto Isolator  
I & 3  
Page 65



Load Manager P  
Page 66



Power Timer  
Page 66



Load Manager 1H  
Page 67



Load Manager 1HP  
Page 67



Load Manager  
Page 68



Load Manager 2  
Page 68



Soft Start  
Page 69



Timer-X  
Page 69



Auto Current &  
Auto Current A  
Page 70



Auto Current F &  
Auto Current F - A  
Page 71



UV - OV Relay &  
OV Relay  
Page 72



Low Voltage Alarm  
Page 73



Alternate  
Action Relay  
Page 73



Time Delay Relay  
Page 74



Relay Board 2 &  
Relay Board 4  
Page 74



Power Distribution  
System - PDS - 100  
Page 75



## Mobile Data Power System

- Protects mobile computers against a system crash, lengthy reboot sequences, and loss of data
- Internal battery provides supplemental 12V to mobile data devices when a low vehicle battery is sensed: 5A for 60 mins., 10A for 20 mins., and 25A for 8 mins. and also contains a time out circuit to preserve battery
- Built in Multi-Stage filter provides clean power required by mobile electronics
- Provides a low output warning signals to mobile computers (such as Motorola® MW 800 series work stations)
- Internal three stage, temperature compensated charger maintains an internal 9A/H back-up battery in a fully charged stand-by state
- Heavy duty aluminum case with an access door for easy battery removal




Part Number	Description	Dimensions			Wt.
		L	W	H	
425-5750-0	MDP-25.0	8.00"	6.00"	5.75"	10

## NAV-PAC™

- Provides long duration voltage stabilization, electronics on-line with internal battery which is maintained by vehicle battery
- Upon sensing low or loss of input, the internal battery continues to provide supplemental power: 8A for 15 mins., 12A for 8 mins., and 18A for 2 mins.
- Timer disconnects the output 15 minutes after the loss of the input
- Absorbs line "spikes" and filters out electrical interference
- Configuration with the front panel power switch optional



Part Number	Description	Dimensions			Wt.
		L	W	H	
425-2988-0	NP-12, 20A	7.40"	6.20"	5.25"	6

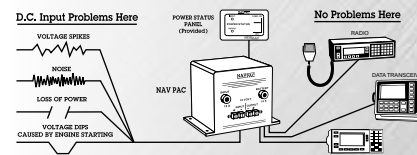


## StartGuard™

- Provides momentary voltage stabilization to electronics during the engine start
- Prevents programmed memory dump and re-booting of the microprocessor based voice and data transmitters
- Internal battery is switched on-line to the electronics when the starter solenoid is engaged
- When the engine is running, StartGuard™ goes off-line and the internal battery is re-charged by the alternator
- Input Voltage: 13.8 - 14.8VDC nominal, 15.5VDC max.
- Output: 20A max. for 1 min., 18A for 2 mins.
- Battery: 12VDC, sealed rechargeable 5A/H with a 5 - 7 year life (typical)



Brand conversion from NEWMAR

Part Number	Description	Dimensions			Wt.
		L	W	H	
426-3222-0	NS-12-20	3.50"	4.90"	8.25"	6

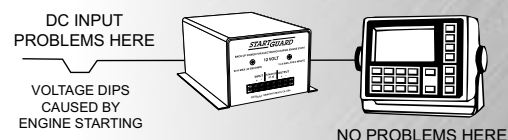

# DC POWER CONDITIONERS & CONVERTERS



Brand Conversion From NEWMAR

## Voltage Stabilizing Converters.

### Constant Output Voltage from Variable Input.

- Operate electronics at an optimal input voltage, even from nearly drained batteries
- Boost load voltage to compensate for any voltage drop in long wire runs from batteries
- Eliminate voltage drops during momentary high current drain from the batteries, i.e., during engine start
- Eliminate voltage fluctuation produced by charging sources
- Eliminate voltage overshoot resulting from the disconnection of high current loads

Part Number	Description	Electrical Data			Dimensions			Wt.
		Input Volts	Output Volts	Output Amps	L	W	H	
460-0123-0	12-12-3I	10-16	13.6	3	1.75"	3.5"	3.5"	1
460-1212-0	12-12-6I	10-16	13.6	6	1.75"	3.5"	3.5"	1
460-0610-0	12-12-12I	10-16*	13.6	12	14.0"	5.9"	4.25"	6
460-0617-0	12-12-35	10-16*	13.6	35	16.5"	6.8"	6.0"	12

\* 11.5V minimum start-up voltage, then operates @ 10-16V from 1A minimum to full load, 24V models available, contact factory



## Noise Filters

- Filters and regulates DC output to a constant 12V to power sensitive electronic equipment assuring noise free operation
- Regulated output is ideal for powering voltage sensitive loads that have difficulty operating from battery saver outputs

Part Number	Description	Electrical Data			Dimensions			Wt.
		Input Volts	Output Volts	Output Amps	H	W	D	
091-137	Battery Saver Filter	12-15	13.8	3	5.10"	2.95"	1.55"	1
380-2010-1	PC-10, Noise Filter	12/24	12/24	10	1.38"	3.49"	2.99"	1
380-1258-1	PC-25, Noise Filter	12/24	12/24	25	2.08"	4.20"	3.23"	2



Brand Conversion From NEWMAR

## DC Converters

- Convert a 20V-50V input to a 12V output for powering communication equipment, on negative ground systems
- Ideal for powering voice and data electronics
- Rugged anodized aluminum case designed to survive in a high vibration environment onboard emergency and off-road vehicles
- 12V to 24V step-up converters also available

Part Number	Description	Electrical Data			Dimensions			Wt.
		Input Volts	Output Volts	Output Amps	L	W	H	
420-2403-0	24-12-3	17-32	13.6	3	1.75"	3.50"	3.50"	1
420-3826-0	32-12-6	20-50	13.6	6	10.40"	4.20"	2.80"	3
420-3550-0	32-12-10	20-50	13.6	10	11.00"	5.90"	4.50"	4
420-3535-0	32-12-15	20-50	13.6	15	11.00"	5.90"	4.50"	5
420-3544-0	32-12-25	20-50	13.6	25	14.00"	4.70"	6.00"	8
420-3545-0	32-12-35	20-50	13.6	35	16.00"	4.70"	6.00"	12
420-3536-0	32-12-50	20-50	13.6	50	18.10"	6.80"	6.20"	16

# AUTO ISOLATOR I & AUTO ISOLATOR 3

**High Efficiency, No Diode Drop.**  
**Eliminates Diode Isolator in a 2 or 3 Battery System.**

## Auto Isolator I Features

- System consists of a controller that detects when a vehicle's alternator is charging the main battery and then closes a solenoid to tie-in charge to an auxiliary battery
- When the engine is off or the charge voltage is no longer present, the solenoid opens to isolate the batteries
- Upon "cranking" the engine with a charged auxiliary battery, the solenoid is energized to parallel the batteries and provide a starting boost
- If the auxiliary battery is low, the controller senses that condition and the batteries are not paralleled
- Uses a solenoid rather than an isolation diode which typically causes a 0.7V drop, thus auxiliary battery receives full charge voltage
- The starting boost provided by the paralleled batteries is especially useful in cold weather or when the battery is low



Controller

## Auto Isolator 3 Features

- System consists of a controller and two separate solenoids, for switching the batteries
- Allows a three battery system to be isolated from each other
- The system receives its power from the Battery one input or it can be switched ON/OFF
- When any of the three batteries go above 13.2V all three batteries are paralleled by the solenoids being energized, charging all three batteries and will disconnect the batteries when the voltage drops below 12.6V



Solenoid

## Specifications

**Auto Isolator I Controller: 091-139-CONT-12**

**Actuation Voltage:**  $\leq 13.3V$  (field adjustable)

**Battery Load:** 0.000125A

**Output Current:** 3A

**Auto Isolator 3 Controller: 091-208-CONT-12**

**Volts to parallel, normal operation:** 13.2 volts

**Hysteresis:** 0.60 volts (13.2 volts on - 12.6 volts off)

**Battery Load:** 0.020A

**Output Current:** 3A

**Auto Isolator I & 3 Solenoid: 091-139-SOL-12HO**

**Volts:** 12V

**Coil Current:** .65A

**Contact Rating:** 200A cont./600A surge

**Note** that Auto Isolator 3 uses two of this solenoid

Part Number	Description	Dimensions			Wt.
		H	W	D	
091-139-CONT-12	Auto Isolator I Controller	5.10"	2.95"	1.55"	0.5
091-208-CONT-12	Auto Isolator 3 Controller	5.10"	2.95"	1.55"	0.5
091-139-SOL-12HO	Auto Isolator I & 3 Solenoid	3.60"	3.30"	2.80"	2.0



# LOAD MANAGER P & POWER TIMER



## Load Manager P

- Preserves the Charge in the vehicle battery by two functions:
  - Timer disconnects the electronic loads after the engine shuts down
  - Battery condition sensor disconnects the loads when critical low voltage is sensed
- Timer and low voltage activation set points are user adjustable

## Features

- Prevents total discharge of the vehicle batteries caused by electronic loads left on after the vehicle is parked
- After the engine shuts down, the timer disconnects radios and computers after 1 - 2 hours (user selectable)
- Low voltage sense circuit activates the disconnect anytime critical low voltage is detected
- Sense circuit prevents nuisance disconnects caused by low voltage during the engine start sequence
- 30A high capacity disconnect relay manages multiple electronic loads

Part Number	Description	Electrical Data Specs		Load Shed Set-point Range	Dimensions			Wt.
		DC Volts	DC Amps		L	W	H	
091-141	Load Manager P	12	30	11.00V to 12.85V*	1.55"	5.10"	2.95"	.5
091-141-24	Load Manager P, 24 Volt	24	30	21.25V to 24.75V*	1.55"	5.10"	2.95"	.5

\*Factory Set to 11.00V / 22.00V



## Power Timer

- Prevents dead batteries due to any accessories being left on and forgotten
- Programmable disconnect time limit: 15 minutes to 8 hours.
- Weatherproof enclosed case

## Features

- Dip switches on the top of the unit control time out programming
- LED's indicate output status
- 30A rating controls multiple auxiliary loads on the vehicle
- High and low voltage disconnect built-in
- Rugged construction; components epoxy potted for survival in vibration
- Optional ignition sense wiring restores the power immediately to radios when the ignition is activated, rather than having to start the engine

Part Number	Description	Electrical Data Specs		Time Out Range	Dimensions			Wt.
		DC Volts	DC Amps		L	W	H	
390-0030-5	Power Timer	12	30	15 Min. to 8 Hrs.	3.7"	4.30"	2.13"	.5

# LOAD MANAGER 1H & LOAD MANAGER 1HP

## Load Manager 1H

- Monitors a 12V system and when detecting low voltage set-point, disconnects the load
- Automatically reconnects the load when the battery recovers 1.4V above disconnect set-point
- Preserves battery which prevents total discharge



### Features

- Preserves the batteries from totally discharging by disconnecting loads when the critical low voltage is sensed
- Reconnect sequence requires 1.4V recovery above the disconnect set point ensuring the battery condition improves before the loads are re-applied
- Field adjustable set and reconnect points for specific vehicle configuration
- Green/Red LED's indicate normal or low voltage conditions
- Easy to install compact case

Part Number	Electrical Data				Dimensions			Wt.
	Input Voltage	Amperage	Set Point	Adj. Range	L	W	H	
091-96-12	12	30	12.0 $\pm$ 0.05V	10.5 to 13V	2.63"	4.00"	1.50"	.25
091-96-24	24	30	24.0 $\pm$ 0.05V	21 to 26V	2.63"	4.00"	1.50"	.25

## Load Manager 1HP

- Low voltage disconnect preserves the batteries from totally discharging by disconnecting loads when the critical low voltage is sensed
- Engine start sensor prevents nuisance disconnection due to low voltage occurring during the engine start



### Features

- Monitors the battery and de-energizes up to a 75A load when the voltage drops to 11.5V
- Automatically reconnects when the battery recovers above 12.8V, ensuring the battery condition improvement before any loads are re-applied
- Encapsulated components for survival in high vibration and wet area applications

Part Number	Electrical Data				Dimensions			Wt.
	Input Voltage	Amperage	Set Point	Adj. Range	L	W	H	
091-167-12	12	75	11.5 $\pm$ 0.05V	10.5 to 13V	2.35"	3.10"	4.00"	.5

# LOAD MANAGER & LOAD MANAGER 2



## Load Manager

- Sends output signals in half second sequences to energize and disconnect up to seven control relays (five programmable)
- Applies the load to the system in a step fashion, allowing for voltage stabilization as equipment is added
- Automatically sheds loads sequentially when low voltage is sensed, maintaining proper voltage to high priority equipment

## Features

- Assures loads are applied and removed gradually, smoothing voltage variation and preventing damage to any sensitive loads
- When activated by a master switch, load control signals are generated in sequential order in half second delays as programmed by the installer
- When the master switch is deactivated, loads are sequentially de-energized
- Monitors the vehicle for a low voltage condition and automatically sends a signal to sequentially disconnect up to five low priority loads which maintains the voltage to any critical equipment
- Manual override input provided
- Included: monitor panel alerts the operators when the load shedding has occurred due to low voltage
- 12V, 80 ohm signal output activates a standard vehicle lamp and auxiliary relays (lamp not included)



Part Number	Description	Electrical Data Specs		Load Shed Factory Set Point	Dimensions			Wt.
		DC Volts	DC Amps		L	W	H	
091-32	Load Manager, with Indicator	12	30	11.5V	1.63"	4.75"	3.50"	.5



## Load Manager 2

- Prioritized sequential load shedding of two circuits as the battery voltage decays
- Dedicates the battery power to the critical equipment under low voltage conditions

## Features

- Ensures the most essential equipment has power priority over the other loads when the batteries are low
- Sequential circuit sheds the low priority loads first, ensuring longer run time for any critical equipment. This unit automatically resets when the voltage recovers and reconnects the high priority load first
- Prevents total discharge of the battery by disconnecting all the loads at critical low voltage set points
- Adjustable disconnect activation voltage set point
- 30A rating per circuit, 60A total (12V/24V)

Part Number	Description	Electrical Data Specs		Load Shed Factory Set Point	Dimensions			Wt.
		DC Volts	DC Amps		L	W	H	
091-79	Load Manager 2	12	30	11.5V	1.63"	4.25"	3.50"	.5
091-79-24	Load Manager 2, 24V	24	30	24V	1.63"	4.25"	3.50"	.5



## Soft Start

### Features

- Automatically sequences lights ON/OFF
- Eliminates power surges and sags in the electrical system
- Controls lamp relays
- Easy installation



The **Soft Start** is a precision, solid-state controller, which sequentially switches "ON" seven loads at half second intervals. Individual switches (user provided), can select a combination of outputs. These switches may be used to turn the outputs "ON" or "OFF" at any time. Using a "Master Control" switch starts the sequential switching when it is turned "ON". Similarly turning the "Master Control" switch "OFF" sequentially de-energizes the loads at half second intervals. A plug-in connector simplifies the installation.

Sequential switching of lamp loads is particularly important for vehicles with many lights. A Master switch that simultaneously controls a large number of lights can cause a voltage dip and overshoot which may damage sensitive electronic equipment. The **Soft Start** assures the loads are applied and removed gradually, smoothing voltage variation and preventing any damage to sensitive loads.

Part Number	Description	Dimensions			Wt.
		L	W	H	
091-27	Soft Start	4.25"	3.50"	1.50"	2

## Timer-X

### Features

- May be used as:
  - Delay-on-Pull-In relay, DOPI
  - Delay-on-Drop-Out relay, DODO
  - Duty Cycle-Timer relay
- Timer utilizes switches for precise settings from 1 second to 99 hours
- 30A relay switches AC or DC loads
- Flexible triggering either +12V or ground
- Operates on DC or AC Power



The precise **TIMER-X** universal timer may be operated in any of three modes, DOPI, DODO or CYCLE. The quartz crystal based timer intervals are easily and accurately set in the field using switches and a small screwdriver. The timer supports intervals in the broad range of 1 second to 99 hours. In the Cycle mode the ON and OFF times are independently controlled and may be set over the full range of time from 1 second to 99 hours. The heavy-duty, 30A, output relay provides both normally OPEN and normally CLOSED contacts and a red LED indicates when the relay is energized.

Flexible input triggering allows for either +12VDC or a contact closure to ground to initiate the timing cycle.

Part Number	Description	Dimensions			Wt.
		L	W	H	
091-214-12	Universal Timer, 12 Volt	4.75"	3.50"	1.60"	.5
091-214-24	Universal Timer, 24 Volt	4.75"	3.50"	1.60"	.5
091-214-120/240	120/240 VAC Adapter	N/A	N/A	N/A	.5

### Timer Settings



# AUTO CURRENT & AUTO CURRENT A



## Auto Current

### Features

- Senses the current flowing in and provides a remote indication that a load is operating
- Simplifies vehicle wiring
- Single indicator activates from multiple inputs

The **Auto Current** detects current flow and closes a relay providing a remote indication. Designed for applications where a remote indicator/warning light must be illuminated when one or more lights or other loads are energized. By detecting load current, any lamp or other load will cause the indicator to illuminate. The indicator circuit may be completely isolated from the circuit being sensed or may be operated from the same battery.

**Note:** Standard unit supplies +12V to the indicator. Available as -G for operating indicator by grounding.

Part Number	Description	Electrical Data			Switch Rating 12V	Dimensions			Wt.
		Resistance Ohms	Min. Operating Amps	Max. Operating Amps		H	W	D	
091-22-2	Auto Current -2	0.01	1.0	30	5A	2.63"	4.00"	1.50"	.25
091-22-3	Auto Current -3	0.01	0.5	30	5A	2.63"	4.00"	1.50"	.25
091-22-5	Auto Current -5	0.02	0.25	10	5A	2.63"	4.00"	1.50"	.25
091-22-6	Auto Current -6	0.02	0.10	4	5A	2.63"	4.00"	1.50"	.25
091-22-100	Auto Current -100	0.0003	4	100	5A	2.63"	4.00"	1.50"	.25



## Auto Current A

### Features

- Senses current
- Auxiliary input, ground to operate
- Simplifies vehicle wiring
- Single indicator activates from many inputs

The **Auto Current A** is an **Auto Current** with auxiliary input, which when grounded causes the output relay to operate. When the output relay is operated, it cycles ON and OFF to create a signal. The **Auto Current** portion of this device senses current, permitting use as an open door detector. The auxiliary input may be connected to any number of switches in parallel. Closing any switch operates the **Auto Current A** in addition to the current sensing. This feature makes it ideal as a detector for a "DO NOT MOVE VEHICLE" indicator. As with the standard **Auto Current**, the sense terminals are wired in series with the power supplied to the compartment lights.

**Note:** Standard unit supplies +12V to indicator. Available as -G for operating indicator by grounding.

Part Number	Description	Electrical Data			Switch Rating 12V	Dimensions			Wt.
		Resistance Ohms	Min. Operating Amps	Max. Operating Amps		H	W	D	
091-22-A	Auto Current -A	0.01	1.0	30	5A	2.63"	4.00"	1.50"	.25
091-22-A-6	Auto Current -A-6	0.2	0.10	4	5A	2.63"	4.00"	1.50"	.25

# AUTO CURRENT F - A & AUTO CURRENT F

## Auto Current F

### Features

- Senses current flow
- Provides a remote indication
- Simplifies vehicle wiring
- Single indicator operated from many loads
- Produces flashing output signal to an indicator light



The **Auto Current F** detects current and closes a switch when the sensed current flows to provide a remote indication. Designed for applications where a remote indicator must be illuminated when one or more lights or other loads are energized. By detecting load current, any lamp or other load will cause the indicator to illuminate. The indicator circuit may be completely isolated from the circuit being sensed, or may be operated from the same battery. A timer flashes the indicator lamp at one second intervals providing a highly visible display.

**Note:** Standard unit supplies +12V to an indicator. Available as -G for operating indicator by grounding.

Part Number	Description	Electrical Data			Switch Rating 12V	Dimensions			Wt.
		Resistance Ohms	Min. Operating Amps	Max. Operating Amps		L	W	H	
091-22F-2	Auto Current F-2	0.01	1.0	30	5A	2.63"	4.50"	1.50"	.25
091-22F-3	Auto Current F-3	0.01	0.5	30	5A	2.63"	4.50"	1.50"	.25
091-22F-5	Auto Current F-5	0.02	0.25	10	5A	2.63"	4.50"	1.50"	.25
091-22F-6	Auto Current F-6	0.02	0.10	4	5A	2.63"	4.50"	1.50"	.25
091-22-100-F	Auto Current F-100	0.0003	4	100	5A	2.63"	4.50"	1.50"	.25

## Auto Current F-A

### Features

- Senses current
- Auxiliary input, ground to operate
- Provides remote indication
- Simplifies vehicle wiring
- Flashing output to a warning indicator light
- Single indicator operated from multiple inputs



The **Auto Current F-A** is an **Auto Current F** with an auxiliary input, which when grounded causes the output relay to operate. When the output relay is energized, it cycles ON and OFF producing a flashing signal. The Auto Current portion senses the current permitting use as open door detector. The auxiliary input may be connected to any number of switches in parallel. Closing any switch or current sensing operates the **Auto Current F-A**. This feature makes it ideal as a detector for a door open "DO NOT MOVE VEHICLE" indicator. As with the standard Auto Current, these sense terminals are wired in series with the power supplied to the compartment lights.

**Note:** Standard unit supplies +12V to the indicator. Available as -G for operating indicator by grounding.

Part Number	Description	Electrical Data			Switch Rating 12V	Dimensions			Wt.
		Resistance Ohms	Min. Operating Amps	Max. Operating Amps		L	W	H	
091-22F-A	Auto Current F-A	0.01	1.0	30	5A	2.63"	4.50"	1.50"	.25
091-22F-A-6	Auto Current F-A-6	0.2	0.10	4	5A	2.63"	4.50"	1.50"	.25



# OVER & UNDER VOLTAGE RELAYS



## UV OV Relay

### Features

- Monitors system battery voltage
- Detects under voltage and warns of a possible dead battery
- Programmable switches set under voltage trip point
- Detects over voltage and warns of possible battery boil over
- Provides relay contacts for over voltage and under voltage

The **UV-OV Relay** Precise - programmable voltage detector monitors battery voltage and detects both over voltage and under voltage conditions. The under voltage trip point is programmed by the use of 3 dip switches, which provide possible settings ranging from 11.44V to 13.01V. Over voltage trip point programming is done with 8 possible settings ranging from 13.66V to 15.06V. These dip switches are easily accessed by removing a snap-on cover at the top of the unit. Heavy duty, relay contacts are provided for both conditions which may be wired to warning devices indicating abnormal conditions. Three LED indicators are provided under the snap-on cover for system troubleshooting, yellow for under voltage, green for normal, and red for over voltage.

Part Number	Description	DC Volts	Under Voltage Program Range	Over Voltage Program Range	Dimensions			Wt.
					L	W	H	
091-45	UV OV Relay	10 to 17	11.44 to 13.01V	13.66 to 15.06V	1.50"	3.50"	4.25"	.5

## OV Relay

### Features

- Monitors battery system voltage
- Detects over voltage and warns of a potential battery overcharge/boil over
- Relay contacts close upon over voltage being sensed, and ties to an alarm
- Easy installation



The 091-108-012 Over Voltage Relay continuously monitors the voltage of the battery. The unit is factory set to actuate at 17V, reset at 14V, and may be adjusted to other voltage trigger points. The output relay is capable of switching 30A, and both "Normally Open" and "Normally Closed" contacts are provided.

Part Number	Description	Electrical Data				Dimensions			Wt.
		DC Volts	DC Amps	Input Amps Relay ON	Input Amps Relay OFF	L	W	H	
091-108-012	OV Relay	12	30	.08	.015	1.55"	4.50"	2.95"	.25

# LOW VOLTAGE ALARM & ALTERNATE ACTION RELAY

## Low Voltage Alarm / 1901

### Features

- Detects low battery voltage
- Programmed 120 second time delay
- High current relay, 30A
- Operates any indicator or alarm
- Meets NFPA 1901 requirements



The Low Voltage Alarm / 1901 detects when battery voltage drops below a threshold and remains low for 120 seconds. At that time, a relay is energized activating a low voltage indicator or alarm. Available for either 12V or 24V electrical systems, the unit contains LED indicators: to aid in installation and test. A green indicator is illuminated whenever the voltage is normal. When the voltage drops below the set-point and remains low for 120 seconds, the green LED is extinguished and the red LED illuminates. The set-point and time delay features meet the requirements of NFPA 1901, paragraph 9-3-3. Voltage set-point is adjustable to meet special requirements.

Easily installed, the Low Voltage Alarm requires only two wires to sense the battery voltage. The 30A contacts on the relay provide ample capacity to operate the low voltage alarm and indicator. Availability of a normally closed contact in addition to the normally open contact permits a wide variety of connections in the load circuit.

Part Number	Description	Electrical Data		Load Shed Factory Set Point	Dimensions			Wt.
		DC Volts	DC Amps		L	W	H	
091-85-12	Low Voltage Alarm, 12V	12	30	11.8V	2.95"	5.10"	1.55"	.25
091-85-24	Low Voltage Alarm, 24V	24	30	23.6V	2.95"	5.10"	1.55"	.25
091-85-12/24	Low Voltage Alarm, 12V/24V	12/24	30	11.6V/23.2V	2.95"	5.10"	1.55"	.25

## Alternate Action Relay

### Features

- Remotely control a load from multiple locations
- 30A contacts
- Signal output to indicator light identifies position of relay
- Easy installation



The Alternate Action Relay allows remote turn ON/OFF by grounding an input to the relay. The application of a ground energizes the relay and turns the load "ON". A second input to the same terminal de-energizes the relay and turns the load "OFF". Both inputs may come from the same switch or from any number of switches in parallel. A load may be turned "ON" from one location and turned "OFF" from another. An output signal on the Alternate Action Relay operates a remote indicator to indicate when the load is energized.

Part Number	Description	Electrical Data		Dimensions			Wt.
		DC Volts	DC Amps	L	W	H	
091-98-12	Alternate Action Relay	12	30	2.63"	4.00"	1.50"	.25

# TIME DELAY RELAYS & RELAY BOARDS



## Time Delay - DODO

### Features

- 30A contacts
- Relay closes immediately and remains closed for a period of time after being de-energized
- Field adjustable time delay
- Easy installation

Time Delay Relay keeps a load energized for a set time interval after the load is de-energized. A typical application is to take control of the vehicle interior lighting to permit operators time for cleaning or maintenance. Both normally open and normally closed output contacts are provided (30A). The device requires three input connections: +12V power, ground and a +12V signal. When the signal is applied, the relay closes immediately. When the signal is removed, the relay remains energized for the designated time. Five models are available ranging in delay times from 2 seconds to 60 minutes. Time delay on each model is field adjustable with a defined range to match the application.

Part Number	Description	Electrical Data		Settings			Dimensions			Wt.
		DC Volts	DC Amps	Min.	Max.	Set Point	L	W	H	
091-103-012-A	Time Delay Relay - A	12	30	1.5 min.	6 min.	3 min.	2.63"	4.50"	1.50"	.25
091-103-012-B	Time Delay Relay - B	12	30	6 min.	27 min.	15 min.	2.63"	4.50"	1.50"	.25
091-103-012-C	Time Delay Relay - C	12	30	12 min.	60 min.	30 min.	2.63"	4.50"	1.50"	.25
091-103-012-D	Time Delay Relay - D	12	30	4 sec.	15 sec.	10 sec.	2.63"	4.50"	1.50"	.25
091-103-012-E	Time Delay Relay - E	12	30	2 sec.	3.3 sec.	2 sec.	2.63"	4.50"	1.50"	.25
091-103-012-F	Time Delay Relay - F	12	30	.5 sec.	1.8 sec.	1 sec.	2.63"	4.50"	1.50"	.25

## Relay Board 2 and Relay Board 4

### Features

- Available with two or four relays
- 30A contacts
- LED's indicate when the relay is energized
- Normally closed and open contacts
- Use with a Load Manager
- Easy installation



Choose either a two or four relay that simplifies installation and wiring. Relays are mounted and energized individually from the power supplied through the terminal strip. LED indicators adjacent to each relay illuminate whenever the relay is energized. Load circuits are connected directly to the top of the relays with 1/4 inch quick disconnect terminals. By installing this one assembly, the complexity of mounting multiple individual relays is reduced and much of the wiring to the relay coils are eliminated. Operation by either supplying voltage to the relay or grounding the relay coil. Models are available in 12V/24V.

Part Number	Description	# of Relays	Electrical Data		Com. Connection	Input to Operate	Dimensions			Wt.
			DC Volts	DC Amps			L	W	H	
091-32-029N-12	2 Relay Board	2	12	30 per relay	12V	Ground	1.45"	3.75"	2.60"	.25
091-32-029P-12	2 Relay Board	2	12	30 per relay	Ground	12V	1.45"	3.75"	2.60"	.25
091-32-029N-24	2 Relay Board	2	24	30 per relay	24V	Ground	1.45"	3.75"	2.60"	.25
091-32-029P-24	2 Relay Board	2	24	30 per relay	Ground	24V	1.45"	3.75"	2.60"	.25
091-32-024N-12	4 Relay Board	4	12	30 per relay	12V	Ground	1.55"	3.50"	4.75"	.5
091-32-024P-12	4 Relay Board	4	12	30 per relay	Ground	12V	1.55"	3.50"	4.75"	.5
091-32-024N-24	4 Relay Board	4	24	30 per relay	24V	Ground	1.55"	3.50"	4.75"	.5
091-32-024P-24	4 Relay Board	4	24	30 per relay	Ground	24V	1.55"	3.50"	4.75"	.5



## 100A Power Distribution System Simplifies Wiring of Electronic Accessories

### Features

- Quick and easy way to connect, protect, and program power to emergency vehicle accessories
- Provides six dedicated fused circuits configured in three load groups to power radios, emergency lights, sirens, video, MDT, radar, and more
- Flexible circuit activation/deactivation allows installer to set battery power use priority independently per two circuit load group:
  - Powered only with ignition
  - Timed disconnect
  - Always ON, with load group LVD
  - Always ON, with NO load group LVD
- Each circuit is fuse protected with a LED indicator which identifies the blown fuse position, simplifying troubleshooting
- Master low voltage disconnect protects batteries from an extreme discharge
- Heavy duty studs for battery connections
- Screw terminals for secure load connections
- Increase circuit capacity by wiring multiple PDS using parallel busing kit



### Specifications

**Input:** 12V, neg. ground

**Power Consumption:** Idle: 8mA, Active: 180 mA/circuit

**Maximum Load per PDS:** 100A, 20A max. per fuse position

**Maximum Load Per System:** 3 PDS wired in parallel, 18 circuits

**Fuse Type:** ATC/ATO (not included)

**Programmable Shutdown per Load Group:** 2 mins. - 13 hours

**Disconnect Range:** 11.8-10.6VDC

**Master Low Voltage Disconnect:** @ 10.5V (factory programmable 10.0-11.8V)

**Case:** Powder coated aluminum

**Bus:** Nickel plated copper

**Protective Cover:** Top panel connections and switches

Part Number	Description	Circuits	Max Loads	Dimensions			Wt.
				L	W	H	
390-5711-0	PDS-100	6	100A Total, 20A Per Position	6.20"	5.20"	2.00"	2

# SECTION 10: INSTALLATION ACCESSORIES



Mounting Plate for  
Auto Eject WP  
Page 77



Mounting Plate for  
Super Auto Eject  
Page 77




Mounting Plate for  
Air Eject, 12V  
Page 77




Mounting Plate for  
Super 30 Auto Eject  
Page 77



Mounting Plate for  
Super 16 Auto Eject  
Page 77



Charger  
Mounting Plates  
Page 77



Air Compressor  
Mounting Plates  
Page 77



Waterproof  
Circuit Breakers  
Page 78



High Current  
ANL Fuses  
Page 78



Waterproof  
Junction Boxes - PS  
Page 79




Weatherproof  
Junction Boxes - BX  
Page 79



Waterproof Fittings  
RA Series  
Page 80



Waterproof Fittings  
CCX Series  
Page 80



Bus Bars  
Page 80



Terminal Strips  
Page 80

# MOUNTING PLATES

## Auto Eject Plates

- Simplifies Installation of Cord and Air Ejects
- Green Light Indicates When Inlet is Energized
- Heavy Duty Stainless Steel Plate, Paint to Match Vehicle



**091-185-010**  
for Auto Eject WP



**091-185-009**  
for Super  
Auto Eject



**091-182-027-120**  
for Super 16  
Auto Eject  
120VAC



**091-159-081-120**  
for Super 30  
Auto Eject  
120VAC



**091-185-011**  
for Air Eject  
12V



**091-228-002-120**  
for indicator and  
Super Auto Eject  
120V

**091-182-027-240**  
for Super 16  
Auto Eject  
240VAC

**091-159-081-240**  
for Super 30  
Auto Eject  
240VAC

**091-185-013**  
for Air Eject  
24V

**091-228-002-240**  
for indicator and  
Super Auto Eject  
240V

## Charger/Pump Mounting Plates

- Simplifies Installation and Removal
- 1/8" Aluminum with Charger and Vehicle Mounting Holes
- Pump Plates Have Integral Vibration Mounts



**091-185-006**  
**E-Z Mounting Plate Small**  
Auto Charge 11  
Auto Charge 12  
Euro Charge I  
Euro Charge II  
Pump Plus HO



**091-185-007**  
**E-Z Mounting Plate Medium**  
Auto Charge 20  
Auto Charge 12 HO  
Auto Charge 12 PIM  
Euro Charge III




**091-185-008**  
**E-Z Mounting Plate Large**  
LPC 40  
Auto Charge 1200  
Auto Charge 1200 Remote  
Auto Charge D, D2  
Auto Charge 4000  
Pump Plus 1200  
Auto Charge D Pump Plus




**091-200-EZM**  
**E-Z Slide Mount Plate Large**  
LPC 40  
Auto Charge 1200  
Auto Charge 1200 Remote  
Auto Charge D, D2  
Auto Charge 4000  
Pump Plus 1200  
Auto Charge D Pump Plus


## Air Compressor Mounting Plates

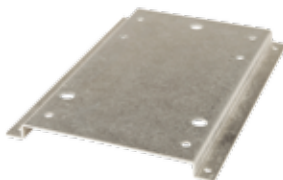

**091-9H-1**  
Auto Pump AC Mounting Plate

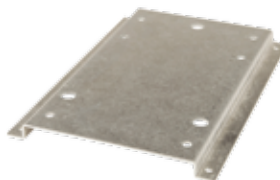

**091-9HP-H**  
Auto Pump AC HP Mounting Plate



**091-9-12V-HP-H**  
Auto Pump 12V & 12V HP Mounting Plate



# CIRCUIT PROTECTION

## Waterproof, High Amperage Surface Mount Circuit Breakers



### Features

- Combines switching and a circuit breaker function in one unit
- Compact size and surface mount configuration protects high amperage circuits
- Trip delay curve accommodates high surge amperage from motor start
- Push to disconnect button de-energizes the circuit for maintenance
- Latch arm resets the breaker after overload, but cannot be held in the "ON" position if a short remains on the circuit
- 1/4" terminal studs with protective covers
- Waterproof - ideal for marine and truck applications
- Ignition is protected for safe use in gasoline powered applications
- High impact plastic molded case
- (2) 1/4" holes, mounting hardware not provided
- Thermal trip sensing

Part Number	Description	Volts	Amps	Max Interrupt Current	Dimensions			Wt.
					L	W	H	
090-0030-0	WBS-30	42V	30A	3000A	2.88"	1.88"	1.75"	.25
090-0040-0	WBS-40	42V	40A	3000A	2.88"	1.88"	1.75"	.25
090-0050-0	WBS-50	42V	50A	3000A	2.88"	1.88"	1.75"	.25
090-0060-0	WBS-60	42V	60A	3000A	2.88"	1.88"	1.75"	.25
090-0080-0	WBS-80	42V	80A	3000A	2.88"	1.88"	1.75"	.25
090-0100-0	WBS-100	42V	100A	3000A	2.88"	1.88"	1.75"	.25
090-0120-0	WBS-120	42V	120A	3000A	2.88"	1.88"	1.75"	.25
090-0150-0	WBS-150	42V	150A	3000A	2.88"	1.88"	1.75"	.25

## High Current ANL Fuses / Fuse Blocks

Essential safety item for all inverter installations and other high amperage DC circuit, over-current protection.

### Features

- Heavy duty 500A, insulated, compact fuse block with corrosion resistant 5/16" studs
- Secures to the surface with two #10 flat head screws or bolts (not included)
- Clear lexan cover insulates the conductive parts
- Accepts industry standard ANL tin-plated copper fuses, purchase separately. 80-500A ratings
- See through mica element in the fuse body for easy identification of a blown link



Case Sizing: 6.25" x 3.00" x 2.00"

Part Number	Description
100-4407-5	AFB-500, Fuse Block
100-0XXX-0	ANL Fuse, specify amperage: 80, 100, 150, 200, 250, 300, 350, 400, 500
All ANL fuses rated to 80V DC	

## PX Series Waterproof Junction Boxes


### Features

- Ideal for wiring connections onboard emergency vehicles where wire connections are subject to outside conditions
- Made from rugged, non-corrosive, high impact polypropylene
- Snap-on cover provides a watertight seal
- "Universal" cut-to-fit (see diagram) cable entries accommodate a wide cable range
- Multiple connect strips with "captive" screw compression wire terminals installed
- Multiple knockouts provided for conduit access (in addition to cable entries)
- IP54 IEC Waterproof Rating



Part Number	007-3001-0	007-3002-0	007-3003-0
Description	PX-1	PX-2	PX-3
Number of Connector Strips	1	2	2
Positions per Strip	6	6	9
Max Wire Gauge	16	16	16
Number of Cable Entry Points	5	7	7
Number of Cable Entries Installed	3	7	7
Spare Cable Entries Provided	2	0	0
Cable Diameter Range (Inches)	0.14 - 0.81	.014 - 0.81	0.14 - 0.99
Cable Diameter Range (mm)	3.5 - 20.5	3.5 - 20.5	3.5 - 25.5
Box Size	2.95" x 2.95" x 1.66"	3.35" x 3.35" x 1.66"	4.45" x 4.45" x 2.29"

Graduated Diameter Flexible Cut-to-fit Entries



## BX Series Weatherproof Junction Boxes

### Features

- Provides secure, weatherproof protection of the wiring connections
- Rugged cast aluminum box with white enamel finish
- Easy wiring access through multiple grommeted cable entries
- Removable connector strips secure conductors with compression screws - no terminals required, see the matrix below for the number of connector positions and wire gauges



Part Number	007-6001-0	007-6002-0	007-6003-0
Description	BX-1	BX-2	BX-3
Number of Connector Strips	1	1	2
Positions per Connector Strip	6	12	11
Max Wire Gauge	16	16	14
Max Amps (per position)	6	6	10
Cable Entry Points	2	8	2
Max Cable Diameter	0.25"	0.37"	0.59"
Box Size	2.0" x 2.0" x 1.2"	4.4" x 2.4" x 1.2"	4.7" x 3.7" x 1.3"

# TERMINAL STRIPS

## Waterproof Fittings - RA Series Right Angle

### Features

- Route cables at a 90° angle through vertical and horizontal surfaces. A low profile design keeps the cable secured and close to the surface
- Molded of nylon, the Sculpted shape doesn't have sharp edges and provides a radiused 90° feed-thru bend in the cables without damage
- Easy installation: slide the silicone compression rings on the cable, mount the base piece with the waterproof gasket, then attach the sealing end cap to create an IP 65 waterproof seal

Part Number	Description	Cable Diameter Range	Dimensions (Inches)
007-2010-0	RA-1	0.1" - 0.25"	2.17 x 1.65 x 0.63
007-2020-0	RA-2	0.27" - 0.35"	3.23 x 2.44 x 0.95
007-2030-0	RA-3	0.39" - 0.47"	3.23 x 2.44 x 0.95
007-2040-0	RA-7	(2 x) 0.1" - 0.23"	3.23 x 2.44 x 0.95



## Waterproof Fittings - CCX Series

### Features

- Create a 100% waterproof seal when routing cables through vehicle roofs
- Allowing installation/removal with a connector still attached
- Entry hole is pre-drilled in a seal with a slit to edge allowing feed-thru of the cable with a factory installed connector attached

Part Number	Description	Cable Diameter Range	Max Connector Diameter	Dimensions	
				Dia.	Height
007-2003-0	CCX-R	0.47"-0.59"	1.57"	2.59"	.83"
007-2004-0	CCX-S	0.35"-0.55"	.83"	1.77"	.83"
007-2005-0	CCX-T	0.18"-0.35"	.83"	1.93"	.75"




## Bus Bars

### Features

- Heavy duty, 500A bar, with 5/16" studs, on 1" centers, in 1/4" thick nickel plated copper bar
- A clear insulating protective cover is provided

Part Number	Description	Quantity of 5/16" Studs	Dimensions	
			L	W
002-3595-2	BB-2, Bus Bar	2	3.063"	1.50"
002-3595-0	BB-2/8, Bus Bar	2 plus 8 - #8 screws	6.063"	1.50"
002-3595-5	BB-5, Bus Bar	5	6.063"	1.50"
002-3595-8	BB-8, Bus Bar	8	9.063"	1.50"

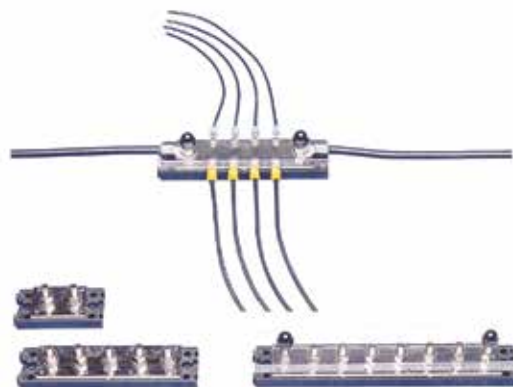

## Terminal Strips

### Features

- 100A Dual terminal strips with #8 screws on 3/4" centers

Part Number	Description	# of Terminals	Dimensions	
			L	W
064-3589-1	TS-2x4, Terminal Strip	8	3.00"	1.50"
064-3589-2	TS-2x8, Terminal Strip	16	6.00"	1.50"





# SECTION 11: ENGINE / VEHICLE ACCESSORIES



Auto Reel  
Page 82



Power Cord Reel  
Page 82



Air Line Reel  
Page 82



R.F. Control  
Page 83



Safety Lock  
Page 84



Safety Lock 3  
Page 84



Safety Lock 4  
Page 84



Safety Lock D  
Page 84



Auto Throttle 1  
Page 84



Radio Chargers  
Page 85



7 Door Display  
Page 86



10 Door Display  
Page 86



Relay Output  
Page 86



Audible Annunciator  
Page 86



Switch Enclosure  
Page 86



Data Port  
Page 87



USB Dual Ports  
Page 87



Auto Touch  
Page 88



Temperature Monitor  
Page 88



Shoreline/Air/  
Level Alarms  
Page 89



Bluetooth Module  
Page 89

# CORD REELS

## AUTO REEL

### Features

- After the Auto Eject is ejected from the receptacle, the Auto Reel automatically retracts the cord to a pre-determined stop point
- Eliminates damage to the plug/cord from vehicles movement
- With the Auto Safe option: After the cord is disconnected, the power is shut off to prevent any electric shock if the cord gets severed/wet
- Spring retractable with latch
- Wall or ceiling mount
- 45 foot, #12 AWG 3 conductor cord
- Adjustable cord stop



Part Number	Description	Electrical Data		Dimensions			Wt.
		AC Volts	Amps	L	W	H	
091-220-20-120	Auto Reel	120	20	12.00"	14.00"	10.00"	28
091-220-20-120-AS	Auto Reel w/ Auto Safe	120	20	12.00"	14.00"	10.00"	28

See pages 33-38 for more information on Auto Ejects

## Power Cord Reel

### AC CORD REEL FOR AUTO EJECTS



### Features

- NEMA 5-20P connector attached, mates with 20A Auto Eject
- Spring retractable with latch
- Wall or ceiling mount
- 45 foot, #12 AWG 3 conductor cord
- Adjustable cord stop

Part Number	Description	Wt.
L4545 12 3 3	Power Cord Reel	28

## Air Line Reel

### AIR LINE REEL FOR AIR EJECTS



### Features

- Female coupler supplied to mate with Air Eject
- Spring retractable with latch
- Wall or ceiling mount
- 50 foot, 1/4 inch, 300 PSI hose
- Adjustable cord stop

Part Number	Description	Wt.
RT450-OLP	Air Line Reel	25

## Activate Up to 4 In-Building Functions from Vehicle

- Garage Doors
- Vehicle Bay Lighting
- Exhaust Fans
- Traffic Lights

### Features

- Vehicle mounted transmitters generate four unique signals
- Typical transmitter range: 155 feet
- Station mounted AC powered receiver actuates up to four in-building systems/accessories
- Multiple transmitter codes permit: setting unique frequencies for up to 32 vehicles, and assigning dedicated controls per vehicle, per single bay or area
  - Set common station activation frequency for all vehicles
- Code entry dip switches



Transmitter



Receiver

Part Number	Description	Electrical Data		Output Channels	Trans. Codes	Dimensions			Wt.
		Input Power	Frequency			L	W	H	
091-133-T	Transmitter	12V, 0.015A	418 MHz	120	4	2.95"	4.5"	1.55"	1
091-133-R	Receiver	12V, 50/60 Hz. 0.015A	418 MHz	120	4	4.75"	3.5"	1.55"	1



# SAFETY LOCKS AND AUTO THROTTLE 1

Permits Running Engine with Ignition Key Removed.

Prevents Unauthorized Drive Away of Vehicles Left Unattended With the Engine Running.



**Safety Lock D**  
**091-174**  
For Chrysler / Jeep / Dodge Vehicles  
2006 to 2008



**Safety Lock**  
**091-148-12**  
Single Wire Ignition Output



**Safety Lock 3**  
**091-155**  
Three Wire Ignition Output



**Safety Lock 4**  
**091-160**  
Four Wire Ignition Output

## Features

- Safety lock activated when the ignition key is removed
- When the safety lock activates, the engine remains on and shuts down automatically if the controls are manipulated in an attempt to move the vehicle
- Select models to provide single or multiple ignition outputs:
  - Foot brake
  - Parking brake
  - Gear shift
  - Other installer defined kill switch activation
- Safety lock override/re-start when the ignition key is inserted
- 30A relay contacts

Part Number	Description	Electrical Data		Dimensions			Wt.
		Volts	Outputs	L	W	H	
091-148-12	Safety Lock	12V	1	2.63"	4.50"	1.50"	.25
091-155	Safety Lock 3	12V	3	4.25"	3.50"	1.63"	.25
091-160	Safety Lock 4	12V	4	3.00"	5.25"	1.50"	.25
091-174	Safety Lock D	12V	*	2.95"	5.10"	1.55"	.25

\*For Chrysler / Jeep / Dodge Vehicles

## High Idle Control Automatically Increases Alternator Output

### Features

- Time delay eliminates cycling
- Usable with any throttle actuator
- Simple, easily installed

The Auto Throttle 1 is a voltage detector, designed to operate any throttle system, to increase engine speed when insufficient alternator output drops the battery voltage. Time delays are provided to inhibit the unit from operating, when the voltage drops for only a short period of time.

Then, once a high idle is produced, it is maintained for 5 minutes. This reduces the ON/OFF cycling.

The output of the Auto Throttle 1 is the closure of a relay, with 20A contacts. This contact closure may be utilized to operate any actuator, or switch the input to an electronic engine control. Operation occurs when the unit senses less than 12.5V, for a minimum of 15 seconds. The relay then operates, to produce the high idle, and remains energized for at least 5 minutes, or until the voltage rises above 13.4V, whichever occurs later.

The Auto Throttle 1 senses battery voltage and provides the necessary control signals to speed up the engine. It does not provide the mechanism to increase the speed, this is supplied by the installer.



Part Number	Description	Electrical Data Specs		High Idle Factory Set Point	Dimensions			Wgt
		DC Volts	DC Amps		L	W	H	
091-84	Auto Throttle 1	12	30	12.5V	5.10"	1.55"	2.95"	.25

# CHARGING SOLUTIONS FOR RADIO BATTERIES

## In-Vehicle Charging Solutions for Two-Way Radio Batteries.

### Features

- K-Line Chargers designed for in-building or in-vehicle with available accessories
- Models are available for charging one (K1M), two (K2M), six (K6M) or 12 (K12M) batteries and the battery may be charged while on or off the radio
- K-Line chargers can be powered by AC as well as 12 or 24 volt DC power
- Available for popular radios including Motorola, Kenwood, Harris, Tait, Hytera, Icom, and many others
- Two year warranty



Model: 500-K1M-XX

#### Optional:

Mounting Bracket for  
K-Line Models  
Call for more information



Model: 500-K12M-XX



Model: 500-K6M-XX



Model: 500-K2M-XX

Part Number	Description	Electrical Data Specs			Compatible With	Dimensions			Wt. (lbs)
		Input AC	Input DC	Charge Rate		W	L	H	
500-K1M-XX	One Unit Charger	N/A	12V-24V 1.0A (min)	up to 900 mA	Li-Io / LiPo NiMH / NiCd	3.8"	5.2"	3.0"	0.6
500-K2M-XX	Two Unit Charger	100-240 VAC .058A	12V-24V 1.8A (min)	up to 900 mA	Li-Io / LiPo NiMH / NiCd	3.9"	5.4"	3.2"	0.7
500-K6M-XX	Six Unit Charger	100-240 VAC 2A	12V-24V 5.4A (min)	up to 900 mA	Li-Io / LiPo NiMH / NiCd	20"	5.8"	3.6"	3.1
500-K12M-XX	Twelve Unit Charger	100-240 VAC 2.2A	12V-24V 12.5A (min)	up to 900 mA	Li-Io / LiPo NiMH / NiCd	20"	5.8"	3.6"	3.6

(XX) Indicates pod

## Vehicle Only Chargers

### Features

- Ultra-rugged for Motorola APX6000 / 7000 / 8000 radios
- Includes USB port for charging a mobile phone or tablet
- Variety of mounting options
- Models are available for charging one battery (500-KVOAPX1) and 4 batteries (500-KVOAPX4)
- Chargers can be powered by 12 or 24 volt DC power
- Two year warranty



Model: 500-KVOAPX4

XLR Cable for  
500-KVOAPX4  
shown here



Model: 500-KVOAPX1  
(Radio not included)

Part Number	Description	Electrical Data Specs		Battery Voltage Range	DC Power Cable	Dimensions			Wt. (lbs)
		Input	Charge Rate			W	L	H	
500-KVOAPX1	One Unit Charger w/ secure 4-pin connector cable	12V-24V 1.0A (min)	up to 800 mAh	7.2V - 10.8V	18 AWG	2.6"	5.3"	3.1"	0.6
500-KVOAPX4	Four Unit Charger w/ locking XLR connector cable	12V-24V 4.0A (min)	up to 800 mAh	7.2V - 10.8V	16 AWG	16.0"	10.0"	5.0"	7.3

# DASHMOUNT ACCESSORIES

## USB/USB-C EZ Mount Assembly

### Features

- Dual USB Charging Port with 12V accessory output
- 4.8 Amps allows charging of both smart phone and tablet at same time
- Can be connected to 12V or 24V switched ignition or direct to battery



## Switch Enclosure

### Features

- Heavy duty enclosure
- SVR switches snap in (accepts switches with pigtail leads only)
- Easy to mount
- Mounts on top or underneath dashboard
- Choice of 3 colors



## AUX / USB Pass Through

### Features

- Front Panel -USB Type-A Receptacle (4 pin), 3.5 Stereo Jack (3 pin)
- Back Panel - 6' USB Type-A plug, 6'.3 Stereo plug



Available with Weatherproof door see page 91

Part Number	Description	Dimensions			Wt.
		L	W	H	
091-219-5-038-1	USB EZ Mount Assembly	3.1"	7.5"	5.5"	1.5 lbs
091-264-038-1	USB-C With Terminals, Mounted on Plate and 12v Outlet	3.1"	7.5"	5.5"	1.5 lbs
091-255	Switch Enclosure	3.72"	2.06"	2.18"	.10
091-249	Audio / USB Pass Through	1.73"	0.98"	1.73"	.25
092-249-WP	Audio / USB Pass Through with Weatherproof door	1.73"	0.98"	1.73"	.25

## Open Door Indicator Panels



10 Door  
091-178-10A



7 Door  
091-178-7A

### Features

- Choose 10 or 7 door LED display
- Door/compartament mounted switches feed signal to display (switches installer provided)
- Audible alarm options
  - In-dash buzzer
  - In-dash panel with relay for remote high decibel warning device (3A max.)

## Optional Audible Alarms



Relay Output  
091-178-9



Audible Annunciator  
091-178-8

### Features

#### Remote Audible Alarm Relay Panel:

- Wires to open door indicator panel
- Contains relay that actuates remote audible alarm, installer provided

#### In-Dash Audible Alarm Panel:

- Wires to open door indicator panel
- Contains audible buzzer

Part Number	Description	Input Power	Dimensions			Wt.
			L	W	H	
091-178-10A	10 Door Display	12V	1.98"	1.02"	0.45"	1
091-178-7A	7 Door Display	12V	1.98"	1.02"	0.45"	1
091-178-8	Audible Annunciator	12V	1.98"	1.02"	0.45"	1
091-178-9	Relay Output	12V	1.98"	1.02"	0.45"	1



# USB DUAL PORT AND DATA PORT

USB-A (QC 18V) & USB-C (PD 45W) Outputs in a Single Switch Allows Max Output Power to Charge Phones, Tablets and Laptops at the Same Time.

## Features

- 63 watt max output; USB A, (18 watts) and USB-C (45 watts)
- Quick and easy way to recharge electronic devices in a vehicle
- Built-In LED Indicator indicates device is powered
- Designed for easy installation in vehicle switch panels
- Reverse polarity protected
- All USB's can be connected to 12 or 24V switched ignition or directly to battery, and can charge phone and tablet or USB C equipped laptop simultaneously



Part Number	Description	Electrical Data			Dimensions			Wt.
		Input Volts	Output Volts	Output Amps	L	W	H	
091-264	Dual Port USB-C & USB-A, SVR	10-30 VDC	USB-A 3.6 - 12 VDC	5.5 Amps	1.73"	0.98"	1.73"	.25
			USB-C 3.3 - 21 VDC					
091-264-N	Dual Port USB-C & USB-A, NGR	10-30 VDC	USB-A 3.6 - 12 VDC USB-C 3.3 - 21 VDC	5.5 Amps	1.97"	1.02"	1.97"	.25
091-219-5	USB Dual Port 4.8 with terminal connectors	10-30 VDC	4.8-5.2 VDC	4.8 Amps	1.73"	0.98"	1.73"	.25
091-219-5-010	USB Dual Port 4.8 with wires (pigtail lead)	10-30 VDC	4.8-5.2 VDC	4.8 Amps	1.73"	0.98"	1.73"	.25
091-219-5-WP	USB Dual Port 4.8 with Weatherproof door	10-30 VDC	4.8-5.2 VDC	4.8 Amps	1.73"	0.98"	1.73"	.25

## Provides Access To Router Or Telephone Line

### RJ 45 Features

- Provides access to a router
- Designed for easy installation in the vehicle's switch panel
- Standard RJ45 Connector
- Category 3, 5E, 6, & 6A performance
- EIA/TIA 568A/B compliant ensuring compatibility and reliability
- Fully stamped shielding offers isolation from EMI/RFI



### RJ 11 Features

- Provides access to a telephone port
- Designed for easy installation in the vehicle's switch panel
- Standard RJ11 Connector
- Fully stamped shielding offers isolation from EMI/RFI

Part Number	Description	Connectors	Category	Temperature Range	Dimensions			Wt.
					L	W	H	
091-227	Data Port	RJ45	3, 5E, 6 & 6A	-50°F to +150°F	1.73"	0.98"	1.73"	0.25
091-227-RJ11	Telephone Port	RJ11		-50°F to +150°F	1.73"	0.98"	1.73"	0.25

# DASHMOUNT ACCESSORIES

## AUTO TOUCH • TEMPERATURE MONITOR • MINI VOLTAGE METER



### Touch Sensitive Switch

#### Features

- Low side switch
- Touch-On / Touch-Off switch
- Built-in LED illuminates when the switch is on
- Lexan® front panel designed for years of durability
- Reverse polarity protected
- Designed for easy installation in the vehicle's switch panel
- Available as a toggle or momentary switch
- Time delay option also available

Part Number	Description	Electrical Data			Dimensions			Wt.
		DC Volts	Quiescent Current	Switch Rating	L	W	H	
091-222	Auto Touch, Toggle Switch	8-20	0.020 Amps Max	5.0 Amps Max	1.73"	0.98"	1.73"	.25
091-222-MOM	Auto Touch, Momentary Switch	8-20	0.020 Amps Max	5.0 Amps Max	1.73"	0.98"	1.73"	.25
091-222-TD-1	Auto Touch, Timed Delay	8-20	0.020 Amps Max	5.0 Amps Max	1.73"	0.98"	1.73"	.25

### Temperature Monitor

#### Features

- Designed for easy installation in the vehicle's switch panel
- Large 7 segment green LED display
- Reverse polarity protected
- Easy connection to a 12V or 24V switched ignition
- Temperature monitor blinks at 32° F and below to indicate roads may be icy



Remote Sensor with  
16' cable included  
with Temperature Monitor

### Mini Battery Voltage Meter

#### Features

- Monitors battery voltage
- Large 3 digit green LED display
- Reverse polarity protected
- Easy connection to a 12V or 24V switched ignition

Part Number	Description	Electrical Data		Dimensions			Wt.
		DC Volts	DC Amps	L	W	H	
091-224	Temperature Monitor °F	12	0.25A	1.73"	0.98"	1.73"	0.25
091-224C	Temperature Monitor °C	12	0.25A	1.73"	0.98"	1.73"	0.25
091-250-12	Mini Voltage Battery Meter	12	0.4A	1.73"	0.98"	1.73"	0.25
091-250-24	Mini Voltage Battery Meter	24	0.5A	1.73"	0.98"	1.73"	0.25



### Clock

#### Features

- 24 hour display (military time)
- OLED display
- Hour/Min using tactile switches
- Display may be switched with ignition to turn "ON" or "OFF" or to set to stay on continuously
- Easy connection to a 12V or 24V switched ignition

Part Number	Description	Electrical Data		Dimensions			Wt.
		DC Volts	DC Amps	L	W	H	
091-257	Switch Clock	10-30	0.0065	1.73"	0.98"	1.73"	0.25

# DASHMOUNT ACCESSORIES

## SHORE POWER • AIR ALARM • LEVEL ALARM

### Shore Power, Air Alarm, Level Alarm

#### Features

- 85dB alarm
- Built-in LED indicator
- Shore Power Alarm: Alerts Driver to disconnected Shore Line
- Air Line Alarm: Alerts Driver to disconnected Air Line
- Level Alarm: Optional audible alarm for Kussmaul Auto Level (p.31), Alerts driver to vehicle level with high decibel beeping
- Designed for easy installation in the vehicle's switch panel
- Reverse polarity protected
- Audible alarm sounds with illuminated LED



Part Number	Description	Electrical Data		Dimensions			Wt.
		DC Volts	DC Amps	L	W	H	
091-231-E	Shore Power Alarm, Eaton Euro	10-16	30mA	1.98"	1.02"	0.45"	.25
091-231-N	Shore Power Alarm, Eaton NGR	10-16	30mA	1.98"	1.02"	0.45"	.25
091-231-S	Shore Power Alarm, Eaton SVR	10-16	30mA	1.73"	0.98"	1.73"	.25
091-248-E	Air Line Alarm, Eaton Euro	10-16	30mA	1.98"	1.02"	0.45"	.25
091-248-N	Air Line Alarm, Eaton NGR	10-16	30mA	1.98"	1.02"	0.45"	.25
091-248-S	Air Line Alarm, Eaton SVR	10-16	30mA	1.73"	0.83"	1.73"	.25
091-260-S (Available in 24V)	Level Alarm, <i>Optional</i> Audible Alarm for Auto Level (p.31)	10-16	30mA	1.73"	0.83"	1.73"	.25

### Wireless Audio Via Any Cell Phone

#### Features

- Provides a fully integrated solution for delivering high quality stereo audio in a small form factor
- Fully certified Bluetooth version 3.0 audio module, fully compatible with Bluetooth version 2.1+EDR, 1.2, and 1.1
- Dual-channel, differential audio output for the highest quality audio
- FCC Certification
- Bluetooth SIG Certified
- Profiles include HSP/HFP, A2DP, AVRCP, SPP, and iAP
- Operation Range is 10 meters (33 feet)
- Designed for easy installation in the vehicle's switch panel
- Easy connection to a 12V switched ignition
- Optional mic is available



Part Number	Description	Electrical Data		Dimensions			Wt.
		DC Volts	DC Amps	L	W	H	
091-226	Bluetooth Module	11-16V	0.25A	1.73"	0.98"	1.73"	.25
091-226-007	Optional Mic						



# INDEX SORTED BY DESCRIPTION

Part Number	Description	Page
091-150-115	AC Auto Pump Timer	45
WPR-1-XX	AC Connector	41
020-0018-5	ACCY-IIX	58
020-0008-9	ACCY-IX	58
020-0004-5	AC-II	58
020-0003-5	AC-IX	58
100-4407-5	AFB-500 Fuse Block	78
091-28	Air Eject	37
091-248	Air Eject Alarm	89
RT450-OLP	Air Line Reel	82
091-98-12	Alternate Action Relay	73
100-0XX0-0	ANL Fuses	78
091-178-8	Audible Annunciator	86
091-249	Audio USB Pass Thru	86
091-215-12	Auto Charge 1000 PLC	12
091-11-12	Auto Charge 11	19
091-11DV-12	Auto Charge 11 DV	19
091-11HO-12	Auto Charge 11 HO	19
091-11HO-DV-12	Auto Charge 11 HO DV	19
091-11HO-PIM	Auto Charge 11 HO PIM	19
091-11PIM	Auto Charge 11 PIM	19
091-165-12	Auto Charge 12	9
091-165-12-DV	Auto Charge 12 DV	11
091-170-12	Auto Charge 12 HO	11
091-170-12-DV	Auto Charge 12 HO DV	11
091-170-PIM	Auto Charge 12 HO PIM	11
091-12PIM	Auto Charge 12 PIM	11
091-187-12	Auto Charge 1200	14
091-187-12-REMOTE	Auto Charge 1200 Remote	15
091-10-12	Auto Charge 20	21
091-216-20/20	Auto Charge 20/20	13
091-237-12	Auto Charge 2000 PLC	20
091-35/10	Auto Charge 35/10	16
091-216-40/20	Auto Charge 40/20	17
091-11-102-12	Auto Charge Display	30
091-9G-2	Auto Clean	39
091-22-X	Auto Current	70
091-22-A	Auto Current A	70
091-22-A-6	Auto Current A-6	70
091-22F-X	Auto Current F	71
091-22F-A	Auto Current F-A	71
091-22F-A-6	Auto Current F-A-6	71
091-9-090	Auto Drain, 120V HP Pump	45
091-9-089	Auto Drain, 120V Pump	45
091-9-131	Auto Drain, 12V Pump	45
091-134	Auto Interlock II	60
091-134A	Auto Interlock III	60
091-197	Auto Interlock IV	60

Part Number	Description	Page
091-208-CONT-12	Auto Isolator 3 Controller	65
091-139-CONT-12	Auto Isolator I Controller	65
091-139-SOL-12HO	Auto Isolator Solenoid	65
091-251	Auto-Level	31
091-9B-4-AD	Auto Pump AC, w/ Auto Drain	43
091-9HP	Auto Pump HP	44
091-9HP-220	Auto Pump HP, 220V	44
091-9HP-AD	Auto Pump HP, w/ Auto Drain	44
091-198-12-AP	Auto Pump Status Center	29
091-198-12-PP	Auto Pump Status Center	28
091-205	Auto Pump Tester	45
091-150	Auto Pump Timer	45
091-220-120-20	Auto Reel	82
091-220-120-20-SL	Auto Reel w/Auto Safe	82
091-84	Auto Throttle 1	84
091-222	Auto Touch	88
091-137	Battery Saver Filter	64
091-195-12	Battery Saver Low Ripple	25
091-256-12	Battery Saver LR40, VHO	25
091-226	Bluetooth Module	89
002-359X-X	Bus Bars	80
091-266-12-40	Chief Series	10
091-55-059	Connector Protector	41
Contact Sales	Custom Panels	59
091-239	Dashmount Accessory	86
091-227	Data Port - RJ45	87
IN-3-XX	DC Ammeter	30
023-1001-0	DC Amps Display, 100A	29
023-0502-0	DC Amps Display, 50A	29
091-3-157	DC Connector	41
420-2403-0	DC Converters 24-12-3	64
420-3550-0	DC Converters 32-12-10	64
420-3535-0	DC Converters 32-12-15	64
420-3544-0	DC Converters 32-12-25	64
420-3545-0	DC Converters 32-12-35	64
420-3536-0	DC Converters 32-12-50	64
420-3826-0	DC Converters 32-12-6	64
023-4346-0	DCE	31
023-4348-0	DCV	31
61-11-6106	Digital Display (194C), for single battery, 15A chargers with output of 80A	35
091-39-109	Display Panel Rear Seal	30
091-178-10A	10 Door Display	86
091-178-7A	7 Door Display	86
091-39-IND	Dual Bar Graph Display	29
091-66-IND	Dual Bar Graph Display	29
091-189-2-12	Dual Status Center, 1	28
091-189-2-12-3.5D	Dual Status Center, 2	28

# INDEX SORTED BY DESCRIPTION

Part Number	Description	Page
091-76-XX	Dual Universal Display	29
091-18-098	Dynamic Disconnect	33
020-1030-0	ES-3	56
020-1040-0	ES-4	56
020-1050-0	ES-5	56
020-1060-0	ES-6	56
020-1070-0	ES-7	56
091-90-12	Euro Charger I	23
091-162-12	Euro Charger I VHO	23
091-117-12	Euro Charger II	23
091-143-12	Euro Charger II VHO	23
091-118-12	Euro Charger III	24
445-5393-0	EV-20	18
445-5262-0	EV-40	18
091-185-008	E-Z Mounting Plate, Large	77
091-185-007	E-Z Mounting Plate, Medium	77
091-185-006	E-Z Mounting Plate, Small	77
091-200-EZM	E-Z Slide Mount Plate	77
	Freedom eGen	2
808-0817-01	Freedom X / XC remote panel w/ 25' Cable	61
5-15P-H	Female Connector	41
5-20P-H	Female Connector	41
6-15P-H	Female Connector	41
091-28HP	HP Air Eject	39
817-1000	Inverter Freedom X 1000	61
817-2000	Inverter Freedom X 2000	61
817-3000	Inverter Freedom X 3000	61
444-5280-0	Kick Plate Guard, EV-20/EV-40	18
Contact Sales	Kits and Packages	49-52
IN-4	LED Display	30
091-11-102-12	LED Display	30
091-260-S	Level Alarm	31
091-32	Load Manager	68
091-96-12	Load Manager 1 H	67
091-167-12	Load Manager 1 HP	67
091-79	Load Manager 2	68
091-141	Load Manager P	66
091-85-12	Low Voltage Alarm	73
091-207-12	LPC 20	9
091-200-12	LPC 40, PLC	8
091-206-24	LPC 45	22
445-4290-5	LPC 7	7
091-206-12	LPC 80	9
091-200-IND	LPC Bar Graph Display	29
5278C	Male Receptacle	41
5378C	Male Receptacle	41
5678C	Male Receptacle	41
425-5750-0	MDP-25	63


Part Number	Description	Page
091-250-12	Mini Battery Voltage Meter	88
091-9HP-H	Mounting Plate, 120V HP Pump	45
091-9H-1	Mounting Plate, 120V Pump	45
091-9-12V-HP-H	Mounting Plate, 12V Pump	45
091-185-011	Mounting Plate, Air Eject	77
444-5279-0	Mounting Plate, EV-20/EV-40	18
091-182-027-120	Mounting Plate, Super 16	77
091-159-081	Mounting Plate, Super 30	77
091-228-002-XXX	Mounting Plate, Super AE, Display	77
091-185-009	Mounting Plate, Super Auto Eject	77
091-185-010	Mounting Plate, WP Auto Eject	77
091-NP-0X	Nameplate, 091-3XX Covers	40
091-55NP-0X	Nameplate, 091-55XX Covers	40
425-2988-X	NP-12 with / without switch	63
426-3222-0	NS-12-20 StartGuard	63
091-108-012	OV Relay	72
380-2010-1	PC-10	64
380-1258-1	PC-25	64
390-5711-0	PDS-100	75
L4545 12 3 3	Power Cord Reel	82
390-0030-5	Power Timer	66
51-21-1000	Pump Plus 1000 PLC	47
52-21-1100	Pump Plus 1200 PLC	48
53-21-1100	Pump Plus 2000 PLC	49
56-21-1100	Pump Plus HO	50
IN-4	Pump Plus HO Display	50
091-18CP	Rear Enclosure for Auto Eject	33
VW-10	Receptacle / Cover	41
VW-11	Receptacle / Cover	41
VW-12	Receptacle / Cover	41w
091-32-029X-XX	Relay Board 2	74
091-32-024X-XX	Relay Board 4	74
091-178-9	Relay Output	86
091-18D-14	Retractable Cord	41
091-18D-12	Retractable Cord	41
091-133-R	RF Receiver	83
091-133-T	RF Transmitter	87
091-148-12	Safety Lock	88
091-155	Safety Lock 3	88
091-160	Safety Lock 4	88
091-174	Safety Lock D	88
091-231	Shore Power Alarm	93
091-199-001	Single Bar Graph Display	29
091-189-12	Single Status Center, 1	28
091-189-12-3.5D	Single Status Center, 2	28
091-94-XX	Single Universal Display	29
091-27	Soft Start	69
781-0100-01	Solar Flex Kit 110W	55

# INDEX SORTED BY DESCRIPTION

Part Number	Description	Page
781-0100-02	Solar Flex Expansion Kit 110W	55
780-0100-01	Solar Kit 100W	56
780-0160-01	Solar Kit 160W	56
780-0100-02	Solar Exp Kit 100W	56
780-0160-02	Solar Exp Kit 160W	56
091-194X-IND	Status Center	28
091-182-230-12	Super 16 Auto Eject, 12V	38
091-182-230-24	Super 16 Auto Eject, 24V	38
091-182-CON-3P-230	Super 16 Connector, 230V	38
091-169-CON-4P-120	Super 30 AE Connector, 120V	38
091-169-CON-4P-250	Super 30 AE Connector, 250V	38
091-159-30-120	Super 30 Auto Eject	36
091-159-30-250	Super 30 Auto Eject	37
091-159-430-250	Super 30 Auto Eject	36
091-169-30-120	Super 30 Auto Eject - AE	37
091-169-30-250	Super 30 Auto Eject - AE	37
091-159-CON-3P-120	Super 30 Connector, 120V	36
091-159-CON-3P-250	Super 30 Connector, 250V	36
091-55-15-120	Super Auto Eject	34
091-55-20-120	Super Auto Eject	34
091-55-15-DC	Super Auto Eject	34
091-55-15-120T	Super Trailer Ejects	34
61-11-2106	Super Auto Eject, Deluxe Cover-Bar (15A)	35
61-11-3106	Super Auto Eject, Deluxe Cover-194 Digital (15A)	35
61-11-7106	Super Auto Eject, Deluxe Cover- Dual	35
63-11-2106	Super Auto Eject, Deluxe Cover-Bar (20A)	35
63-11-3106	Super Auto Eject, Deluxe Cover-194-Digital (20A)	35
091-55-239-XXX	Super Auto Eject Deluxe Cover Bar Graph Dual (indicator and cover only)	30, 40
091-55-194X-XXX	Super Auto Eject Deluxe Cover Digital. Display (indicator and cover only)	30, 40
091-55-269-XX	Super Auto Eject Deluxe Cover Digital. Display (indicator and cover only) (for AP 200/3000)	30, 40
091-227-RJ11	Telephone Port - RJ11	87
091-257	Switch Clock	88
091-224	Temperature Monitor	89
064-3589-X	Terminal Strips	80
023-4350-0	TG-3	31
091-103-012-X	Time Delay - DODO	74
091-74-IND	Triple Bar Graph Display	29
091-118-022-XX	Triple Universal Display	29
00-K1M-XX	Two Way Radio Charger- (1 unit)	85
500-K2M-XX	Two Way Radio Charger- (2)	85
500-K6M-XX	Two Way Radio Charger- (6)	85
500-K12M-XX	Two Way Radio Charger- (12)	85
KVOAPX1	Two Way/Vehicle Only Battery Charger (1)	85
KVOAPX4	Two Way/Vehicle Only Battery Charger (4)	85
091-214-12	Universal Timer, 12 Volt	69

Part Number	Description	Page
091-214-24	Universal Timer, 24 Volt	69
091-219-038-1	USB EZ Mount Assembly	86
091-219-XX	USB Dual Ports (USB-C)	87
091-45	UV OV Relay	72
023-4500-0	VAAFH Meter	27
091-247	VAAFH Meter	27
091-214-120/240	Vac Power Adapters 120/240	73
091-91-013	Vertical Display Mount	30
460-0610-0	Voltage Stabilizer 12-12-12I	64
460-0617-0	Voltage Stabilizer 32-12-25	64
460-0123-0	Voltage Stabilizer 12-12-3I	64
460-1212-0	Voltage Stabilizer 12-12-6I	64
023-4400-0	VOTT Meter	27
090-0XX0-0	Waterproof Circuit Breakers	78
007-200X-0	Waterproof Fittings, CCX	80
007-20X0-0	Waterproof Fittings, RA	80
007-300X-0	Waterproof Junction Box, PX	79
091-194X-IND-WT-XX	Watertight Status Center	28
091-28AK-XX	Weatherproof Adapter Kit	39
091-55XX	Weatherproof Cover, Super	40
091-182XX	Weatherproof Cover, Super 16	40
091-159XX	Weatherproof Cover, Super 30	40
091-3XX	Weatherproof Cover, WP	40
007-600X-0	Weatherproof Junction Box, BX	79
VW-X-(XX)	Wires, Wiring Kits, Wire Accessories	41
091-18WP-120	WP Auto Eject	33
091-20WP-120	WP Auto Eject	33
091-18WP-012	WP Auto Eject	33
	ZeroRPM	3



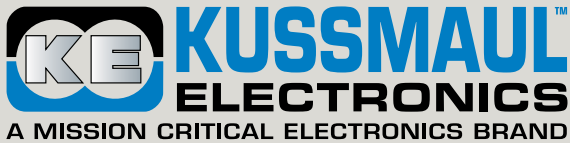

To all our valued customers,

Please contact us with any questions or clarifications regarding product selection, installation, function, warranty, et al. Our knowledgeable and experienced staff is well versed in emergency vehicle electrical systems, components, and product applications. If you experience issues with our products, below is a brief and simplified summary of how you can depend on us to support in-service products. Our complete warranty statement can be accessed via [kussmaul.com/warranty-policy](http://kussmaul.com/warranty-policy).

Call us at **800-346-0857** if you experience problems with any of our products. In many cases, we can troubleshoot and resolve the issue over the phone. If sending the unit in is required, please visit our **CUSTOMER SUPPORT** section on our website, [kussmaul.com](http://kussmaul.com) and click on the **RETURNS** link. Once the return part is received, our staff is committed to repairing and returning it within 3 business days. If you need it sooner, we can arrange same day turn around with expedited shipping.

#### **Battery Chargers:**

If your Charger has been in service for less than 3 years, we will perform the repairs with return shipping at no charge. If your charger is more than 3 years old, we have a flat rate repair cost and support our repair work with a 6-month warranty. We have been producing chargers for over 50 years and replacement parts are no longer available for some models. In which case we will offer you a trade-in allowance towards a new unit.

#### **Auto Ejects:**

If your Auto Eject is in service for less than 2 years, we will perform the repairs with return shipping at no charge. If your Auto Eject is more than 2 years old, we have a flat repair fee and we support our repair work with a 6-month warranty.

#### **Air Compressor Pumps:**

If your air compressor is in service for less than 2 years, we will perform the repairs with return shipping at no charge. If your compressor is more than 2 years old, we have a flat rate repair fee and we support our repair work with a 3-month warranty. These pumps can be rebuilt by either our technical support staff or we can supply you with a rebuild kit.

#### **Electronic Displays and Accessories:**


Displays and indicators use long life LED's and thus rarely need replacement. If a malfunction does occur, some units can be repaired while others need to be replaced. Contact us and we will advise the best course of action. If a malfunction occurs within 3 years of installation, we will replace or repair it free of charge. Other accessory products contain relays, which may wear overtime and can be repaired. These too will be repaired at no charge within 3 years.

We remain faithfully in your service,

**Dale Tompkins**

President, Vehicle Power

Power products designed and built specifically  
for the righteous demands of emergency vehicles

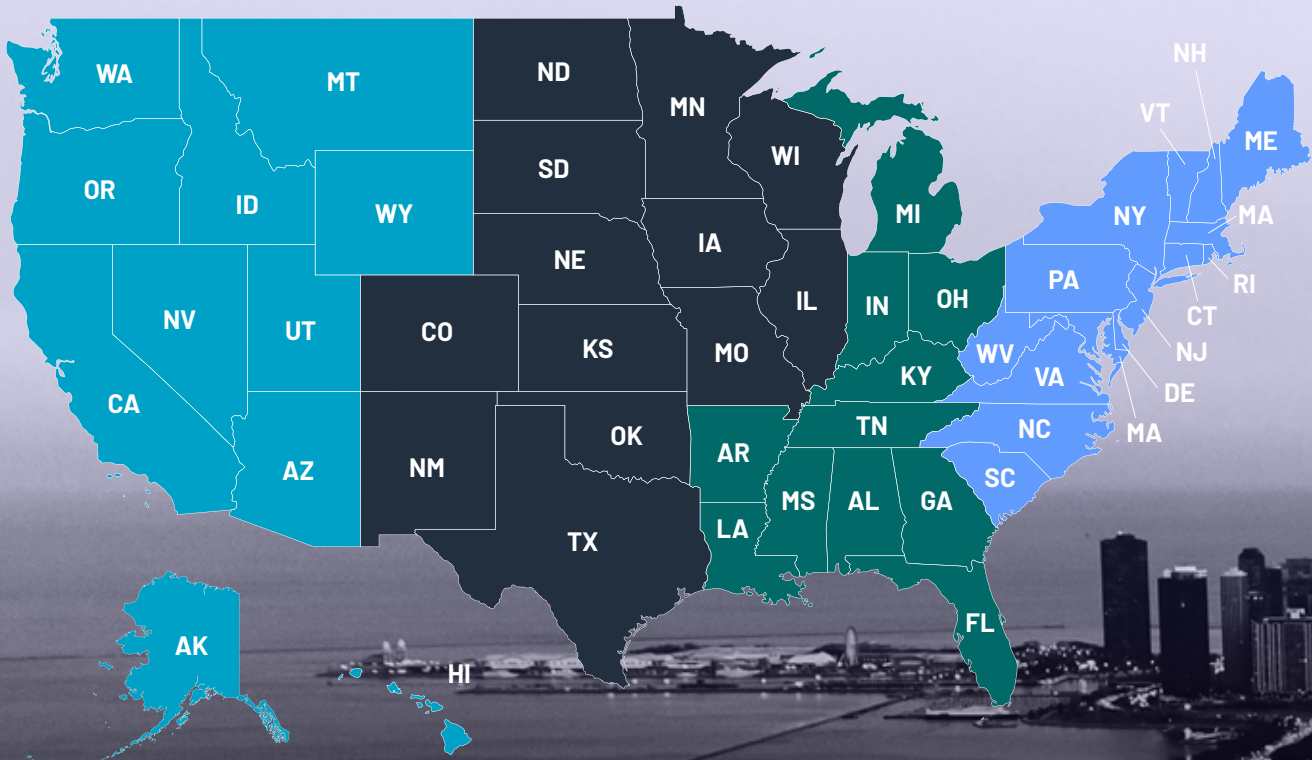

CONNECT WITH THE REPRESENTATIVE THAT SERVICES YOUR REGION

### Ray Paul

Sales Manager, Western Region  
916.296.5301  
[raypaul@kussmaul.com](mailto:raypaul@kussmaul.com)

### Pat Hester

Sales Manager, Great Plains Region  
262.707.5188  
[hester@kussmaul.com](mailto:hester@kussmaul.com)

### Jeff McKittrick

Sales Manager, Midwest Region  
614.800.1754  
[jeffrey.mckittrick@kussmaul.com](mailto:jeffrey.mckittrick@kussmaul.com)

### Brian Cassell

Sales Manager, Northeast Region  
570.728.5881  
[cassell@kussmaul.com](mailto:cassell@kussmaul.com)

### Danny Graham

Director of Sales, USA  
812.592.6861  
[graham@kussmaul.com](mailto:graham@kussmaul.com)



MCE VEHICLE POWER



PURKEYS

xantrex



ZERO RPM

MORE INFORMATION

STAY CONNECTED